

Contractor's Pricing Guide: Residential Repair & Remodeling Costs with RSMeans™ Data



2026

RSMeans Data from Gordian

Construction Publishers & Consultants
30 Patewood Dr., Suite 350
Greenville, SC 29615
United States of America
1.800.874.2291
rsmeans.com

Copyright 2025 by The Gordian Group Inc.
All rights reserved.

Cover photo © iStock.com/quackersnaps

Printed in the United States of America
ISSN 1542-9156
ISBN 978-1-967675-19-7

Gordian's authors, editors, and engineers apply diligence and judgment in locating and using reliable sources for the information published. However, Gordian makes no express or implied warranty or guarantee in connection with the content of the information contained herein, including the accuracy, correctness, value, sufficiency, or completeness of the data, methods, and other information contained herein. Gordian makes no express or implied warranty of merchantability or fitness for a particular purpose. Gordian shall have no liability to any customer or third party for any loss, expense, or damage, including consequential, incidental, special, or punitive damage, including lost profits or lost revenue, caused directly or indirectly by any error or omission, or arising out of, or in connection with, the information contained herein. For the purposes of this paragraph, "Gordian" shall include The Gordian Group, Inc., and its divisions, subsidiaries, successors, parent companies, and their employees, partners, principals, agents and representatives, and any third-party providers or sources of information or data. Gordian grants the purchaser of this publication limited license to use the cost data

contained herein for purchaser's internal business purposes in connection with construction estimating and related work. The publication, and all cost data contained herein, may not be reproduced, integrated into any software or computer program, developed into a database or other electronic compilation, stored in an information storage or retrieval system, or transmitted or distributed to anyone in any form or by any means, electronic or mechanical, including photocopying or scanning, without prior written permission of Gordian. This publication is subject to protection under copyright law, trade secret law and other intellectual property laws of the United States, Canada and other jurisdictions. Gordian and its affiliates exclusively own and retain all rights, title and interest in and to this publication and the cost data contained herein including, without limitation, all copyright, patent, trademark and trade secret rights. Except for the limited license contained herein, your purchase of this publication does not grant you any intellectual property rights in the publication or the cost data.

Table of Contents

Foreword	vii
How the Cost Data Is Built: An Overview	ix
How to Use the Cost Data: The Details	xi
Unit Price Section	xiii
RSMeans™ Data: Unit Prices—How They Work	xv
Reference Section	
Location Factors	295
Abbreviations	301
Index	302
Other Data and Services	318
Labor Trade Rates including Overhead & Profit	Inside Back Cover

Foreword

The Value of RSMeans™ Data from Gordian

Since 1942, RSMeans Data has been the industry-standard materials, labor, and equipment cost information database for contractors, facility owners and managers, architects, engineers and anyone else that requires the latest localized construction cost information. More than 80 years later, the objective remains the same: to provide facility and construction professionals with the most current and comprehensive construction cost database possible.

With the constant influx of new construction methods and materials, in addition to ever-changing labor and material costs, last year's cost data is not reliable for today's designs, estimates or budgets. Gordian's cost engineers apply real-world construction experience to identify and quantify new building products and methodologies, adjust productivity rates and adjust costs to local market conditions across the nation. This adds up to more than 30,000 hours in cost research annually. This unparalleled construction cost expertise is why so many facility and construction professionals rely on RSMeans Data year over year.

About Gordian

Gordian is the leading provider of Building Intelligence™ Solutions, delivering unrivaled insights, robust technology and comprehensive expertise that fuel customers' success during every phase of the building lifecycle. Gordian created Job Order Contracting (JOC) and the industry

standard RSMeans Data. We empower organizations to optimize capital investments, improve project performance and minimize long-term operating expenses. We develop and maintain the largest collection of labor, material, and equipment data and associated costs for all areas of construction. Gordian's solutions are accessed through our innovative software platforms and supported by a team of industry experts proven to help clients maximize efficiency, optimize cost savings, and increase building quality.

Our Commitment

At Gordian, we do more than talk about the quality of our data and the usefulness of its application. We stand behind all of our RSMeans Data — from historical cost indexes to construction materials and techniques — to craft current costs and predict future trends. If you have any questions about our products or services, please call us toll-free at 800.874.2291 or visit our website at rsmeans.com.

How the Cost Data Is Built: An Overview

A Powerful Construction Tool

You have in your hands one of the most powerful construction tools available today. A successful project is built on the foundation of an accurate and dependable estimate. This data will enable you to construct such an estimate.

For the casual user the data is designed to be:

- quickly and easily understood so you can get right to your estimate.
- filled with valuable information so you can understand the necessary factors that go into the cost estimate.

For the regular user, the data is designed to be:

- a handy reference that can be quickly referred to for key costs.
- a comprehensive, fully reliable source of current construction costs, so you'll be prepared to estimate any project.
- a source for project costs, product selections, and alternate materials and methods.

To meet all of these requirements we have organized the data into the following clearly defined sections.

Unit Price Section

The cost data has been divided into 23 sections representing the order of construction. Within each section is a listing of components and variations of those components that are applicable to that section. Costs are shown for the various actions that must be done to that component.

Reference Section

This section includes information on Location Factors and a listing of abbreviations.

Location Factors

You can adjust total project costs to over 900 locations throughout the U.S. and Canada by using the data in this section.

Abbreviations

A listing of the abbreviations used throughout, along with the terms they represent, is included.

Index

A comprehensive listing of all terms and subjects will help you quickly find what you need when

you are not sure where it falls in the order of construction.

The Scope of this Data

This data is designed to be as comprehensive and easy to use as possible. To that end we have made certain assumptions and limited its scope in two key ways:

1. We have established material prices based on a national average.
2. We have computed labor costs based on residential wage rates.

Project Size

This data is intended for use by those involved primarily in residential repair and remodeling construction costing between \$10,000 and \$100,000.

With reasonable exercise of judgment, the figures can be used for any building work. For other types of projects, such as new home construction or commercial buildings, consult the appropriate RSMeans dataset for more information.

How to Use the Cost Data: The Details

What's Behind the Numbers? The Development of Cost Data

RSMeans™ Data engineers continually monitor developments in the construction industry in order to ensure reliable, thorough, and up-to-date cost information. While overall construction costs may vary relative to general economic conditions, price fluctuations within the industry are dependent upon many factors. Individual price variations may, in fact, be opposite to overall economic trends. Therefore, costs are constantly tracked and complete updates are performed yearly. Also, new items are frequently added in response to changes in materials and methods.

Costs in U.S. Dollars

All costs represent U.S. national averages and are given in U.S. dollars. The City Cost Index (CCI) with RSMeans Data or Location Factors can be used to adjust costs to a particular location. The CCI or Location Factors for Canada can be used to adjust U.S. national averages to local costs in Canadian dollars. No exchange rate conversion is necessary because it has already been factored in.

Material Costs

RSMeans Data engineers contact manufacturers, dealers, distributors, and contractors all across the U.S. and Canada to determine national average material costs. If you have access to current material costs for your specific location, you may wish to make adjustments to reflect differences from the national average. Included within material costs are fasteners for a normal installation. RSMeans Data engineers use manufacturers' recommendations, written specifications, and/or standard construction practices for the sizing and spacing of fasteners. Adjustments to material costs may be required for your specific application or location. The manufacturer's warranty is assumed. Extended warranties are not included in the material costs.

Material costs do not include sales tax.

Labor Costs

Labor costs are based upon a mathematical average of trade-specific wages in 30 major U.S. cities. The type of wage (union, open shop, or residential) is identified on the inside back cover of printed publications or selected by the estimator when using the electronic products. Markups for the wages can also be found on the inside back cover of printed publications and/or under the labor references found in the electronic products.

- If wage rates in your area vary from those used, or if rate increases are expected within a given year, labor costs should be adjusted accordingly.

Labor costs reflect productivity based on actual working conditions. In addition to actual installation, these figures include time spent during a normal weekday on tasks, such as material receiving and handling, mobilization at the site, site movement, breaks, and cleanup.

Productivity data is developed over an extended period so as not to be influenced by abnormal variations and reflects a typical average.

Equipment Costs

Equipment costs include not only rental but also operating costs for equipment under normal use. The operating costs include parts and labor for routine servicing, such as the repair and replacement of pumps, filters, and worn lines. Normal operating expendables, such as fuel, lubricants, tires, and electricity (where applicable), are also included. Extraordinary operating expendables with highly variable wear patterns, such as diamond bits and blades, are excluded. These costs are included under materials. Equipment rental rates are obtained from industry sources throughout North America—contractors, suppliers, dealers, manufacturers, and distributors.

Rental rates can also be treated as reimbursement costs for contractor-owned equipment. Owned equipment costs include depreciation, loan payments, interest, taxes, insurance, storage, and major repairs.

Equipment costs do not include operators' wages.

Factors Affecting Costs

Costs can vary depending upon a number of variables. Here's a listing of some factors that affect costs and points to consider.

Quality—The prices for materials and the workmanship upon which productivity is based represent sound construction work. They are also in line with industry standards and manufacturer specifications and are frequently used by federal, state, and local governments.

Overtime—We have made no allowance for overtime. If you anticipate premium time or work beyond normal working hours, be sure to make an appropriate adjustment to your labor costs.

Productivity—The productivity, daily output, and labor-hour figures for each line item are based on an eight-hour work day in daylight hours in moderate temperatures and up to a 14' working height unless otherwise indicated. For work that extends beyond normal work hours or is performed under adverse conditions, productivity may decrease.

Size of Project—The size, scope of work, and type of construction project will have a significant impact on cost. Economies of scale can reduce costs for large projects. Unit costs can often run higher for small projects.

Location—Material prices are for metropolitan areas. However, in dense urban areas, traffic and site storage limitations may increase costs. Beyond a 20-mile radius of metropolitan areas, extra trucking or transportation charges may also increase the material costs slightly. On the other

hand, lower wage rates may be in effect. Be sure to consider both of these factors when preparing an estimate, particularly if the job site is located in a central city or remote rural location. In addition, highly specialized subcontract items may require travel and per-diem expenses for mechanics.

Other Factors—

- season of year
- contractor management
- weather conditions
- local union restrictions
- building code requirements
- availability of:
 - adequate energy
 - skilled labor
 - building materials
- owner's special requirements/restrictions
- safety requirements
- environmental considerations
- access

Unpredictable Factors—General business conditions influence "in-place" costs of all items. Substitute materials and construction methods may have to be employed. These may affect the installed cost and/or life cycle costs. Such factors may be difficult to evaluate and cannot necessarily be predicted on the basis of the job's location in a particular section of the country. Thus, where these factors apply, you may find significant but unavoidable cost variations for which you will have to apply a measure of judgment to your estimate.

Final Checklist

Estimating can be a straightforward process provided you remember the basics. Here's a checklist of some of the steps you should remember to complete before finalizing your estimate.

Did you remember to:

- Factor in the City Cost Index or Location Factors for your locale?
- Take into consideration which items have been marked up and by how much?

- Mark up the entire estimate sufficiently for your purposes?
- Read the background information on techniques and technical matters that could impact your project time span and cost?
- Include all components of your project in the final estimate?
- Double check your figures for accuracy?
- Call RSMeans Data engineers if you have any questions about your estimate or the data you've used? Remember, Gordian stands behind all of our products, including our extensive RSMeans Data solutions. If you have any questions about your estimate, about the costs you've used from our data, or even about the technical aspects of the job that may affect your estimate, feel free to call the Gordian RSMeans editors at 1.800.874.2291.

Unit Price Section

Table of Contents

	Page		Page		Page
Job Costs		Exterior Trim		Rough Mechanical	
Construction Fees	1	Exterior Trim	65	Plumbing	147
Construction Permits	1	Fascia	67	Water Heater	148
Trade Labor	2	Soffit	69	Ductwork	150
Temporary Utilities	3	Roofing		Heating	153
Equipment Rental	3	Metal Flashing	71	Furnace Unit	154
Move/Reset Contents	6	Roof Shingles	73	Boiler	156
Cover and Protect	6	Rolled Roofing	73	Heat Pump	157
Temporary Bracing	6	Composition Shingles	73	Heating	158
Jack and Relevel	7	Wood Shingles	75	Heating Control	159
Dumpster Rental	7	Slate Tile Roofing	76	Air Conditioning	159
Debris Hauling	7	Flat Clay Tile Roofing	77	Sprinkler System	163
Dump Fees	7	Mission Tile Roofing	77		
Scaffolding	7	Spanish Tile Roofing	78	Rough Electrical	
Construction Clean-up	8	Concrete Tile Roofing	80	Electrical Per S.F.	165
		Aluminum Sheet	81	Main Service	165
Job Preparation		Fiberglass Sheet	83		
Building Demolition	9	Galvanized Steel	83	Insulation	
General Clean-up	10	Standing Seam	84	Floor Insulation	167
Flood Clean-up	10	Elastomeric Roofing	85	Wall Insulation	168
Asbestos Removal	12	Modified Bitumen Roofing	87	Ceiling Insulation	170
Room Demolition	13	Built-up Roofing	87	Exterior Insulation	172
Selective Demolition	14			Roof Insulation Board	172
Excavation		Exterior Doors and Windows		Walls/Ceilings	
Excavation	17	Exterior Type Door	89	Wall Plaster	175
Backfill	17	Residential Metal Door	91	Ceiling Plaster	176
		Metal Door	92	Gypsum Wallboard	177
Foundation		Solid Core Door	93	Ceramic Wall Tile	180
Piles	19	Components	96	Wall Tile	181
Foundation Post	23	Sliding Patio Door	99	Wall Paneling	182
Concrete Footing	24	Screen Door	101	Wallcovering	184
Concrete Slab	25	Storm Door	102	Acoustical Ceiling	187
		Garage Door	102		
Rough Frame/Structure		Commercial Metal Door	104	Finish Carpentry	
Beam/Girder	27	Aluminum Window	106	Hollow Core Door	191
Column	29	Vinyl Window	113	Solid Core Door	195
Floor Framing System	29	Wood Window	114	Bifold Door	196
Subflooring	33	Window Screens	118	Louver Door	199
Wall Framing System	34	Window Glass	119	Bypass Sliding Door	200
Rough-in Opening	38	Storefront System	120	Base Molding	201
Glue-Laminated Beams	42	Curtain Wall System	122	Molding	204
Metal Stud Framing	44	Skylight	123	Window Trim Set	205
Metal Joist	45	Industrial Steel Window	124	Window Sill	206
Exterior Sheathing	45	Masonry		Shelving	206
Plywood Sheathing	46	Masonry Wall	125	Closet Shelving	207
Stairs	47	Chimney	129	Stair Assemblies	208
Ceiling Framing	47	Fireplace	129	Stairs	208
Roof Framing	49			Stair Components	209
Residential Trusses	54	Siding		Cabinets and Countertops	
Commercial Trusses	55	Exterior Siding	133	Wall Cabinets	211
Roof Sheathing	56	Site Work		Tall Cabinets	218
Wood Deck	57	Grading	139	Base Cabinets	222
Porch	63	Asphalt Paving	139	Countertop	229
		Masonry Pavers	139	Vanity Cabinets	231
		Fencing	140	Vanity Cabinet Tops	234

Table of Contents (cont.)

	Page		Page		Page
Painting		Finish Mechanical (cont.)		Improvements/Appliances/ Treatments (cont.)	
Paint Preparation, Walls.....	235	Bathtub	255	Refrigerator	279
Paint Preparation, Ceilings	236	Shower	257	Freezer	280
Paint/Texture, Walls.....	236	Ductwork	258	Dishwasher	281
Paint/Texture, Ceilings	237			Garbage Disposal	281
Flooring		Finish Electrical		Trash Compactor	281
Wood Plank Flooring.....	239	Electrical Per S.F.	261	Kitchenette Unit	281
Wood Parquet Tile Floor.....	241	Circuits	261	Bath Accessories	282
Ceramic Tile Flooring.....	243	Light Switch	262	Fire Prevention/Protection	283
Hard Tile Flooring	243	Cover for Outlet/Switch	264	Gutters	284
Sheet Vinyl Per S.F.	245	Residential Light Fixture	264	Downspouts	284
Sheet Vinyl.....	245	Commercial Light Fixture	266	Shutters	285
Vinyl Tile	245	Fan	268	Awning.....	287
Carpeting Per S.F.	246	Low Voltage Systems	269	Vent	288
Carpeting	247			Cupolas	289
Carpet Pad Per S.F.	248	Improvements/Appliances/Treatments		Aluminum Carport	290
Carpet Pad	249	Window Treatment	273	Storage Shed.....	290
Stair Components.....	249	Stairs	275	Gazebo.....	291
		Elevator	275	Pool.....	291
Finish Mechanical		Rangetop.....	276		
Commode	251	Rangehood	276		
Sink (assembly).....	252	Oven	277	Close Out	
Sink Only	253	Dryer	278	Construction Clean-up.....	293
		Washer	279		

RSMeans™ Data: Unit Prices—How They Work

The prices in this publication include all overhead and profit mark-ups for the installing contractor. If a general contractor is involved, an additional 10% should be added to the cost shown in the "Total" column.

The costs for material, labor, and any equipment are shown here. Material costs include delivery and a 10% mark-up. No sales taxes are included. Labor costs include all mark-ups as shown on the inside back cover of this dataset. Equipment costs also include a 10% mark-up.

The cost in the Total column should be multiplied by the quantity of each item to determine the total cost for that item. The sum of all items' total costs becomes the project's total cost.

The dataset is arranged into 23 categories that follow the order of construction for residential projects. The category is shown as white letters on a black background at the top of each page.

Graphics representing some of the cost items are found at the beginning of each category.

The cost data is arranged in a tree structure format. Major cost sections are left justified and shown as bold headings within a grey background. Cost items and sub-cost items are found under the bold headings. The complete description should read as "bold heading, cost item, sub-cost item."

For example, the identified item's description is "Beam/Girder, Solid Wood Beam, 2" x 8".

Each action performed to the cost item is conveniently listed to the right of the description. See the explanation below for the scope of work included as part of the action.

The unit of measure upon which all the costs are based is shown here. An abbreviations list is included within the Reference Section found at the back of this dataset.

A brief specification of the cost item is shown here.

Rough Frame / Structure



Rough Framing

Beam / Girder	Unit	Material	Labor	Equip.	Total	Specification
Solid Wood Beam						
2" x 8"						
Demolish	L.F.		1.09		1.09	Cost includes material and labor to
Install	L.F.	1.53	1.65		3.18	install 2" x 8" beam.
Demolish and Install	L.F.	1.53	2.74		4.27	
Clean	L.F.	11	36		47	
Paint	L.F.	22	2.38		2.70	
Minimum Charge	Job		269		269	
2" x 10"						
Demolish	L.F.		1.35		1.35	Cost includes material and labor to
Install	L.F.	2.08	1.79		3.87	install 2" x 10" beam.
Demolish and Install	L.F.	2.08	3.14		5.22	
Clean	L.F.	13	43		56	
Paint	L.F.	26	1.47		1.73	
Minimum Charge	Job		269		269	
2" x 12"						
Demolish	L.F.		1.64		1.64	Cost includes material and labor to
Install	L.F.	2.94	1.95		4.89	install 2" x 12" beam.
Demolish and Install	L.F.	2.94	3.59		6.53	
Clean	L.F.	15	51		66	
Paint	L.F.	47	3.53		4	
Minimum Charge	Job		269		269	
4" x 8"						
Demolish	L.F.		3.34		3.34	Cost includes material and labor to
Install	L.F.	12.70	2.50	2.60	17.80	install 4" x 8" beam.
Demolish and Install	L.F.	12.70	5.84	2.60	21.14	
Clean	L.F.	13	43		56	
Paint	L.F.	26	1.47		1.73	
Minimum Charge	Job		269		269	
4" x 10"						
Demolish	L.F.		4.18		4.18	Cost includes material and labor to
Install	L.F.	8.70	2.63	2.73	14.06	install 4" x 10" beam.
Demolish and Install	L.F.	8.70	4.81	2.73	18.24	
Clean	L.F.	15	51		66	
Paint	L.F.	30	1.72		2.02	
Minimum Charge	Job		269		269	
4" x 12"						
Demolish	L.F.		5		5	Cost includes material and labor to
Install	L.F.	12.30	2.77	2.88	17.95	install 4" x 12" beam.
Demolish and Install	L.F.	12.30	7.77	2.88	22.95	
Clean	L.F.	18	58		76	
Paint	L.F.	47	3.53		4	
Minimum Charge	Job		269		269	


Action

Demolish
Install
Demolish and Install
Reinstall
Clean
Paint
Minimum Charge

Scope

Includes removing the item and hauling the debris to a truck, dumpster, or storage area.
Includes the installation of the item with normal placement and spacing of fasteners.
Includes the demolish action and the install action.
Includes the reinstallation of a removed item.
Includes cleaning of the item.
Includes up to two coats of finish on the item (unless otherwise indicated).
Includes the minimum labor or the minimum labor and equipment cost. Use this charge for small quantities of material.

Job Costs

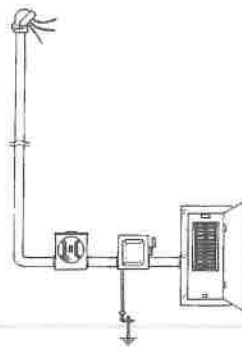

Scaffolding

Temporary Electrical Service

Air Compressor

Construction Fees		Unit	Material	Labor	Equip.	Total	Specification
Asbestos Test	Minimum Charge	Job		320		320	Minimum charge for testing.
Architectural	Minimum Charge	Day	3000			3000	Minimum labor charge for architect.
Engineering	Minimum Charge	Day	2550			2550	Minimum labor charge for field engineer.

Construction Permits		Unit	Material	Labor	Equip.	Total	Specification
Job (less than 5K)	Minimum Charge	Job	77.50			77.50	Permit fees, job less than 5K.
Job (5K to 10K)	Minimum Charge	Job	189			189	Permit fees, job more than 5K, but less than 10K.
Job (10K to 25K)	Minimum Charge	Job	370			370	Permit fees, job more than 10K, but less than 25K.
Job (25K to 50K)	Minimum Charge	Job	710			710	Permit fees, job more than 25K, but less than 50K.
Job (50K to 100K)	Minimum Charge	Job	1325			1325	Permit fees, job more than 50K, but less than 100K.
Job (100K to 250K)	Minimum Charge	Job	2725			2725	Permit fees, job more than 100K, but less than 250K.
Job (250K to 500K)	Minimum Charge	Job	5275			5275	Permit fees, job more than 250K, but less than 500K.
Job (500K to 1M)	Minimum Charge	Job	9550			9550	Permit fees, job more than 500K, but less than 1 million.

Job Costs

Trade Labor		Unit	Material	Labor	Equip.	Total	Specification
Carpenter							
Daily (8 hours)	Install	Day		540		540	Daily labor rate for one carpenter.
	Minimum Charge	Job		269		269	
Weekly (40 hours)	Install	Week		2700		2700	Weekly labor rate for one carpenter.
	Minimum Charge	Job		269		269	
Drywaller							
Daily (8 hours)	Install	Day		540		540	Daily labor rate for one carpenter.
	Minimum Charge	Job		269		269	
Weekly (40 hours)	Install	Week		2700		2700	Weekly labor rate for one carpenter.
	Minimum Charge	Job		269		269	
Roofer							
Daily (8 hours)	Install	Day		500		500	Daily labor rate for one skilled roofer.
	Minimum Charge	Job		250		250	
Weekly (40 hours)	Install	Week		2500		2500	Weekly labor rate for one skilled roofer.
	Minimum Charge	Job		250		250	
Painter							
Daily (8 hours)	Install	Day		440		440	Daily labor rate for one painter.
	Minimum Charge	Job		220		220	
Weekly (40 hours)	Install	Week		2200		2200	Weekly labor rate for one painter.
	Minimum Charge	Job		220		220	
Mason							
Daily (8 hours)	Install	Day		530		530	Daily labor rate for one skilled mason.
	Minimum Charge	Job		266		266	
Weekly (40 hours)	Install	Week		2650		2650	Weekly labor rate for one skilled mason.
	Minimum Charge	Job		266		266	
Electrician							
Daily (8 hours)	Install	Day		645		645	Daily labor rate for an electrician.
	Minimum Charge	Job		325		325	
Weekly (40 hours)	Install	Week		3225		3225	Weekly labor rate for an electrician.
	Minimum Charge	Job		325		325	
Plumber							
Daily (8 hours)	Install	Day		605		605	Daily labor rate for a plumber.
	Minimum Charge	Job		300		300	
Weekly (40 hours)	Install	Week		3025		3025	Weekly labor rate for a plumber.
	Minimum Charge	Job		300		300	
Common Laborer							
Daily (8 hours)	Install	Day		405		405	Daily labor rate for a common laborer.
	Minimum Charge	Job		202		202	

Job Costs

Trade Labor		Unit	Material	Labor	Equip.	Total	Specification
Weekly (40 hours)		Week		2025 202		2025 202	Weekly labor rate for a common laborer.
	Install Minimum Charge	Job					
Temporary Utilities		Unit	Material	Labor	Equip.	Total	Specification
Power Pole							
Job Site Electricity		Month	78	325		78 325	Includes average cost of electricity per month.
	Install Minimum Charge	Job					
Water Service							
Job Site Water		Month	144			144	Includes average costs for water for one month.
	Install Minimum Charge	Month	144			144	
Telephone							
		Month	113			113	Includes average cost for local and long distance telephone service for one month.
	Install Minimum Charge	Month	113			113	
Chemical Toilet							
		Month			400	400	Monthly rental of portable toilet.
	Install Minimum Charge	Day			20	20	
Office Trailer							
Place and Remove		Job	495	255		495 255	Includes cost to a contractor to deliver, place and level an office trailer and remove at end of job.
	Install Minimum Charge	Job					
Storage Container							
Place and Remove		Job	284	255		284 255	Includes cost to a contractor to deliver and place a storage container and remove at end of job.
	Install Minimum Charge	Job					
Fencing							
		L.F.	4.80	202		4.80 202	Includes material costs for temporary fencing.
	Install Minimum Charge	Job					
Railing							
		L.F.	22.50	13.85 202	1.09	37.44 202	Includes material and labor to install primed steel pipe.
	Install Minimum Charge	Job					

Equipment Rental		Unit	Material	Labor	Equip.	Total	Specification
Flatbed Truck							
Daily Rental		Day			470	470	Daily rental of flatbed truck.
	Install Minimum Charge	Job			470	470	
Weekly Rental							
		Week			2350	2350	Weekly rental of flatbed truck.
	Install Minimum Charge	Job			470	470	
Monthly Rental							
		Month			9425	9425	Monthly rental of flatbed truck.
	Install Minimum Charge	Job			470	470	
Dump Truck							
Daily Rental		Day			585	585	Daily rental of dump truck.
	Install Minimum Charge	Day			585	585	

Job Costs

Equipment Rental		Unit	Material	Labor	Equip.	Total	Specification
Weekly Rental							
	Install	Week			2925	2925	Weekly rental of dump truck.
	Minimum Charge	Day			585	585	
Monthly Rental							
	Install	Month			11700	11700	Monthly rental of dump truck.
	Minimum Charge	Day			585	585	
Forklift							
Daily Rental							
	Install	Day			465	465	Daily rental of forklift.
	Minimum Charge	Day			465	465	
Weekly Rental							
	Install	Week			2325	2325	Weekly rental of forklift.
	Minimum Charge	Day			465	465	
Monthly Rental							
	Install	Month			9275	9275	Monthly rental of forklift.
	Minimum Charge	Day			465	465	
Bobcat							
Daily Rental							
	Install	Day			300	300	Daily rental of wheeled, skid steer loader.
	Minimum Charge	Day			300	300	
Weekly Rental							
	Install	Week			1500	1500	Weekly rental of wheeled, skid steer loader.
	Minimum Charge	Day			300	300	
Monthly Rental							
	Install	Month			6025	6025	Monthly rental of wheeled, skid steer loader.
	Minimum Charge	Day			300	300	
Air Compressor							
Daily Rental							
	Install	Day			226	226	Daily rental of air compressor.
	Minimum Charge	Day			226	226	
Weekly Rental							
	Install	Week			1125	1125	Weekly rental of air compressor.
	Minimum Charge	Day			226	226	
Monthly Rental							
	Install	Month			4525	4525	Monthly rental of air compressor.
	Minimum Charge	Day			226	226	
Jackhammer							
Daily Rental							
	Install	Day			46	46	Daily rental of air tool, jackhammer.
	Minimum Charge	Day			46	46	
Weekly Rental							
	Install	Week			230	230	Weekly rental of air tool, jackhammer.
	Minimum Charge	Day			46	46	
Monthly Rental							
	Install	Month			920	920	Monthly rental of air tool, jackhammer.
	Minimum Charge	Day			46	46	
Concrete Mixer							
Daily Rental							
	Install	Day			135	135	Daily rental of concrete mixer.
	Minimum Charge	Day			135	135	
Weekly Rental							
	Install	Week			675	675	Weekly rental of concrete mixer.
	Minimum Charge	Day			135	135	

Job Costs

Equipment Rental		Unit	Material	Labor	Equip.	Total	Specification
Monthly Rental	Install	Month			2700	2700	Monthly rental of concrete mixer.
	Minimum Charge	Day			135	135	
Concrete Bucket Daily Rental	Install	Day			50.50	50.50	Daily rental of concrete bucket.
	Minimum Charge	Day			50.50	50.50	
Weekly Rental	Install	Week			253	253	Weekly rental of concrete bucket.
	Minimum Charge	Day			50.50	50.50	
Monthly Rental	Install	Month			1000	1000	Monthly rental of concrete bucket.
	Minimum Charge	Day			50.50	50.50	
Concrete Pump Daily Rental	Install	Day			1000	1000	Daily rental of concrete pump.
	Minimum Charge	Day			1000	1000	
Weekly Rental	Install	Week			5025	5025	Weekly rental of concrete pump.
	Minimum Charge	Day			1000	1000	
Monthly Rental	Install	Month			20100	20100	Monthly rental of concrete pump.
	Minimum Charge	Day			1000	1000	
Generator Daily Rental	Install	Day			78	78	Daily rental of generator.
	Minimum Charge	Day			78	78	
Weekly Rental	Install	Week			390	390	Weekly rental of generator.
	Minimum Charge	Day			78	78	
Monthly Rental	Install	Month			1575	1575	Monthly rental of generator.
	Minimum Charge	Day			78	78	
Welder Daily Rental	Install	Day			66	66	Daily rental of welder.
	Minimum Charge	Day			66	66	
Weekly Rental	Install	Week			330	330	Weekly rental of welder.
	Minimum Charge	Day			66	66	
Monthly Rental	Install	Month			1325	1325	Monthly rental of welder.
	Minimum Charge	Day			66	66	
Sandblaster Daily Rental	Install	Day			139	139	Daily rental of sandblaster.
	Minimum Charge	Day			139	139	
Weekly Rental	Install	Week			695	695	Weekly rental of sandblaster.
	Minimum Charge	Day			139	139	
Monthly Rental	Install	Month			2800	2800	Monthly rental of sandblaster.
	Minimum Charge	Day			139	139	

Job Costs

Equipment Rental		Unit	Material	Labor	Equip.	Total	Specification
Space Heater	Daily Rental						
	Install	Day			83	83	Daily rental of space heater.
	Minimum Charge	Day			50	50	
Weekly Rental	Install	Day			415	415	Weekly rental of space heater.
	Minimum Charge	Day			50	50	
Monthly Rental	Install	Day			1650	1650	Monthly rental of space heater.
	Minimum Charge	Day			50	50	

Move / Reset Contents		Unit	Material	Labor	Equip.	Total	Specification
Small Room	Install	Room		49		49	Includes cost to remove and reset the contents of a small room.
	Minimum Charge	Job		202		202	
Average Room	Install	Room		59.50		59.50	Includes cost to remove and reset the contents of an average room.
	Minimum Charge	Job		202		202	
Large Room	Install	Room		82		82	Includes cost to remove and reset the contents of a large room.
	Minimum Charge	Job		202		202	
Extra Large Room	Install	Room		130		130	Includes cost to remove and reset the contents of an extra large room.
	Minimum Charge	Job		202		202	
Store Contents							
Weekly		Install	Week	375		375	Storage fee, per week.
Monthly		Install	Month	1125		1125	Storage fee, per month.

Cover and Protect		Unit	Material	Labor	Equip.	Total	Specification
Cover / Protect Walls	Install	SF Wall		.16		.16	Includes labor costs to cover and protect walls.
	Minimum Charge	Job		202		202	
Cover / Protect Floors	Install	SF Flr.		.16		.16	Includes labor costs to cover and protect floors.
	Minimum Charge	Job		202		202	

Temporary Bracing		Unit	Material	Labor	Equip.	Total	Specification
Shim Support Piers	Install	Ea.	7.25	159		166.25	Includes labor and material to install shims support for piers.
	Minimum Charge	Job		480		480	

Job Costs

Jack and Relevel		Unit	Material	Labor	Equip.	Total	Specification
Single Story	Install	S.F.	1.93	1.91		3.84	Includes labor and equipment to jack and relevel single-story building.
	Minimum Charge	Job		480		480	
Two-story	Install	S.F.	1.93	3.19		5.12	Includes labor and equipment to jack and relevel two-story building.
	Minimum Charge	Job		480		480	

Dumpster Rental		Unit	Material	Labor	Equip.	Total	Specification
Small Load	Install	Week			750	750	Dumpster, weekly rental, 2 dumps, 5 yard container.
	Minimum Charge	Week			750	750	
Medium Load	Install	Week			855	855	Dumpster, weekly rental, 2 dumps, 10 yard container.
	Minimum Charge	Week			855	855	
Large Load	Install	Week			1325	1325	Dumpster, weekly rental, 2 dumps, 30 yard container.
	Minimum Charge	Week			1325	1325	

Debris Hauling		Unit	Material	Labor	Equip.	Total	Specification
Per Ton	Install	Ton		130	80.50	210.50	Includes hauling of debris by trailer or dump truck.
	Minimum Charge	Ton		975	605	1580	
Per Cubic Yard	Install	C.Y.		43	27	70	Includes hauling of debris by trailer or dump truck.
	Minimum Charge	Job		975	605	1580	
Per Pick-up Truck Load	Install	Ea.		225		225	Includes hauling of debris by pick-up truck.
	Minimum Charge	Ea.		225		225	

Dump Fees		Unit	Material	Labor	Equip.	Total	Specification
Per Cubic Yard	Install	C.Y.	71			71	Dump charges, building materials.
	Minimum Charge	C.Y.	71			71	
Per Ton	Install	Ton	171			171	Dump charges, building materials.
	Minimum Charge	Ton	171			171	

Scaffolding		Unit	Material	Labor	Equip.	Total	Specification
4' to 6' High	Install	Month	193			193	Includes monthly rental of scaffolding, steel tubular, 30" wide, 7' long, 5' high.
	Minimum Charge	Month	193			193	
7' to 11' High	Install	Month	238			238	Includes monthly rental of scaffolding, steel tubular, 30" wide, 7' long, 10' high.
	Minimum Charge	Month	238			238	

Job Costs

Scaffolding		Unit	Material	Labor	Equip.	Total	Specification
12' to 16' High	Install	Month	283			283	Includes monthly rental of scaffolding, steel tubular, 30" wide, 7' long, 15' high.
	Minimum Charge	Month	283			283	
17' to 21' High	Install	Month	395			395	Includes monthly rental of scaffolding, steel tubular, 30" wide, 7' long, 20' high.
	Minimum Charge	Month	395			395	
22' to 26' High	Install	Month	440			440	Includes monthly rental of scaffolding, steel tubular, 30" wide, 7' long, 25' high.
	Minimum Charge	Month	440			440	
27' to 30' High	Install	Month	485			485	Includes monthly rental of scaffolding, steel tubular, 30" wide, 7' long, 30' high.
	Minimum Charge	Month	485			485	

Construction Clean-up		Unit	Material	Labor	Equip.	Total	Specification
Initial	Clean	S.F.		.51		.51	Includes labor for general clean-up.
	Minimum Charge	Job		202		202	
Progressive	Clean	S.F.		.25		.25	Includes labor for progressive site/job clean-up on a weekly basis.
	Minimum Charge	Job		202		202	

Job Preparation



Building Demolition		Unit	Material	Labor	Equip.	Total	Specification
Wood-framed Building							
1 Story Demolition							
	Demolish	S.F.		1.99	2.60	4.59	Includes demolition of 1 floor only light wood-framed building, including hauling of debris. Dump fees not included.
	Minimum Charge	Job		3150	4125	7275	
2nd Story Demolition							
	Demolish	S.F.		2.02	2.65	4.67	Includes demolition of 2nd floor only light wood-framed building, including hauling of debris. Dump fees not included.
	Minimum Charge	Job		3150	4125	7275	
3rd Story Demolition							
	Demolish	S.F.		2.63	3.44	6.07	Includes demolition of 3rd floor only light wood-framed building, including hauling of debris. Dump fees not included.
	Minimum Charge	Job		3150	4125	7275	
Masonry Building							
	Demolish	S.F.		2.83	3.70	6.53	Includes demolition of one story masonry building, including hauling of debris. Dump fees not included.
	Minimum Charge	Job		3150	4125	7275	
Concrete Building							
Unreinforced							
	Demolish	S.F.		5.70	1.79	7.49	Includes demolition of a one story non-reinforced concrete building, including hauling of debris. Dump fees not included.
	Minimum Charge	Job		3150	4125	7275	
Reinforced							
	Demolish	S.F.		6.55	2.05	8.60	Includes demolition of a one story reinforced concrete building, including hauling of debris. Dump fees not included.
	Minimum Charge	Job		3150	4125	7275	
Steel Building							
	Demolish	S.F.		3.77	4.94	8.71	Includes demolition of a metal building, including hauling of debris. Dump fees not included. No salvage value assumed for scrap metal.
	Minimum Charge	Job		3150	4125	7275	

Job Preparation

General Clean-up		Unit	Material	Labor	Equip.	Total	Specification
Remove Debris	Clean Minimum Charge	S.F. Job		1.31 655	.47 236	1.78 891	Includes removal of debris caused by the loss including contents items and loose debris.
Muck-out	Clean Minimum Charge	S.F. Job		.79 202		.79 202	Includes labor to remove 2" of muck and mud after a flood loss.
Deodorize / Disinfect	Clean Minimum Charge	SF Flr. Job	.01	.27 202		.28 202	Includes deodorizing building with application of mildicide and disinfectant to floors and walls - will vary depending on the extent of deodorization required.
Clean Walls Heavy	Clean Minimum Charge	S.F. Job		.18 202		.18 202	Includes labor and material for heavy cleaning (multiple applications) with detergent and solvent.
Clean Ceiling Light	Clean Minimum Charge	S.F. Job		.29 202		.29 202	Includes labor and material to clean light to moderate smoke and soot.
Heavy	Clean Minimum Charge	S.F. Job		.44 202		.44 202	Includes labor and material to clean heavy smoke and soot.

Flood Clean-up		Unit	Material	Labor	Equip.	Total	Specification
Emergency Service Call After Hours / Weekend	Minimum Charge	Job		270		270	Includes minimum charges for deflooding clean-up after hours or on weekends.
Grey Water / Sewage	Minimum Charge	Job		202		202	Includes minimum charges for deflooding clean-up.
Water Extraction Clean (non-grey)	Clean Minimum Charge	S.F. Job	.08	.81 202		.89 202	Includes labor to remove clean uncontaminated water from the loss.
Grey (non-solids)	Clean Minimum Charge	S.F. Job	.15	1.62 202		1.77 202	Includes labor to remove non-solid grey water from the loss.
Sewage / Solids	Clean Minimum Charge	SF Flr. Job	.26	2.02 202		2.28 202	Includes labor to remove water from the loss that may contain sewage or solids.

Job Preparation

Flood Clean-up		Unit	Material	Labor	Equip.	Total	Specification
Mildicide Walls							
Topographical	Clean	SF Wall		.37		.37	Clean-up of deflooding including topographical mildicide application.
	Minimum Charge	Job		202		202	
Injection Treatments							
	Clean	SF Flr.	62.50	6.25		68.75	Clean-up of deflooding including mildicide injection.
	Minimum Charge	Job		202		202	
Carpet Cleaning							
Uncontaminated							
	Clean	SF Flr.		.25		.25	Includes labor to clean carpet.
	Minimum Charge	Job		202		202	
Contaminated							
	Clean	SF Flr.		.40		.40	Includes labor to clean contaminated carpet.
	Minimum Charge	Job		202		202	
Stairway							
	Clean	Ea.	.15	4.76		4.91	Includes labor to clean contaminated carpet on a stairway.
	Minimum Charge	Job		202		202	
Carpet Treatment							
Disinfect / Deodorize							
	Clean	SF Flr.		.25		.25	Includes disinfecting and deodorizing of carpet.
	Minimum Charge	Job		202		202	
Disinfect For Sewage							
	Clean	SF Flr.		.65		.65	Includes labor to disinfect and deodorize carpet exposed to sewage.
	Minimum Charge	Job		202		202	
Mildicide							
	Clean	SF Flr.	.03	.25		.28	Includes labor and materials to apply mildicide to carpet.
	Minimum Charge	Job		202		202	
Thermal Fog Area							
	Clean	SF Flr.	.02	.62		.64	Includes labor and materials to perform thermal fogging during deflooding clean-up.
	Minimum Charge	Job		202		202	
Wet Fog / ULV Area							
	Clean	SF Flr.	.04	.35		.39	Includes labor and materials to perform wet fogging / ULV during deflooding clean-up.
	Minimum Charge	Job		202		202	
Steam Clean Fixtures							
	Clean	Ea.	.02	40.50		40.52	Includes labor and materials to steam clean fixtures during deflooding clean-up.
	Minimum Charge	Job		202		202	
Pressure Wash Sewage							
	Clean	SF Flr.		3.68		3.68	Includes labor to pressure wash sewage contamination.
	Minimum Charge	Job		202		202	
Air Mover							
	Minimum Charge	Day			100	100	Daily rental of air mover.
Dehumidifier							
Medium Size							
	Minimum Charge	Day			55.50	55.50	Daily rental of dehumidifier, medium.
Large Size							
	Minimum Charge	Day			274	274	Daily rental of dehumidifier, large.

Job Preparation

Flood Clean-up		Unit	Material	Labor	Equip.	Total	Specification
Air Purifier							
HEPA Filter-Bacteria	Minimum Charge	Ea.	460			460	HEPA filter for air purifier.
Asbestos Removal		Unit	Material	Labor	Equip.	Total	Specification
Asbestos Analysis							
	Minimum Charge	Job		320		320	Minimum charge for testing.
Asbestos Pipe Insulation							
1/2" to 3/4" Diameter	Demolish	L.F.	.62	8.25		8.87	Minimum charge to remove asbestos. Includes full Tyvek suits for workers changed four times per eight-hour shift with respirators, air monitoring and supervision by qualified professionals.
	Minimum Charge	Job		5100		5100	
1" to 3" Diameter	Demolish	L.F.	1.90	25.50		27.40	Minimum charge to remove asbestos. Includes full Tyvek suits for workers changed four times per eight-hour shift with respirators, air monitoring and supervision by qualified professionals.
	Minimum Charge	Job		5100		5100	
Asbestos-based Siding							
	Demolish	S.F.	4.22	56.50		60.72	Minimum charge to remove asbestos. Includes full Tyvek suits for workers changed four times per eight-hour shift with respirators, air monitoring and supervision by qualified professionals.
	Minimum Charge	Job		5100		5100	
Asbestos-based Plaster							
	Demolish	S.F.	3.25	43.50		46.75	Minimum charge to remove asbestos. Includes full Tyvek suits for workers changed four times per eight-hour shift with respirators, air monitoring and supervision by qualified professionals.
	Minimum Charge	Job		5100		5100	
Encapsulate Asbestos Ceiling							
	Install	S.F.	.66	.24		.90	Includes encapsulation with penetrating sealant sprayed onto ceiling and walls with airless sprayer.
	Minimum Charge	Job		5100		5100	
Scrape Acoustical Ceiling							
	Demolish	S.F.	.12	1.43		1.55	Minimum charge to remove asbestos. Includes full Tyvek suits for workers changed four times per eight-hour shift with respirators, air monitoring and supervision by qualified professionals.
	Minimum Charge	Job		5100		5100	

Job Preparation

Asbestos Removal		Unit	Material	Labor	Equip.	Total	Specification
Seal Ceiling Asbestos	Install	S.F. Job	2.81	4.79		7.60	Includes attaching plastic cover to ceiling area and sealing where asbestos exists, taping all seams, caulk or foam insulation in cracks and negative air system.
	Minimum Charge			5100		5100	
Seal Wall Asbestos	Install	S.F. Job	2.81	4.26		7.07	Includes attaching plastic cover to wall area and sealing where asbestos exists, taping all seams, caulk or foam insulation in cracks and negative air system.
	Minimum Charge			5100		5100	
Seal Floor Asbestos	Install	S.F. Job	4.49	8.50		12.99	Includes attaching plastic cover to floor area and sealing where asbestos exists, taping all seams, caulk or foam insulation in cracks and negative air system.
	Minimum Charge			5100		5100	
Negative Air Vent System	Install	Day Week			130	130	Daily rental of negative air vent system.
	Minimum Charge				650	650	
HEPA Vacuum Cleaner	Install	Day Week			90	90	Daily rental of HEPA vacuum, 16 gallon.
	Minimum Charge				450	450	
Airless Sprayer	Install	Day Week			96.50	96.50	Daily rental of airless sprayer.
	Minimum Charge				485	485	
Decontamination Unit	Install	Day Week			173	173	Daily rental of decontamination unit.
	Minimum Charge				865	865	
Light Stand	Install	Day Week			29	29	Daily rental of floodlight w/tripod.
	Minimum Charge				145	145	

Room Demolition		Unit	Material	Labor	Equip.	Total	Specification
Strip Typical Room	Demolish	S.F. Job		4.05		4.05	Includes 4 labor hours for general demolition.
	Minimum Charge			225		225	
Strip Typical Bathroom	Demolish	S.F. Job		5.40		5.40	Includes 4 labor hours for general demolition.
	Minimum Charge			225		225	
Strip Typical Kitchen	Demolish	S.F. Job		5.20		5.20	Includes 4 labor hours for general demolition.
	Minimum Charge			225		225	
Strip Typical Laundry	Demolish	S.F. Job		4.63		4.63	Includes 4 labor hours for general demolition.
	Minimum Charge			225		225	



Job Preparation

Selective Demolition		Unit	Material	Labor	Equip.	Total	Specification
Concrete Slab							
4" Unreinforced	Demolish	S.F.		.29	.75	1.04	Includes labor and equipment to remove unreinforced concrete slab and haul debris to truck or dumpster.
	Minimum Charge	Job		645	1675	2320	
6" Unreinforced	Demolish	S.F.		.32	.84	1.16	Includes labor and equipment to remove unreinforced concrete slab and haul debris to truck or dumpster.
	Minimum Charge	Job		645	1675	2320	
8" Unreinforced	Demolish	S.F.		.37	.96	1.33	Includes labor and equipment to remove unreinforced concrete slab and haul debris to truck or dumpster.
	Minimum Charge	Job		645	1675	2320	
4" Reinforced	Demolish	S.F.		.29	.75	1.04	Includes labor and equipment to remove reinforced concrete slab and haul debris to truck or dumpster.
	Minimum Charge	Job		645	1675	2320	
6" Reinforced	Demolish	S.F.		.32	.84	1.16	Includes labor and equipment to remove reinforced concrete slab and haul debris to truck or dumpster.
	Minimum Charge	Job		645	1675	2320	
8" Reinforced	Demolish	S.F.		.37	.96	1.33	Includes labor and equipment to remove reinforced concrete slab and haul debris to truck or dumpster.
	Minimum Charge	Job		645	1675	2320	
Brick Wall							
4" Thick	Demolish	S.F.		3.73	.74	4.47	Includes labor and equipment to remove brick wall and haul debris to a central location for disposal.
	Minimum Charge	Job		1150	225	1375	
8" Thick	Demolish	S.F.		5.10	1.01	6.11	Includes labor and equipment to remove brick wall and haul debris to a central location for disposal.
	Minimum Charge	Job		1150	225	1375	
12" Thick	Demolish	S.F.		6.85	1.35	8.20	Includes labor and equipment to remove brick wall and haul debris to a central location for disposal.
	Minimum Charge	Job		1150	225	1375	
Concrete Masonry Wall							
4" Thick	Demolish	S.F.		4.14	.82	4.96	Includes minimum labor and equipment to remove 4" block wall and haul debris to a central location for disposal.
	Minimum Charge	Job		1150	225	1375	
6" Thick	Demolish	S.F.		5.10	1.01	6.11	Includes minimum labor and equipment to remove 6" block wall and haul debris to a central location for disposal.
	Minimum Charge	Job		1150	225	1375	

Job Preparation

Selective Demolition		Unit	Material	Labor	Equip.	Total	Specification
8" Thick	Demolish	S.F.		6.30	1.25	7.55	Includes minimum labor and equipment to remove 8" block wall and haul debris to a central location for disposal.
	Minimum Charge	Job		1150	225	1375	
12" Thick	Demolish	S.F.		9.10	1.80	10.90	Includes minimum labor and equipment to remove 12" block wall and haul debris to a central location for disposal.
	Minimum Charge	Job		1150	225	1375	
Tree Removal							
Small, 4" - 8"	Demolish	Ea.		146	125	271	Minimum charge, common labor trade.
	Minimum Charge	Job		202		202	
Medium, 9" - 12"	Demolish	Ea.		218	187	405	Minimum charge, common labor trade.
	Minimum Charge	Job		202		202	
Large, 13" - 18"	Demolish	Ea.		262	225	487	Minimum charge, tree removal.
	Minimum Charge	Job		675	191	866	
Very Large, 19" - 24"	Demolish	Ea.		325	281	606	Minimum charge, tree removal.
	Minimum Charge	Job		675	191	866	
Stump Removal	Demolish	Ea.		99.50	215	314.50	Includes minimum charges for a site demolition crew and backhoe / loader.
	Minimum Charge	Job		375	91.50	466.50	

Excavation

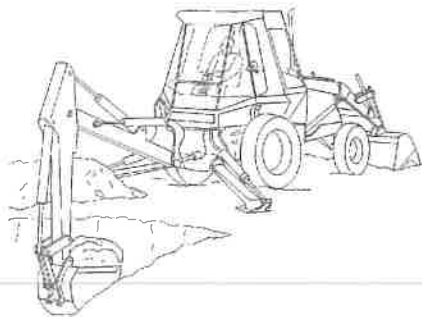



Backhoe/Loader - Wheel Type

Tractor Loader - Wheel Type

Backhoe - Crawler Type

Excavation		Unit	Material	Labor	Equip.	Total	Specification
Footings							
Hand Trenching							
	Install	L.F.		2.53		2.53	Includes hand excavation for footing or trench up to 10" deep and 12" wide.
	Minimum Charge	Job		101		101	
Machine Trenching							
	Install	L.F.		.97	.33	1.30	Includes machine excavation for footing or trench up to 10" deep and 12" wide.
	Minimum Charge	Job		485	165	650	
Trenching w / Backfill							
Hand							
	Install	L.F.		4.05		4.05	Includes hand excavation, backfill and compaction.
	Minimum Charge	Job		101		101	
Machine							
	Install	L.F.		4.87	12.65	17.52	Includes machine excavation, backfill and compaction.
	Minimum Charge	Job		202	115	317	

Backfill		Unit	Material	Labor	Equip.	Total	Specification
Hand (no compaction)							
	Install	L.C.Y.		33.50		33.50	Includes backfill by hand in average soil without compaction.
	Minimum Charge	Job		202		202	
Hand (w / compaction)							
	Install	B.C.Y.		47.50		47.50	Includes backfill by hand in average soil with compaction.
	Minimum Charge	Job		202		202	
Machine (no compaction)							
	Install	L.C.Y.		4.87	1.65	6.52	Includes backfill, by 55 HP wheel loader, of trenches from loose material piled adjacent without compaction.
	Minimum Charge	Job		485	165	650	
Machine (w / compaction)							
	Install	L.C.Y.		13	4.39	17.39	Includes backfill, by 55 HP wheel loader, of trenches from loose material piled adjacent with compaction by vibrating tampers.
	Minimum Charge	Job		485	165	650	



Concrete Footing and Formwork

Wood Pile

Piles		Unit	Material	Labor	Equip.	Total	Specification
Treated Wood, 12" Butt							
To 30'							
	Demolish	L.F.		6.55	1.59	8.14	Includes material, labor and equipment to install up to 30' long treated wood piling.
	Install	V.L.F.	21	6.15	4.39	31.54	
	Demolish and Install	V.L.F.	21	12.70	5.98	39.68	
	Paint	L.F.	.59	2.52		3.11	
	Minimum Charge	Job		3850	2750	6600	
30' to 40'							
	Demolish	L.F.		6.55	1.59	8.14	Includes material, labor and equipment to install 30' to 40' long treated wood piling.
	Install	V.L.F.	29	5.50	3.92	38.42	
	Demolish and Install	V.L.F.	29	12.05	5.51	46.56	
	Paint	L.F.	.59	2.52		3.11	
	Minimum Charge	Job		3850	2750	6600	
40' to 50'							
	Demolish	L.F.		6.55	1.59	8.14	Includes material, labor and equipment to install 40' to 50' long treated wood piling.
	Install	V.L.F.	31.50	5.35	3.81	40.66	
	Demolish and Install	V.L.F.	31.50	11.90	5.40	48.80	
	Paint	L.F.	.59	2.52		3.11	
	Minimum Charge	Job		3850	2750	6600	
50' to 60'							
	Demolish	L.F.		6.55	1.59	8.14	Includes material, labor and equipment to install 50' to 60' long treated wood piling.
	Install	V.L.F.	32.50	4.81	3.43	40.74	
	Demolish and Install	V.L.F.	32.50	11.36	5.02	48.88	
	Paint	L.F.	.59	2.52		3.11	
	Minimum Charge	Job		3850	2750	6600	
60' to 80'							
	Demolish	L.F.		6.55	1.59	8.14	Includes material, labor and equipment to install 60' to 80' long treated wood piling.
	Install	V.L.F.	39	4.59	4.68	48.27	
	Demolish and Install	V.L.F.	39	11.14	6.27	56.41	
	Paint	L.F.	.59	2.52		3.11	
	Minimum Charge	Job		3850	2750	6600	
Untreated Wood, 12" Butt							
To 30'							
	Demolish	L.F.		6.55	1.59	8.14	Includes material, labor and equipment to install up to 30' long untreated wood piling.
	Install	V.L.F.	17.75	6.15	4.39	28.29	
	Demolish and Install	V.L.F.	17.75	12.70	5.98	36.43	
	Paint	L.F.	.59	2.52		3.11	
	Minimum Charge	Job		3850	2750	6600	

Foundation

Piles		Unit	Material	Labor	Equip.	Total	Specification
30' to 40'							
	Demolish	L.F.		6.55	1.59	8.14	Includes material, labor and equipment to install 30' to 40' long untreated wood piling.
	Install	V.L.F.	18.75	5.50	3.92	28.17	
	Demolish and Install	V.L.F.	18.75	12.05	5.51	36.31	
	Paint	L.F.	.59	2.52		3.11	
	Minimum Charge	Job		3850	2750	6600	
40' to 50'							
	Demolish	L.F.		6.55	1.59	8.14	Includes material, labor and equipment to install 40' to 50' long untreated wood piling.
	Install	V.L.F.	19.75	5.35	3.81	28.91	
	Demolish and Install	V.L.F.	19.75	11.90	5.40	37.05	
	Paint	L.F.	.59	2.52		3.11	
	Minimum Charge	Job		3850	2750	6600	
50' to 60'							
	Demolish	L.F.		6.55	1.59	8.14	Includes material, labor and equipment to install 50' to 60' long untreated wood piling.
	Install	V.L.F.	28	4.81	3.43	36.24	
	Demolish and Install	V.L.F.	28	11.36	5.02	44.38	
	Paint	L.F.	.59	2.52		3.11	
	Minimum Charge	Job		3850	2750	6600	
60' to 80'							
	Demolish	L.F.		6.55	1.59	8.14	Includes material, labor and equipment to install 60' to 80' long untreated wood piling.
	Install	V.L.F.	32	4.59	3.27	39.86	
	Demolish and Install	V.L.F.	32	11.14	4.86	48	
	Paint	L.F.	.59	2.52		3.11	
	Minimum Charge	Job		3850	2750	6600	
Precast Concrete							
10" Square							
	Demolish	L.F.		6.70	1.63	8.33	Includes material, labor and equipment to install a precast, prestressed, 40' long, 10" square concrete pile.
	Install	V.L.F.	17.15	5.50	3.92	26.57	
	Demolish and Install	V.L.F.	17.15	12.20	5.55	34.90	
	Paint	L.F.	.59	2.52		3.11	
	Minimum Charge	Job		3850	2750	6600	
12" Square							
	Demolish	L.F.		7.15	1.74	8.89	Includes material, labor and equipment to install a precast, prestressed, 40' long, 12" square concrete pile.
	Install	V.L.F.	30.50	5.65	4.04	40.19	
	Demolish and Install	V.L.F.	30.50	12.80	5.78	49.08	
	Paint	L.F.	.59	2.52		3.11	
	Minimum Charge	Job		3850	2750	6600	
14" Square							
	Demolish	L.F.		7.35	1.78	9.13	Includes material, labor and equipment to install a precast, prestressed, 40' long, 14" square concrete pile.
	Install	V.L.F.	34.50	6.40	4.58	45.48	
	Demolish and Install	V.L.F.	34.50	13.75	6.36	54.61	
	Paint	L.F.	.59	2.52		3.11	
	Minimum Charge	Job		3850	2750	6600	
16" Square							
	Demolish	L.F.		7.70	1.88	9.58	Includes material, labor and equipment to install a precast, prestressed, 40' long, 16" square concrete pile.
	Install	V.L.F.	36.50	6.90	4.90	48.30	
	Demolish and Install	V.L.F.	36.50	14.60	6.78	57.88	
	Paint	L.F.	.59	2.52		3.11	
	Minimum Charge	Job		3850	2750	6600	
18" Square							
	Demolish	L.F.		8.35	2.03	10.38	Includes material, labor and equipment to install a precast, prestressed, 40' long, 18" square concrete pile.
	Install	V.L.F.	62.50	7.40	7.55	77.45	
	Demolish and Install	V.L.F.	62.50	15.75	9.58	87.83	
	Paint	L.F.	.59	2.52		3.11	
	Minimum Charge	Job		3850	2750	6600	

Foundation

Piles		Unit	Material	Labor	Equip.	Total	Specification
Cross Bracing							
Treated 2" x 6"							
	Demolish	L.F.		1.32		1.32	Cost includes material and labor to install 2" x 6" lumber for cross-bracing of foundation piling or posts.
	Install	L.F.	1.30	7.70		9	
	Demolish and Install	L.F.	1.30	9.02		10.32	
	Reinstall	L.F.		6.17		6.17	
	Clean	S.F.		.51		.51	
	Paint	L.F.	.41	1.70		2.11	
	Minimum Charge	Job		955		955	
Treated 2" x 8"							
	Demolish	L.F.		1.32		1.32	Cost includes material and labor to install 2" x 8" lumber for cross-bracing of foundation piling or posts.
	Install	L.F.	1.61	7.95		9.56	
	Demolish and Install	L.F.	1.61	9.27		10.88	
	Reinstall	L.F.		6.38		6.38	
	Clean	S.F.		.51		.51	
	Paint	L.F.	.53	1.76		2.29	
	Minimum Charge	Job		955		955	
Treated 2" x 10"							
	Demolish	L.F.		1.36		1.36	Cost includes material and labor to install 2" x 10" lumber for cross-bracing of foundation piling or posts.
	Install	L.F.	2.26	8.25		10.51	
	Demolish and Install	L.F.	2.26	9.61		11.87	
	Reinstall	L.F.		6.60		6.60	
	Clean	S.F.		.51		.51	
	Paint	L.F.	.65	1.80		2.45	
	Minimum Charge	Job		955		955	
Treated 2" x 12"							
	Demolish	L.F.		1.64		1.64	Cost includes material and labor to install 2" x 12" lumber for cross-bracing of foundation piling or posts.
	Install	L.F.	3.36	8.55		11.91	
	Demolish and Install	L.F.	3.36	10.19		13.55	
	Reinstall	L.F.		6.83		6.83	
	Clean	S.F.		.51		.51	
	Paint	L.F.	.76	1.84		2.60	
	Minimum Charge	Job		955		955	
Metal Pipe							
6" Concrete Filled							
	Demolish	L.F.		9.30	2.26	11.56	Includes material, labor and equipment to install concrete filled steel pipe pile.
	Install	V.L.F.	26	8	5.70	39.70	
	Demolish and Install	V.L.F.	26	17.30	7.96	51.26	
	Paint	L.F.	.29	2.52		2.81	
	Minimum Charge	Job		3850	2750	6600	
6" Unfilled							
	Demolish	L.F.		9.30	2.26	11.56	Includes material, labor and equipment to install unfilled steel pipe pile.
	Install	V.L.F.	22	7.35	5.25	34.60	
	Demolish and Install	V.L.F.	22	16.65	7.51	46.16	
	Paint	L.F.	.29	2.52		2.81	
	Minimum Charge	Job		3850	2750	6600	
8" Concrete Filled							
	Demolish	L.F.		9.30	2.26	11.56	Includes material, labor and equipment to install concrete filled steel pipe pile.
	Install	V.L.F.	29	8.35	5.95	43.30	
	Demolish and Install	V.L.F.	29	17.65	8.21	54.86	
	Paint	L.F.	.29	2.52		2.81	
	Minimum Charge	Job		3850	2750	6600	
8" Unfilled							
	Demolish	L.F.		9.30	2.26	11.56	Includes material, labor and equipment to install unfilled steel pipe pile.
	Install	V.L.F.	23	7.70	5.50	36.20	
	Demolish and Install	V.L.F.	23	17	7.76	47.76	
	Paint	L.F.	.29	2.52		2.81	
	Minimum Charge	Job		3850	2750	6600	

Foundation

Piles		Unit	Material	Labor	Equip.	Total	Specification
10" Concrete Filled							
	Demolish	L.F.		9.55	2.33	11.88	Includes material, labor and equipment to install concrete filled steel pipe pile.
	Install	V.L.F.	63.50	8.55	6.10	78.15	
	Demolish and Install	V.L.F.	63.50	18.10	8.43	90.03	
	Paint	L.F.	.29	2.52		2.81	
	Minimum Charge	Job		3850	2750	6600	
10" Unfilled							
	Demolish	L.F.		9.55	2.33	11.88	Includes material, labor and equipment to install unfilled steel pipe pile.
	Install	V.L.F.	51.50	7.70	5.50	64.70	
	Demolish and Install	V.L.F.	51.50	17.25	7.83	76.58	
	Paint	L.F.	.29	2.52		2.81	
	Minimum Charge	Job		3850	2750	6600	
12" Concrete Filled							
	Demolish	L.F.		9.55	2.33	11.88	Includes material, labor and equipment to install concrete filled steel pipe pile.
	Install	V.L.F.	43	9.30	6.60	58.90	
	Demolish and Install	V.L.F.	43	18.85	8.93	70.78	
	Paint	L.F.	.29	2.52		2.81	
	Minimum Charge	Job		3850	2750	6600	
12" Unfilled							
	Demolish	L.F.		9.55	2.33	11.88	Includes material, labor and equipment to install unfilled steel pipe pile.
	Install	V.L.F.	43	8.10	5.80	56.90	
	Demolish and Install	V.L.F.	43	17.65	8.13	68.78	
	Paint	L.F.	.29	2.52		2.81	
	Minimum Charge	Job		3850	2750	6600	
Steel H Section							
H Section 8 x 8 x 36#							
	Demolish	L.F.		6.50	1.58	8.08	Includes material, labor and equipment to install steel H section pile.
	Install	V.L.F.	21	6	4.29	31.29	
	Demolish and Install	V.L.F.	21	12.50	5.87	39.37	
	Paint	S.F.	.33	.36		.69	
	Minimum Charge	Job		3850	2750	6600	
H Section 10 x 10 x 57#							
	Demolish	L.F.		7.10	1.73	8.83	Includes material, labor and equipment to install steel H section pile.
	Install	V.L.F.	32	6.30	4.50	42.80	
	Demolish and Install	V.L.F.	32	13.40	6.23	51.63	
	Paint	S.F.	.33	.36		.69	
	Minimum Charge	Job		3850	2750	6600	
H Section 12 x 12 x 74#							
	Demolish	L.F.		7.35	1.78	9.13	Includes material, labor and equipment to install steel H section pile.
	Install	V.L.F.	40.50	6.55	6.65	53.70	
	Demolish and Install	V.L.F.	40.50	13.90	8.43	62.83	
	Paint	S.F.	.33	.36		.69	
	Minimum Charge	Job		3850	2750	6600	
H Section 14 x 14 x 89#							
	Demolish	L.F.		7.70	1.88	9.58	Includes material, labor and equipment to install steel H section pile.
	Install	V.L.F.	55	7.15	7.30	69.45	
	Demolish and Install	V.L.F.	55	14.85	9.18	79.03	
	Paint	S.F.	.33	.36		.69	
	Minimum Charge	Job		3850	2750	6600	

Foundation

Foundation Post		Unit	Material	Labor	Equip.	Total	Specification
Wood Foundation Post							
4" x 4"							
	Demolish	L.F.		1.05	.26	1.31	Cost includes material and labor to install 4" x 4" treated wood post by hand in normal soil conditions.
	Install	L.F.	1.79	6.75		8.54	
	Demolish and Install	L.F.	1.79	7.80	.26	9.85	
	Reinstall	L.F.		5.40		5.40	
	Minimum Charge	Job		955		955	
4" x 6"							
	Demolish	L.F.		1.05	.26	1.31	Cost includes material and labor to install 4" x 6" treated wood post by hand in normal soil conditions.
	Install	L.F.	2.71	6.75		9.46	
	Demolish and Install	L.F.	2.71	7.80	.26	10.77	
	Reinstall	L.F.		5.40		5.40	
	Minimum Charge	Job		955		955	
6" x 6"							
	Demolish	L.F.		1.05	.26	1.31	Cost includes material and labor to install 6" x 6" treated wood post by hand in normal soil conditions.
	Install	L.F.	4.28	6.75		11.03	
	Demolish and Install	L.F.	4.28	7.80	.26	12.34	
	Reinstall	L.F.		5.40		5.40	
	Minimum Charge	Job		955		955	
Water Jet							
	Demolish	Ea.		120		120	Includes material, labor and equipment to water jet a 6" x 6" wood post under an existing building. Cost may vary depending upon location and access.
	Install	Ea.	89.50	925		1014.50	
	Demolish and Install	Ea.	89.50	1045		1134.50	
	Reinstall	Ea.		925.26		925.26	
	Minimum Charge	Job		810		810	
Shim							
	Install	Ea.	1.69	95.50		97.19	Includes labor and material to trim or readjust existing foundation posts under an existing building. Access of 2 - 4 foot assumed.
	Minimum Charge	Job		955		955	
Cross-bracing							
Treated 2" x 6"							
	Demolish	L.F.		1.32		1.32	Cost includes material and labor to install 2" x 6" lumber for cross-bracing of foundation piling or posts.
	Install	L.F.	1.30	7.70		9	
	Demolish and Install	L.F.	1.30	9.02		10.32	
	Reinstall	L.F.		6.17		6.17	
	Clean	S.F.		.51		.51	
	Paint	L.F.	.41	1.70		2.11	
	Minimum Charge	Job		955		955	
Treated 2" x 8"							
	Demolish	L.F.		1.32		1.32	Cost includes material and labor to install 2" x 8" lumber for cross-bracing of foundation piling or posts.
	Install	L.F.	1.61	7.95		9.56	
	Demolish and Install	L.F.	1.61	9.27		10.88	
	Reinstall	L.F.		6.38		6.38	
	Clean	S.F.		.51		.51	
	Paint	L.F.	.53	1.76		2.29	
	Minimum Charge	Job		955		955	
Treated 2" x 10"							
	Demolish	L.F.		1.36		1.36	Cost includes material and labor to install 2" x 10" lumber for cross-bracing of foundation piling or posts.
	Install	L.F.	2.26	8.25		10.51	
	Demolish and Install	L.F.	2.26	9.61		11.87	
	Reinstall	L.F.		6.60		6.60	
	Clean	S.F.		.51		.51	
	Paint	L.F.	.65	1.80		2.45	
	Minimum Charge	Job		955		955	

Foundation




Foundation Post		Unit	Material	Labor	Equip.	Total	Specification
Treated 2" x 12"							
	Demolish	L.F.		1.64		1.64	Cost includes material and labor to install 2" x 12" lumber for cross-bracing of foundation piling or posts.
	Install	L.F.	3.36	8.55		11.91	
	Demolish and Install	L.F.	3.36	10.19		13.55	
	Reinstall	L.F.		6.83		6.83	
	Clean	S.F.		.51		.51	
	Paint	L.F.	.76	1.84		2.60	
	Minimum Charge	Job		955		955	
Concrete Footing		Unit	Material	Labor	Equip.	Total	Specification
Continuous							
12" w x 6" d							
	Demolish	L.F.		.72	1.87	2.59	Includes material and labor to install continuous reinforced concrete footing poured by chute cast against earth including reinforcing, forming and finishing.
	Install	L.F.	8.05	4.11	.05	12.21	
	Demolish and Install	L.F.	8.05	4.83	1.92	14.80	
	Minimum Charge	Job		1075		1075	
12" w x 12" d							
	Demolish	L.F.		.86	2.25	3.11	Includes material and labor to install continuous reinforced concrete footing poured by chute cast against earth including reinforcing, forming and finishing.
	Install	L.F.	16.80	8.30	.10	25.20	
	Demolish and Install	L.F.	16.80	9.16	2.35	28.31	
	Minimum Charge	Job		1075		1075	
18" w x 10" d							
	Demolish	L.F.		.86	2.25	3.11	Includes material and labor to install continuous reinforced concrete footing poured by chute cast against earth including reinforcing, forming and finishing.
	Install	L.F.	15.75	10.55	.12	26.42	
	Demolish and Install	L.F.	15.75	11.41	2.37	29.53	
	Minimum Charge	Job		1075		1075	
24" w x 24" d							
	Demolish	L.F.		1.29	3.37	4.66	Includes material and labor to install continuous reinforced concrete footing poured by chute cast against earth including reinforcing, forming and finishing.
	Install	L.F.	47	31.50	.36	78.86	
	Demolish and Install	L.F.	47	32.79	3.73	83.52	
	Minimum Charge	Job		1075		1075	
Stem Wall							
Single Story							
	Demolish	L.F.		18.25	15.95	34.20	Includes material and labor to install stem wall 24" above and 18" below grade for a single story structure. Includes 12" wide and 8" deep footing.
	Install	L.F.	39.50	137	1.59	178.09	
	Demolish and Install	L.F.	39.50	155.25	17.54	212.29	
	Minimum Charge	Job		1075		1075	
Two Story							
	Demolish	L.F.		18.25	15.95	34.20	Includes material and labor to install stem wall 24" above and 18" below grade typical for a two story structure, includes 18" wide and 10" deep footing.
	Install	L.F.	48.50	198	2.28	248.78	
	Demolish and Install	L.F.	48.50	216.25	18.23	282.98	
	Minimum Charge	Job		1075		1075	

Foundation

Concrete Slab		Unit	Material	Labor	Equip.	Total	Specification
Reinforced							
4"							
	Demolish	S.F.		.29	.75	1.04	Cost includes material and labor to install 4" reinforced concrete slab-on-grade poured by chute including forms, vapor barrier, wire mesh, 3000 PSI concrete, float finish, and curing.
	Install	S.F.	3.85	.53		4.38	
	Demolish and Install	S.F.	3.85	.82	.75	5.42	
	Clean	S.F.	.14	.45		.59	
	Paint	S.F.	.20	1		1.20	
	Minimum Charge	Job		266		266	
6"							
	Demolish	S.F.		.32	.84	1.16	Cost includes material and labor to install 6" reinforced concrete slab-on-grade poured by chute including forms, vapor barrier, wire mesh, 3000 PSI concrete, float finish, and curing.
	Install	S.F.	5.25	.81	.01	6.07	
	Demolish and Install	S.F.	5.25	1.13	.85	7.23	
	Clean	S.F.	.14	.45		.59	
	Paint	S.F.	.20	1		1.20	
	Minimum Charge	Job		266		266	
8"							
	Demolish	S.F.		.37	.96	1.33	Cost includes material and labor to install 8" reinforced concrete slab-on-grade poured by chute including forms, vapor barrier, wire mesh, 3000 PSI concrete, float finish, and curing.
	Install	S.F.	6.75	1.06	.01	7.82	
	Demolish and Install	S.F.	6.75	1.43	.97	9.15	
	Clean	S.F.	.14	.45		.59	
	Paint	S.F.	.20	1		1.20	
	Minimum Charge	Job		266		266	
Unreinforced							
4"							
	Demolish	S.F.		.29	.75	1.04	Cost includes material and labor to install 4" concrete slab-on-grade poured by chute, including forms, vapor barrier, 3000 PSI concrete, float finish, and curing.
	Install	S.F.	2.70	1.29	.01	4	
	Demolish and Install	S.F.	2.70	1.58	.76	5.04	
	Clean	S.F.	.14	.45		.59	
	Paint	S.F.	.20	1		1.20	
	Minimum Charge	Job		266		266	
6"							
	Demolish	S.F.		.32	.84	1.16	Cost includes material and labor to install 6" concrete slab-on-grade poured by chute, including forms, vapor barrier, 3000 PSI concrete, float finish, and curing.
	Install	S.F.	3.94	1.32	.01	5.27	
	Demolish and Install	S.F.	3.94	1.64	.85	6.43	
	Clean	S.F.	.14	.45		.59	
	Paint	S.F.	.20	1		1.20	
	Minimum Charge	Job		266		266	
8"							
	Demolish	S.F.		.37	.96	1.33	Cost includes material and labor to install 8" concrete slab-on-grade poured by chute, including forms, vapor barrier, 3000 PSI concrete, float finish, and curing.
	Install	S.F.	5.40	1.39	.01	6.80	
	Demolish and Install	S.F.	5.40	1.76	.97	8.13	
	Clean	S.F.	.14	.45		.59	
	Paint	S.F.	.20	1		1.20	
	Minimum Charge	Job		266		266	
Lightweight							
	Demolish	S.F.		1.20	.49	1.69	Includes material and labor to install lightweight concrete, 3" - 4" thick.
	Install	S.F.	2.78	3.92		6.70	
	Demolish and Install	S.F.	2.78	5.12	.49	8.39	
	Clean	S.F.	.14	.45		.59	
	Paint	S.F.	.20	1		1.20	
	Minimum Charge	Job		266		266	

Foundation

Concrete Slab		Unit	Material	Labor	Equip.	Total	Specification
Gunite							
	Demolish	S.F.		1.50	.37	1.87	Includes material and labor to install gunite on flat plane per inch of thickness using 1" as base price. No forms or reinforcing are included.
	Install	S.F.	.61	1.64	.26	2.51	
	Demolish and Install	S.F.	.61	3.14	.63	4.38	
	Clean	S.F.	.14	.45		.59	
	Paint	S.F.	.20	1		1.20	
	Minimum Charge	Job		1475		1475	
Epoxy Inject							
	Install	L.F.	4	8.85		12.85	Includes labor and material to inject epoxy into cracks.
	Minimum Charge	Job		266		266	
Slabjacking							
	Install	S.F.	1.10	1.53	.16	2.79	Includes labor, material and equipment to install slabjacking under an existing building.
	Minimum Charge	Job		266		266	
Scrape and Paint							
	Paint	S.F.	.68	1.10		1.78	Includes labor and materials to scrape and paint a concrete floor.
	Minimum Charge	Job		220		220	
Vapor Barrier							
	Install	S.F.	.08	.15		.23	Cost includes material and labor to install 4 mil polyethylene vapor barrier 10' wide sheets with 6" overlaps.
	Minimum Charge	Job		269		269	



Rough Framing

Beam / Girder		Unit	Material	Labor	Equip.	Total	Specification
Solid Wood Beam							
2" x 8"							
	Demolish	L.F.		1.09		1.09	Cost includes material and labor to install 2" x 8" beam.
	Install	L.F.	1.53	1.65		3.18	
	Demolish and Install	L.F.	1.53	2.74		4.27	
	Clean	L.F.	.11	.36		.47	
	Paint	L.F.	.32	2.38		2.70	
	Minimum Charge	Job		269		269	
2" x 10"							
	Demolish	L.F.		1.35		1.35	Cost includes material and labor to install 2" x 10" beam.
	Install	L.F.	2.08	1.79		3.87	
	Demolish and Install	L.F.	2.08	3.14		5.22	
	Clean	L.F.	.13	.43		.56	
	Paint	L.F.	.26	1.47		1.73	
	Minimum Charge	Job		269		269	
2" x 12"							
	Demolish	L.F.		1.64		1.64	Cost includes material and labor to install 2" x 12" beam.
	Install	L.F.	2.94	1.95		4.89	
	Demolish and Install	L.F.	2.94	3.59		6.53	
	Clean	L.F.	.15	.51		.66	
	Paint	L.F.	.47	3.53		4	
	Minimum Charge	Job		269		269	
4" x 8"							
	Demolish	L.F.		3.34		3.34	Cost includes material and labor to install 4" x 8" beam.
	Install	L.F.	12.70	2.50	2.60	17.80	
	Demolish and Install	L.F.	12.70	5.84	2.60	21.14	
	Clean	L.F.	.13	.43		.56	
	Paint	L.F.	.26	1.47		1.73	
	Minimum Charge	Job		269		269	
4" x 10"							
	Demolish	L.F.		4.18		4.18	Cost includes material and labor to install 4" x 10" beam.
	Install	L.F.	8.70	2.63	2.73	14.06	
	Demolish and Install	L.F.	8.70	6.81	2.73	18.24	
	Clean	L.F.	.15	.51		.66	
	Paint	L.F.	.30	1.72		2.02	
	Minimum Charge	Job		269		269	
4" x 12"							
	Demolish	L.F.		5		5	Cost includes material and labor to install 4" x 12" beam.
	Install	L.F.	12.30	2.77	2.88	17.95	
	Demolish and Install	L.F.	12.30	7.77	2.88	22.95	
	Clean	L.F.	.18	.58		.76	
	Paint	L.F.	.47	3.53		4	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Beam / Girder		Unit	Material	Labor	Equip.	Total	Specification
6" x 8"	Demolish	L.F.		5		5	Cost includes material and labor to install 6" x 8" beam.
	Install	L.F.	12.95	4.75	4.94	22.64	
	Demolish and Install	L.F.	12.95	9.75	4.94	27.64	
	Clean	L.F.	.15	.51		.66	
	Paint	L.F.	.30	1.71		2.01	
	Minimum Charge	Job		269		269	
6" x 10"	Demolish	L.F.		6.25		6.25	Cost includes material and labor to install 6" x 10" triple beam.
	Install	L.F.	6.20	2.15		8.35	
	Demolish and Install	L.F.	6.20	8.40		14.60	
	Clean	L.F.	.18	.58		.76	
	Paint	L.F.	.34	1.96		2.30	
	Minimum Charge	Job		269		269	
6" x 12"	Demolish	L.F.		7.45		7.45	Cost Includes material and labor to install 6" x 12" triple beam.
	Install	L.F.	8.80	2.26		11.06	
	Demolish and Install	L.F.	8.80	9.71		18.51	
	Clean	L.F.	.19	.65		.84	
	Paint	L.F.	.39	2.20		2.59	
	Minimum Charge	Job		269		269	
Steel I-type							
W8 x 31	Demolish	L.F.		11.70	11.95	23.65	Includes material and labor to install W shaped steel beam / girder.
	Install	L.F.	53.50	3.36	3.02	59.88	
	Demolish and Install	L.F.	53.50	15.06	14.97	83.53	
	Minimum Charge	Job		605		605	
W8 x 48	Demolish	L.F.		11.70	11.95	23.65	Includes material and labor to install W shaped steel beam / girder.
	Install	L.F.	82.50	3.51	3.16	89.17	
	Demolish and Install	L.F.	82.50	15.21	15.11	112.82	
	Minimum Charge	Job		605		605	
W8 x 67	Demolish	L.F.		11.70	11.95	23.65	Includes material and labor to install W shaped steel beam / girder.
	Install	L.F.	116	3.68	3.31	122.99	
	Demolish and Install	L.F.	116	15.38	15.26	146.64	
	Minimum Charge	Job		605		605	
W10 x 45	Demolish	L.F.		11.70	11.95	23.65	Includes material and labor to install W shaped steel beam / girder.
	Install	L.F.	77.50	3.51	3.16	84.17	
	Demolish and Install	L.F.	77.50	15.21	15.11	107.82	
	Minimum Charge	Job		605		605	
W10 x 68	Demolish	L.F.		11.70	11.95	23.65	Includes material and labor to install W shaped steel beam / girder.
	Install	L.F.	117	3.68	3.31	123.99	
	Demolish and Install	L.F.	117	15.38	15.26	147.64	
	Minimum Charge	Job		605		605	
W12 x 50	Demolish	L.F.		11.70	11.95	23.65	Includes material and labor to install W shaped steel beam / girder.
	Install	L.F.	86	3.51	3.16	92.67	
	Demolish and Install	L.F.	86	15.21	15.11	116.32	
	Minimum Charge	Job		605		605	
W12 x 87	Demolish	L.F.		17.20	17.60	34.80	Includes material and labor to install W shaped steel beam / girder.
	Install	L.F.	150	3.68	3.31	156.99	
	Demolish and Install	L.F.	150	20.88	20.91	191.79	
	Minimum Charge	Job		605		605	

Rough Frame / Structure

Beam / Girder		Unit	Material	Labor	Equip.	Total	Specification
W12 x 120	Demolish	L.F.		17.20	17.60	34.80	Includes material and labor to install W shaped steel beam / girder.
	Install	L.F.	207	3.78	3.39	214.17	
	Demolish and Install	L.F.	207	20.98	20.99	248.97	
	Minimum Charge	Job		605		605	
W14 x 74	Demolish	L.F.		17.20	17.60	34.80	Includes material and labor to install W shaped steel beam / girder.
	Install	L.F.	128	3.68	3.31	134.99	
	Demolish and Install	L.F.	128	20.88	20.91	169.79	
	Minimum Charge	Job		605		605	
W14 x 120	Demolish	L.F.		17.20	17.60	34.80	Includes material and labor to install W shaped steel beam / girder.
	Install	L.F.	207	3.78	3.39	214.17	
	Demolish and Install	L.F.	207	20.98	20.99	248.97	
	Minimum Charge	Job		605		605	

Column		Unit	Material	Labor	Equip.	Total	Specification
Concrete Small Diameter	Demolish	L.F.		19	3.75	22.75	Includes material and labor to install small diameter concrete column.
	Install	V.L.F.	54	41.50	10.40	105.90	
	Demolish and Install	V.L.F.	54	60.50	14.15	128.65	
	Minimum Charge	Job		880	320	1200	
Large Diameter	Demolish	L.F.		57	11.25	68.25	Includes material and labor to install large diameter concrete column.
	Install	V.L.F.	89.50	48.50	12.25	150.25	
	Demolish and Install	V.L.F.	89.50	105.50	23.50	218.50	
	Minimum Charge	Job		880	320	1200	

Floor Framing System		Unit	Material	Labor	Equip.	Total	Specification
12" O.C. 2" x 6" Joists	Demolish	S.F.		.93		.93	Cost includes material and labor to install 2" x 6" joists, 12" O.C. including box or band joist. Blocking or bridging not included.
	Install	S.F.	1.34	.86		2.20	
	Demolish and Install	S.F.	1.34	1.79		3.13	
	Reinstall	S.F.		.69		.69	
	Minimum Charge	Job		269		269	
2" x 8" Joists	Demolish	S.F.		.96		.96	Cost includes material and labor to install 2" x 8" joists, 12" O.C. including box or band joist. Blocking or bridging not included.
	Install	S.F.	1.78	.98		2.76	
	Demolish and Install	S.F.	1.78	1.94		3.72	
	Reinstall	S.F.		.78		.78	
	Minimum Charge	Job		269		269	
2" x 10" Joists	Demolish	S.F.		.99		.99	Cost includes material and labor to install 2" x 10" joists, 12" O.C. including box or band joist. Blocking or bridging not included.
	Install	S.F.	2.42	1.19		3.61	
	Demolish and Install	S.F.	2.42	2.18		4.60	
	Reinstall	S.F.		.96		.96	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Floor Framing System		Unit	Material	Labor	Equip.	Total	Specification
2" x 12" Joists							
	Demolish	S.F.		1.02		1.02	Cost includes material and labor to install 2" x 12" joists, 12" O.C. including box or band joist. Blocking or bridging not included.
	Install	S.F.	3.42	1.23		4.65	
	Demolish and Install	S.F.	3.42	2.25		5.67	
	Reinstall	S.F.		.98		.98	
	Minimum Charge	Job		269		269	
Block / Bridge							
	Demolish	Ea.		1.41		1.41	Includes material and labor to install set of cross bridging or per block of solid bridging for 2" x 10" joists cut to size on site.
	Install	Ea.	2.75	3.02		5.77	
	Demolish and Install	Ea.	2.75	4.43		7.18	
	Minimum Charge	Job		269		269	
16" O.C.							
2" x 6" Joists							
	Demolish	S.F.		.69		.69	Cost includes material and labor to install 2" x 6" joists including box or band joist installed 16" O.C. Does not include beams, blocking or bridging.
	Install	S.F.	1.03	.64		1.67	
	Demolish and Install	S.F.	1.03	1.33		2.36	
	Reinstall	S.F.		.52		.52	
	Minimum Charge	Job		269		269	
2" x 8" Joists							
	Demolish	S.F.		.72		.72	Cost includes material and labor to install 2" x 8" joists including box or band joist installed 16" O.C. Does not include beams, blocking or bridging.
	Install	S.F.	1.38	.73		2.11	
	Demolish and Install	S.F.	1.38	1.45		2.83	
	Reinstall	S.F.		.59		.59	
	Minimum Charge	Job		269		269	
2" x 10" Joists							
	Demolish	S.F.		.74		.74	Cost includes material and labor to install 2" x 10" joists including box or band joist 16" O.C. Does not include beams, blocking or bridging.
	Install	S.F.	1.86	.90		2.76	
	Demolish and Install	S.F.	1.86	1.64		3.50	
	Reinstall	S.F.		.72		.72	
	Minimum Charge	Job		269		269	
2" x 12" Joists							
	Demolish	S.F.		.77		.77	Cost includes material and labor to install 2" x 12" joists including box or band joist installed 16" O.C. Does not include beams, blocking or bridging.
	Install	S.F.	2.63	.92		3.55	
	Demolish and Install	S.F.	2.63	1.69		4.32	
	Reinstall	S.F.		.74		.74	
	Minimum Charge	Job		269		269	
Block / Bridge							
	Demolish	Ea.		1.41		1.41	Includes material and labor to install set of cross bridging or per block of solid bridging for 2" x 10" joists cut to size on site.
	Install	Ea.	2.75	3.02		5.77	
	Demolish and Install	Ea.	2.75	4.43		7.18	
	Minimum Charge	Job		269		269	
24" O.C.							
2" x 6" Joists							
	Demolish	S.F.		.46		.46	Cost includes material and labor to install 2" x 6" joists including box or band joist installed 24" O.C. Does not include beams, blocking or bridging.
	Install	S.F.	.73	.43		1.16	
	Demolish and Install	S.F.	.73	.89		1.62	
	Reinstall	S.F.		.34		.34	
	Minimum Charge	Job		269		269	
2" x 8" Joists							
	Demolish	S.F.		.48		.48	Cost includes material and labor to install 2" x 8" joists including box or band joist installed 24" O.C. Does not include beams, blocking or bridging.
	Install	S.F.	.97	.49		1.46	
	Demolish and Install	S.F.	.97	.97		1.94	
	Reinstall	S.F.		.39		.39	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Floor Framing System		Unit	Material	Labor	Equip.	Total	Specification
2" x 10" Joists							
	Demolish	S.F.		.49		.49	Cost includes material and labor to install 2" x 10" joists including box or band joist installed 24" O.C. Does not include beams, blocking or bridging.
	Install	S.F.	1.32	.60		1.92	
	Demolish and Install	S.F.	1.32	1.09		2.41	
	Reinstall	S.F.		.48		.48	
	Minimum Charge	Job		269		269	
2" x 12" Joists							
	Demolish	S.F.		.51		.51	Cost includes material and labor to install 2" x 12" joists including box or band joist installed 24" O.C. Does not include beams, blocking or bridging.
	Install	S.F.	1.87	.62		2.49	
	Demolish and Install	S.F.	1.87	1.13		3	
	Reinstall	S.F.		.49		.49	
	Minimum Charge	Job		269		269	
Block / Bridge							
	Demolish	Ea.		1.41		1.41	Includes material and labor to install set of cross bridging or per block of solid bridging for 2" x 10" joists cut to size on site.
	Install	Ea.	2.75	3.02		5.77	
	Demolish and Install	Ea.	2.75	4.43		7.18	
	Minimum Charge	Job		269		269	
Engineered Lumber, Joist							
9-1/2"							
	Demolish	S.F.		.74		.74	Includes material and labor to install engineered lumber truss / joists per S.F. of floor area based on joists 16" O.C. Beams, supports and bridging are not included.
	Install	S.F.	3.18	.54		3.72	
	Demolish and Install	S.F.	3.18	1.28		4.46	
	Reinstall	S.F.		.43		.43	
	Minimum Charge	Job		269		269	
11-7/8"							
	Demolish	S.F.		.77		.77	Includes material and labor to install engineered lumber truss / joists per S.F. of floor area based on joists 16" O.C. Beams, supports and bridging are not included.
	Install	S.F.	.07	.55		.62	
	Demolish and Install	S.F.	.07	1.32		1.39	
	Reinstall	S.F.		.44		.44	
	Minimum Charge	Job		269		269	
14"							
	Demolish	S.F.		.79		.79	Includes material and labor to install engineered lumber truss / joists per S.F. of floor area based on joists 16" O.C. Beams, supports and bridging are not included.
	Install	S.F.	3.99	.59		4.58	
	Demolish and Install	S.F.	3.99	1.38		5.37	
	Reinstall	S.F.		.47		.47	
	Minimum Charge	Job		269		269	
16"							
	Demolish	S.F.		.82		.82	Includes material and labor to install engineered lumber truss / joists per S.F. of floor area based on joists 16" O.C. Beams, supports and bridging are not included.
	Install	S.F.	6	.62		6.62	
	Demolish and Install	S.F.	6	1.44		7.44	
	Reinstall	S.F.		.50		.50	
	Minimum Charge	Job		269		269	
Block / Bridge							
	Demolish	Pair		1.41		1.41	Includes material and labor to install set of steel, one-nail type cross bridging for trusses placed 16" O.C.
	Install	Pair	.04	3.98		4.02	
	Demolish and Install	Pair	.04	5.39		5.43	
	Minimum Charge	Job		269		269	
Block / Bridge							
2" x 6"							
	Demolish	Ea.		1.41		1.41	Includes material and labor to install set of cross bridging or per block of solid bridging for 2" x 6" joists cut to size on site.
	Install	Ea.	1.53	2.42		3.95	
	Demolish and Install	Ea.	1.53	3.83		5.36	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Floor Framing System		Unit	Material	Labor	Equip.	Total	Specification
2" x 8"							
	Demolish	Ea.		1.41		1.41	Includes material and labor to install set of cross bridging or per block of solid bridging for 2" x 8" joists cut to size on site.
	Install	Ea.	2.04	2.69		4.73	
	Demolish and Install	Ea.	2.04	4.10		6.14	
	Minimum Charge	Job		269		269	
2" x 10"							
	Demolish	Ea.		1.41		1.41	Includes material and labor to install set of cross bridging or per block of solid bridging for 2" x 10" joists cut to size on site.
	Install	Ea.	2.75	3.02		5.77	
	Demolish and Install	Ea.	2.75	4.43		7.18	
	Minimum Charge	Job		269		269	
2" x 12"							
	Demolish	Ea.		1.41		1.41	Includes material and labor to install set of cross bridging or per block of solid bridging for 2" x 12" joists cut to size on site.
	Install	Ea.	3.91	3.56		7.47	
	Demolish and Install	Ea.	3.91	4.97		8.88	
	Minimum Charge	Job		269		269	
Ledger Strips							
1" x 2"							
	Demolish	L.F.		.37		.37	Cost includes material and labor to install 1" x 2" ledger strip nailed to the face of studs, beams or joist.
	Install	L.F.	.28	1.56		1.84	
	Demolish and Install	L.F.	.28	1.93		2.21	
	Minimum Charge	Job		269		269	
1" x 3"							
	Demolish	L.F.		.37		.37	Includes material and labor to install up to 1" x 4" ledger strip nailed to the face of studs, beams or joist.
	Install	L.F.	.81	1.79		2.60	
	Demolish and Install	L.F.	.81	2.16		2.97	
	Minimum Charge	Job		269		269	
1" x 4"							
	Demolish	L.F.		.37		.37	Includes material and labor to install up to 1" x 4" ledger strip nailed to the face of studs, beams or joist.
	Install	L.F.	.81	1.79		2.60	
	Demolish and Install	L.F.	.81	2.16		2.97	
	Minimum Charge	Job		269		269	
2" x 2"							
	Demolish	L.F.		.41		.41	Cost includes material and labor to install 2" x 2" ledger strip nailed to the face of studs, beams or joist.
	Install	L.F.	.51	1.63		2.14	
	Demolish and Install	L.F.	.51	2.04		2.55	
	Minimum Charge	Job		269		269	
2" x 4"							
	Demolish	L.F.		.45		.45	Cost includes material and labor to install 2" x 4" ledger strip nailed to the face of studs, beams or joist.
	Install	L.F.	.59	2.15		2.74	
	Demolish and Install	L.F.	.59	2.60		3.19	
	Reinstall	L.F.		1.72		1.72	
	Minimum Charge	Job		269		269	
Ledger Boards							
2" x 6"							
	Demolish	L.F.		.45		.45	Cost includes material and labor to install 2" x 6" ledger board fastened to a wall, joists or studs.
	Install	L.F.	4.75	3.36		8.11	
	Demolish and Install	L.F.	4.75	3.81		8.56	
	Reinstall	L.F.		2.69		2.69	
	Minimum Charge	Job		269		269	
4" x 6"							
	Demolish	L.F.		.75		.75	Cost includes material and labor to install 4" x 6" ledger board fastened to a wall, joists or studs.
	Install	L.F.	10.40	3.84		14.24	
	Demolish and Install	L.F.	10.40	4.59		14.99	
	Reinstall	L.F.		3.07		3.07	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Floor Framing System	Unit	Material	Labor	Equip.	Total	Specification
4" x 8"						
Demolish	L.F.		1		1	Cost includes material and labor to install 4" x 8" ledger board fastened to a wall, joists or studs.
Install	L.F.	17.20	4.48		21.68	
Demolish and Install	L.F.	17.20	5.48		22.68	
Reinstall	L.F.		3.58		3.58	
Minimum Charge	Job		269		269	
Sill Plate Per L.F.						
2" x 4"						
Demolish	L.F.		.38		.38	Cost includes material and labor to install 2" x 4" pressure treated lumber, drilled and installed on foundation bolts 48" O.C. Bolts, nuts and washers are not included.
Install	L.F.	.74	1.95		2.69	
Demolish and Install	L.F.	.74	2.33		3.07	
Reinstall	L.F.		1.56		1.56	
Minimum Charge	Job		269		269	
2" x 6"						
Demolish	L.F.		.58		.58	Cost includes material and labor to install 2" x 6" pressure treated lumber, drilled and installed on foundation bolts 48" O.C. Bolts, nuts and washers not included.
Install	L.F.	1.25	2.15		3.40	
Demolish and Install	L.F.	1.25	2.73		3.98	
Reinstall	L.F.		1.72		1.72	
Minimum Charge	Job		269		269	
2" x 8"						
Demolish	L.F.		.77		.77	Cost includes material and labor to install 2" x 8" pressure treated lumber, drilled and installed on foundation bolts 48" O.C. Bolts, nuts and washers not included.
Install	L.F.	1.56	2.39		3.95	
Demolish and Install	L.F.	1.56	3.16		4.72	
Reinstall	L.F.		1.91		1.91	
Minimum Charge	Job		269		269	
Earthquake Strapping						
Install	Ea.	2.50	3.36		5.86	Includes labor and material to replace an earthquake strap.
Minimum Charge	Job		269		269	

Subflooring	Unit	Material	Labor	Equip.	Total	Specification
Plywood						
1/2"						
Demolish	S.F.		1.17		1.17	Cost includes material and labor to install 1/2" plywood subfloor, CD standard interior grade, plugged and touch sanded.
Install	SF Flr.	.74	.58		1.32	
Demolish and Install	SF Flr.	.74	1.75		2.49	
Minimum Charge	Job		269		269	
5/8"						
Demolish	S.F.		1.18		1.18	Cost includes material and labor to install 5/8" plywood subfloor, CD standard interior grade, plugged and touch sanded.
Install	SF Flr.	1.38	.64		2.02	
Demolish and Install	SF Flr.	1.38	1.82		3.20	
Reinstall	SF Flr.		.51		.51	
Minimum Charge	Job		269		269	
3/4"						
Demolish	S.F.		1.20		1.20	Cost includes material and labor to install 3/4" plywood subfloor, CD standard interior grade, plugged and touch sanded.
Install	SF Flr.	.94	.69		1.63	
Demolish and Install	SF Flr.	.94	1.89		2.83	
Reinstall	SF Flr.		.55		.55	
Minimum Charge	Job		269		269	

Rough Frame / Structure

Subflooring		Unit	Material	Labor	Equip.	Total	Specification
Particle Board							
1/2"							
	Demolish	S.F.		.59		.59	Cost includes material and labor to install 1/2" particle board subfloor.
	Install	S.F.	.68	.74		1.42	
	Demolish and Install	S.F.	.68	1.33		2.01	
	Minimum Charge	Job		269		269	
5/8"							
	Demolish	S.F.		.59		.59	Cost includes material and labor to install 5/8" particle board subfloor.
	Install	SF Flr.	1.05	.78		1.83	
	Demolish and Install	SF Flr.	1.05	1.37		2.42	
	Minimum Charge	Job		269		269	
3/4"							
	Demolish	S.F.		.60		.60	Cost includes material and labor to install 3/4" particle board subfloor.
	Install	SF Flr.	.99	.86		1.85	
	Demolish and Install	SF Flr.	.99	1.46		2.45	
	Minimum Charge	Job		269		269	
Plank Board							
	Demolish	S.F.		1.84		1.84	Cost includes material and labor to install 1" x 6" standard grade plank flooring.
	Install	SF Flr.	2.85	1.19		4.04	
	Demolish and Install	SF Flr.	2.85	3.03		5.88	
	Reinstall	SF Flr.		1.19		1.19	
	Minimum Charge	Job		269		269	
Felt Underlay							
	Demolish	S.F.		.10		.10	Includes material and labor to install #15 felt building paper.
	Install	S.F.	.09	.15		.24	
	Demolish and Install	S.F.	.09	.25		.34	
	Minimum Charge	Job		269		269	
Prep (for flooring)							
	Install	S.F.		.50		.50	Preparation of subflooring for installation of new finished flooring.
	Minimum Charge	Job		261		261	
							Cost reflects average time to prep area.

Wall Framing System		Unit	Material	Labor	Equip.	Total	Specification
2" x 4"							
8' High							
	Demolish	L.F.		6		6	Cost includes material and labor to install 2" x 4" x 8' high wall system, including studs, treated bottom plate, double top plate and one row of fire blocking.
	Install	L.F.	6.10	8.95		15.05	
	Demolish and Install	L.F.	6.10	14.95		21.05	
	Reinstall	L.F.		7.17		7.17	
	Minimum Charge	Job		269		269	
9' High							
	Demolish	L.F.		6.70		6.70	Cost includes material and labor to install 2" x 4" x 9' wall system including studs, treated bottom plate, double top plate and one row of fire blocking.
	Install	L.F.	6.60	8.95		15.55	
	Demolish and Install	L.F.	6.60	15.65		22.25	
	Reinstall	L.F.		7.17		7.17	
	Minimum Charge	Job		269		269	
10' High							
	Demolish	L.F.		7.50		7.50	Cost includes material and labor to install 2" x 4" x 10' wall system including studs, treated bottom plate, double top plate and one row of fire blocking.
	Install	L.F.	7.05	8.95		16	
	Demolish and Install	L.F.	7.05	16.45		23.50	
	Reinstall	L.F.		7.17		7.17	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Wall Framing System		Unit	Material	Labor	Equip.	Total	Specification
12' High							
	Demolish	L.F.		9		9	Cost includes material and labor to install 2" x 4" x 12' wall system including studs, treated bottom plate, double top plate and one row of fire blocking.
	Install	L.F.	7.90	11.20		19.10	
	Demolish and Install	L.F.	7.90	20.20		28.10	
	Reinstall	L.F.		8.96		8.96	
	Minimum Charge	Job		269		269	
2" x 6" 8' High							
	Demolish	L.F.		5.60		5.60	Cost includes material and labor to install 2" x 6" x 8' wall system including studs, treated bottom plate, double top plate and one row of fire blocking.
	Install	L.F.	11.65	9.95		21.60	
	Demolish and Install	L.F.	11.65	15.55		27.20	
	Reinstall	L.F.		7.96		7.96	
	Minimum Charge	Job		269		269	
9' High							
	Demolish	L.F.		6.35		6.35	Cost includes material and labor to install 2" x 6" x 9' wall system including studs, treated bottom plate, double top plate and one row of fire blocking.
	Install	L.F.	12.55	9.95		22.50	
	Demolish and Install	L.F.	12.55	16.30		28.85	
	Reinstall	L.F.		7.96		7.96	
	Minimum Charge	Job		269		269	
10' High							
	Demolish	L.F.		6.90		6.90	Cost includes material and labor to install 2" x 6" x 10' wall system including studs, treated bottom plate, double top plate and one row of fire blocking.
	Install	L.F.	13.35	9.95		23.30	
	Demolish and Install	L.F.	13.35	16.85		30.20	
	Reinstall	L.F.		7.96		7.96	
	Minimum Charge	Job		269		269	
12' High							
	Demolish	L.F.		8.20		8.20	Cost includes material and labor to install 2" x 6" x 12' wall system including studs, treated bottom plate, double top plate and one row of fire blocking.
	Install	L.F.	15.15	12.20		27.35	
	Demolish and Install	L.F.	15.15	20.40		35.55	
	Reinstall	L.F.		9.77		9.77	
	Minimum Charge	Job		269		269	
Fireblock							
2" x 4", 16" O.C. System							
	Demolish	L.F.		.75		.75	Cost includes material and labor to install 2" x 4" fireblocks in wood frame walls per L.F. of wall to be blocked.
	Install	L.F.	.59	1.79		2.38	
	Demolish and Install	L.F.	.59	2.54		3.13	
	Reinstall	L.F.		1.43		1.43	
	Minimum Charge	Job		269		269	
2" x 4", 24" O.C. System							
	Demolish	L.F.		.75		.75	Cost includes material and labor to install 2" x 4" fireblocks in wood frame walls per L.F. of wall to be blocked.
	Install	L.F.	.59	1.79		2.38	
	Demolish and Install	L.F.	.59	2.54		3.13	
	Reinstall	L.F.		1.43		1.43	
	Minimum Charge	Job		269		269	
2" x 6", 16" O.C. System							
	Demolish	L.F.		1.12		1.12	Cost includes material and labor to install 2" x 6" fireblocks in wood frame walls per L.F. of wall to be blocked.
	Install	L.F.	1.16	1.79		2.95	
	Demolish and Install	L.F.	1.16	2.91		4.07	
	Reinstall	L.F.		1.43		1.43	
	Minimum Charge	Job		269		269	
2" x 6", 24" O.C. System							
	Demolish	L.F.		1.12		1.12	Cost includes material and labor to install 2" x 6" fireblocks in wood frame walls per L.F. of wall to be blocked.
	Install	L.F.	1.16	1.79		2.95	
	Demolish and Install	L.F.	1.16	2.91		4.07	
	Reinstall	L.F.		1.43		1.43	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Wall Framing System		Unit	Material	Labor	Equip.	Total	Specification
Bracing							
1" x 3"							
	Demolish	L.F.		.43		.43	Cost includes material and labor to install 1" x 3" let-in bracing.
	Install	L.F.	.58	3.36		3.94	
	Demolish and Install	L.F.	.58	3.79		4.37	
	Minimum Charge	Job		269		269	
1" x 4"							
	Demolish	L.F.		.43		.43	Cost includes material and labor to install 1" x 4" let-in bracing.
	Install	L.F.	.81	3.36		4.17	
	Demolish and Install	L.F.	.81	3.79		4.60	
	Minimum Charge	Job		269		269	
1" x 6"							
	Demolish	L.F.		.43		.43	Cost includes material and labor to install 1" x 6" let-in bracing.
	Install	L.F.	1.33	3.58		4.91	
	Demolish and Install	L.F.	1.33	4.01		5.34	
	Minimum Charge	Job		269		269	
2" x 3"							
	Demolish	L.F.		.56		.56	Cost includes material and labor to install 2" x 3" let-in bracing.
	Install	L.F.	.51	3.58		4.09	
	Demolish and Install	L.F.	.51	4.14		4.65	
	Reinstall	L.F.		2.87		2.87	
	Minimum Charge	Job		269		269	
2" x 4"							
	Demolish	L.F.		.56		.56	Cost includes material and labor to install 2" x 4" let-in bracing.
	Install	L.F.	.59	3.58		4.17	
	Demolish and Install	L.F.	.59	4.14		4.73	
	Reinstall	L.F.		2.87		2.87	
	Minimum Charge	Job		269		269	
2" x 6"							
	Demolish	L.F.		.56		.56	Cost includes material and labor to install 2" x 6" let-in bracing.
	Install	L.F.	1.16	3.84		5	
	Demolish and Install	L.F.	1.16	4.40		5.56	
	Reinstall	L.F.		3.07		3.07	
	Minimum Charge	Job		269		269	
2" x 8"							
	Demolish	L.F.		.56		.56	Cost includes material and labor to install 2" x 8" let-in bracing.
	Install	L.F.	1.53	3.84		5.37	
	Demolish and Install	L.F.	1.53	4.40		5.93	
	Reinstall	L.F.		3.07		3.07	
	Minimum Charge	Job		269		269	
Earthquake Strapping							
	Install	Ea.	2.50	3.36		5.86	Includes labor and material to replace an earthquake strap.
	Minimum Charge	Job		269		269	
Hurricane Clips							
	Install	Ea.	1.96	3.71		5.67	Includes labor and material to install a hurricane clip.
	Minimum Charge	Job		269		269	
Stud							
2" x 4"							
	Demolish	L.F.		.45		.45	Cost includes material and labor to install 2" x 4" wall stud per L.F. of stud.
	Install	L.F.	.57	.98		1.55	
	Demolish and Install	L.F.	.57	1.43		2	
	Reinstall	L.F.		.78		.78	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Wall Framing System		Unit	Material	Labor	Equip.	Total	Specification
2" x 6"							
	Demolish	L.F.		.56		.56	Cost includes material and labor to install 2" x 6" stud per L.F. of stud.
	Install	L.F.	1.16	1.08		2.24	
	Demolish and Install	L.F.	1.16	1.64		2.80	
	Reinstall	L.F.		.86		.86	
	Minimum Charge	Job		269		269	
Plates							
2" x 4"							
	Demolish	L.F.		.41		.41	Cost includes material and labor to install 2" x 4" plate per L.F. of plate.
	Install	L.F.	.59	1.34		1.93	
	Demolish and Install	L.F.	.59	1.75		2.34	
	Reinstall	L.F.		1.08		1.08	
	Minimum Charge	Job		269		269	
2" x 6"							
	Demolish	L.F.		.43		.43	Cost includes material and labor to install 2" x 6" plate per L.F. of plate.
	Install	L.F.	1.16	1.43		2.59	
	Demolish and Install	L.F.	1.16	1.86		3.02	
	Reinstall	L.F.		1.15		1.15	
	Minimum Charge	Job		269		269	
Headers							
2" x 6"							
	Demolish	L.F.		.40		.40	Includes material and labor to install header over wall openings and around floor, ceiling and roof openings or flush beam.
	Install	L.F.	1.16	2.99		4.15	
	Demolish and Install	L.F.	1.16	3.39		4.55	
	Clean	L.F.	.01	.51		.52	
	Paint	L.F.	.24	1.76		2	
	Minimum Charge	Job		269		269	
2" x 8"							
	Demolish	L.F.		.43		.43	Includes material and labor to install header over wall openings and around floor, ceiling and roof openings or flush beam.
	Install	L.F.	1.53	3.16		4.69	
	Demolish and Install	L.F.	1.53	3.59		5.12	
	Clean	L.F.	.02	.51		.53	
	Paint	L.F.	.32	2.38		2.70	
	Minimum Charge	Job		269		269	
2" x 10"							
	Demolish	L.F.		.43		.43	Includes material and labor to install header over wall openings and around floor, ceiling and roof openings or flush beam.
	Install	L.F.	2.08	3.36		5.44	
	Demolish and Install	L.F.	2.08	3.79		5.87	
	Clean	L.F.	.02	.52		.54	
	Paint	L.F.	.40	2.94		3.34	
	Minimum Charge	Job		269		269	
2" x 12"							
	Demolish	L.F.		.45		.45	Includes material and labor to install header over wall openings and around floor, ceiling and roof openings or flush beam.
	Install	L.F.	2.94	3.58		6.52	
	Demolish and Install	L.F.	2.94	4.03		6.97	
	Clean	L.F.	.03	.52		.55	
	Paint	L.F.	.47	3.53		4	
	Minimum Charge	Job		269		269	
4" x 8"							
	Demolish	L.F.		.80		.80	Includes material and labor to install header over wall openings and around floor, ceiling and roof openings or flush beam.
	Install	L.F.	12.70	4.14		16.84	
	Demolish and Install	L.F.	12.70	4.94		17.64	
	Clean	L.F.	.02	.51		.53	
	Paint	L.F.	.32	2.38		2.70	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Wall Framing System		Unit	Material	Labor	Equip.	Total	Specification
4" x 10"	Demolish	L.F.		.86		.86	Includes material and labor to install header over wall openings and around floor, ceiling and roof openings or flush beam.
	Install	L.F.	8.70	4.48		13.18	
	Demolish and Install	L.F.	8.70	5.34		14.04	
	Clean	L.F.	.02	.52		.54	
	Paint	L.F.	.40	2.94		3.34	
	Minimum Charge	Job		269		269	
4" x 12"	Demolish	L.F.		.90		.90	Includes material and labor to install header over wall openings and around floor, ceiling and roof openings or flush beam.
	Install	L.F.	12.30	5.65		17.95	
	Demolish and Install	L.F.	12.30	6.55		18.85	
	Clean	L.F.	.03	.52		.55	
	Paint	L.F.	.47	3.53		4	
	Minimum Charge	Job		269		269	
6" x 8"	Demolish	L.F.		.80		.80	Includes material and labor to install header over wall openings and around floor, ceiling and roof openings or flush beam.
	Install	L.F.	12.95	2.99		15.94	
	Demolish and Install	L.F.	12.95	3.79		16.74	
	Clean	L.F.	.02	.51		.53	
	Paint	L.F.	.32	2.38		2.70	
	Minimum Charge	Job		269		269	
6" x 10"	Demolish	L.F.		.86		.86	Includes material and labor to install header over wall openings and around floor, ceiling and roof openings or flush beam.
	Install	L.F.	16.60	6.50		23.10	
	Demolish and Install	L.F.	16.60	7.36		23.96	
	Clean	L.F.	.02	.52		.54	
	Paint	L.F.	.40	2.94		3.34	
	Minimum Charge	Job		269		269	
6" x 12"	Demolish	L.F.		.90		.90	Includes material and labor to install header over wall openings and around floor, ceiling and roof openings or flush beam.
	Install	L.F.	20.50	7.70		28.20	
	Demolish and Install	L.F.	20.50	8.60		29.10	
	Clean	L.F.	.03	.52		.55	
	Paint	L.F.	.47	1.22		1.69	
	Minimum Charge	Job		269		269	

Rough-in Opening		Unit	Material	Labor	Equip.	Total	Specification
Door w / 2" x 4" Lumber 3' Wide	Demolish	Ea.		14.05		14.05	Includes material and labor to install header, double studs each side, cripples, blocking and nails, up to 3' opening in 2" x 4" stud wall 8' high.
	Install	Ea.	26.50	16.80		43.30	
	Demolish and Install	Ea.	26.50	30.85		57.35	
	Reinstall	Ea.		13.44		13.44	
	Minimum Charge	Job		269		269	
4' Wide	Demolish	Ea.		14.05		14.05	Includes material and labor to install header, double studs each side, cripples, blocking and nails, up to 4' opening in 2" x 4" stud wall 8' high.
	Install	Ea.	28.50	16.80		45.30	
	Demolish and Install	Ea.	28.50	30.85		59.35	
	Reinstall	Ea.		13.44		13.44	
	Minimum Charge	Job		269		269	
5' Wide	Demolish	Ea.		14.05		14.05	Includes material and labor to install header, double studs each side, cripples, blocking and nails, up to 5' opening in 2" x 4" stud wall 8' high.
	Install	Ea.	34.50	16.80		51.30	
	Demolish and Install	Ea.	34.50	30.85		65.35	
	Reinstall	Ea.		13.44		13.44	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Rough-in Opening		Unit	Material	Labor	Equip.	Total	Specification
6' Wide	Demolish	Ea.		14.05		14.05	Includes material and labor to install header, double studs each side, cripples, blocking and nails, up to 6' opening in 2" x 4" stud wall 8' high.
	Install	Ea.	38	16.80		54.80	
	Demolish and Install	Ea.	38	30.85		68.85	
	Reinstall	Ea.		13.44		13.44	
	Minimum Charge	Job		269		269	
8' Wide	Demolish	Ea.		15		15	Includes material and labor to install header, double studs each side, cripples, blocking and nails, up to 8' opening in 2" x 4" stud wall 8' high.
	Install	Ea.	53	17.90		70.90	
	Demolish and Install	Ea.	53	32.90		85.90	
	Reinstall	Ea.		14.34		14.34	
	Minimum Charge	Job		269		269	
10' Wide	Demolish	Ea.		15		15	Includes material and labor to install header, double studs each side, cripples, blocking and nails, up to 10' opening in 2" x 4" stud wall 8' high.
	Install	Ea.	78	17.90		95.90	
	Demolish and Install	Ea.	78	32.90		110.90	
	Reinstall	Ea.		14.34		14.34	
	Minimum Charge	Job		269		269	
12' Wide	Demolish	Ea.		15		15	Includes material and labor to install header, double studs each side, cripples, blocking and nails, up to 12' opening in 2" x 4" stud wall 8' high.
	Install	Ea.	233	17.90		250.90	
	Demolish and Install	Ea.	233	32.90		265.90	
	Reinstall	Ea.		14.34		14.34	
	Minimum Charge	Job		269		269	
Door w / 2" x 6" Lumber							
3' Wide	Demolish	Ea.		14.05		14.05	Includes material and labor to install header, double studs each side, cripples, blocking and nails, up to 3' opening in 2" x 6" stud wall 8' high.
	Install	Ea.	44.50	16.80		61.30	
	Demolish and Install	Ea.	44.50	30.85		75.35	
	Reinstall	Ea.		13.44		13.44	
	Minimum Charge	Job		269		269	
4' Wide	Demolish	Ea.		14.05		14.05	Includes material and labor to install header, double studs each side, cripples, blocking and nails, up to 4' opening in 2" x 6" stud wall 8' high.
	Install	Ea.	47	16.80		63.80	
	Demolish and Install	Ea.	47	30.85		77.85	
	Reinstall	Ea.		13.44		13.44	
	Minimum Charge	Job		269		269	
5' Wide	Demolish	Ea.		14.05		14.05	Includes material and labor to install header, double studs each side, cripples, blocking and nails up to 5' opening in 2" x 6" stud wall 8' high.
	Install	Ea.	53	16.80		69.80	
	Demolish and Install	Ea.	53	30.85		83.85	
	Reinstall	Ea.		13.44		13.44	
	Minimum Charge	Job		269		269	
6' Wide	Demolish	Ea.		14.05		14.05	Includes material and labor to install header, double studs each side, cripples, blocking and nails up to 6' opening in 2" x 6" stud wall 8' high.
	Install	Ea.	55.50	16.80		72.30	
	Demolish and Install	Ea.	55.50	30.85		86.35	
	Reinstall	Ea.		13.44		13.44	
	Minimum Charge	Job		269		269	
8' Wide	Demolish	Ea.		15		15	Includes material and labor to install header, double studs each side, cripples, blocking and nails up to 8' opening in 2" x 6" stud wall 8' high.
	Install	Ea.	70.50	17.90		88.40	
	Demolish and Install	Ea.	70.50	32.90		103.40	
	Reinstall	Ea.		14.34		14.34	
	Minimum Charge	Job		269		269	
10' Wide	Demolish	Ea.		15		15	Includes material and labor to install header, double studs each side, cripples, blocking and nails up to 10' opening in 2" x 6" stud wall 8' high.
	Install	Ea.	96.50	17.90		114.40	
	Demolish and Install	Ea.	96.50	32.90		129.40	
	Reinstall	Ea.		14.34		14.34	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Rough-in Opening	Unit	Material	Labor	Equip.	Total	Specification
12' Wide						
Demolish	Ea.		15		15	Includes material and labor to install header, double studs each side, cripples, blocking and nails, up to 12' opening in 2" x 6" stud wall 8' high.
Install	Ea.	252	17.90		269.90	
Demolish and Install	Ea.	252	32.90		284.90	
Reinstall	Ea.		14.34		14.34	
Minimum Charge	Job		269		269	

Rough-in Opening	Unit	Material	Labor	Equip.	Total	Specification
Window w / 2" x 4" Lumber						
2' Wide						
Demolish	Ea.		18.75		18.75	Includes material and labor to install header, double studs each side of opening, cripples, blocking, nails and sub-sills for opening up to 2' in a 2" x 4" stud wall 8' high.
Install	Ea.	26.50	22.50		49	
Demolish and Install	Ea.	26.50	41.25		67.75	
Reinstall	Ea.		17.92		17.92	
Minimum Charge	Job		269		269	
3' Wide						
Demolish	Ea.		18.75		18.75	Includes material and labor to install header, double studs each side of opening, cripples, blocking, nails and sub-sills for opening up to 3' in a 2" x 4" stud wall 8' high.
Install	Ea.	32.50	22.50		55	
Demolish and Install	Ea.	32.50	41.25		73.75	
Reinstall	Ea.		17.92		17.92	
Minimum Charge	Job		269		269	
4' Wide						
Demolish	Ea.		18.75		18.75	Includes material and labor to install header, double studs each side of opening, cripples, blocking, nails and sub-sills for opening up to 4' in a 2" x 4" stud wall 8' high.
Install	Ea.	36	22.50		58.50	
Demolish and Install	Ea.	36	41.25		77.25	
Reinstall	Ea.		17.92		17.92	
Minimum Charge	Job		269		269	
5' Wide						
Demolish	Ea.		18.75		18.75	Includes material and labor to install header, double studs each side of opening, cripples, blocking, nails and sub-sills for opening up to 5' in a 2" x 4" stud wall 8' high.
Install	Ea.	42	22.50		64.50	
Demolish and Install	Ea.	42	41.25		83.25	
Reinstall	Ea.		17.92		17.92	
Minimum Charge	Job		269		269	
6' Wide						
Demolish	Ea.		18.75		18.75	Includes material and labor to install header, double studs each side of opening, cripples, blocking, nails and sub-sills for opening up to 6' in a 2" x 4" stud wall 8' high.
Install	Ea.	47	22.50		69.50	
Demolish and Install	Ea.	47	41.25		88.25	
Reinstall	Ea.		17.92		17.92	
Minimum Charge	Job		269		269	
7' Wide						
Demolish	Ea.		18.75		18.75	Includes material and labor to install header, double studs each side of opening, cripples, blocking, nails and sub-sills for opening up to 7' in a 2" x 4" stud wall 8' high.
Install	Ea.	58	22.50		80.50	
Demolish and Install	Ea.	58	41.25		99.25	
Reinstall	Ea.		17.92		17.92	
Minimum Charge	Job		269		269	
8' Wide						
Demolish	Ea.		20.50		20.50	Includes material and labor to install header, double studs each side of opening, cripples, blocking, nails and sub-sills for opening up to 8' in a 2" x 4" stud wall 8' high.
Install	Ea.	65	24.50		89.50	
Demolish and Install	Ea.	65	45		110	
Reinstall	Ea.		19.55		19.55	
Minimum Charge	Job		269		269	

Rough Frame / Structure

Rough-in Opening		Unit	Material	Labor	Equip.	Total	Specification
10' Wide							
	Demolish	Ea.		20.50		20.50	Includes material and labor to install header, double studs each side of opening, cripples, blocking, nails and sub-sills for opening up to 10' in a 2" x 4" stud wall 8' high.
	Install	Ea.	92.50	24.50		117	
	Demolish and Install	Ea.	92.50	45		137.50	
	Reinstall	Ea.		19.55		19.55	
	Minimum Charge	Job		269		269	
12' Wide							
	Demolish	Ea.		20.50		20.50	Includes material and labor to install header, double studs each side of opening, cripples, blocking, nails and sub-sills for opening up to 12' in a 2" x 4" stud wall 8' high.
	Install	Ea.	252	24.50		276.50	
	Demolish and Install	Ea.	252	45		297	
	Reinstall	Ea.		19.55		19.55	
	Minimum Charge	Job		269		269	
Window w / 2" x 6" Lumber							
2' Wide							
	Demolish	Ea.		18.75		18.75	Includes material and labor to install header, double studs each side of opening, cripples, blocking, nails and sub-sills for opening up to 2' in a 2" x 6" stud wall 8' high.
	Install	Ea.	49	22.50		71.50	
	Demolish and Install	Ea.	49	41.25		90.25	
	Reinstall	Ea.		17.92		17.92	
	Minimum Charge	Job		269		269	
3' Wide							
	Demolish	Ea.		18.75		18.75	Includes material and labor to install header, double studs each side of opening, cripples, blocking, nails and sub-sills for opening up to 3' in a 2" x 6" stud wall 8' high.
	Install	Ea.	54	22.50		76.50	
	Demolish and Install	Ea.	54	41.25		95.25	
	Reinstall	Ea.		17.92		17.92	
	Minimum Charge	Job		269		269	
4' Wide							
	Demolish	Ea.		18.75		18.75	Includes material and labor to install header, double studs each side of opening, cripples, blocking, nails and sub-sills for opening up to 4' in a 2" x 6" stud wall 8' high.
	Install	Ea.	60	22.50		82.50	
	Demolish and Install	Ea.	60	41.25		101.25	
	Reinstall	Ea.		17.92		17.92	
	Minimum Charge	Job		269		269	
5' Wide							
	Demolish	Ea.		18.75		18.75	Includes material and labor to install header, double studs each side of opening, cripples, blocking, nails and sub-sills for opening up to 5' in a 2" x 6" stud wall 8' high.
	Install	Ea.	66.50	22.50		89	
	Demolish and Install	Ea.	66.50	41.25		107.75	
	Reinstall	Ea.		17.92		17.92	
	Minimum Charge	Job		269		269	
6' Wide							
	Demolish	Ea.		18.75		18.75	Includes material and labor to install header, double studs each side of opening, cripples, blocking, nails and sub-sills for opening up to 6' in a 2" x 6" stud wall 8' high.
	Install	Ea.	73	22.50		95.50	
	Demolish and Install	Ea.	73	41.25		114.25	
	Reinstall	Ea.		17.92		17.92	
	Minimum Charge	Job		269		269	
7' Wide							
	Demolish	Ea.		18.75		18.75	Includes material and labor to install header, double studs each side of opening, cripples, blocking, nails and sub-sills for opening up to 7' in a 2" x 6" stud wall 8' high.
	Install	Ea.	87.50	22.50		110	
	Demolish and Install	Ea.	87.50	41.25		128.75	
	Reinstall	Ea.		17.92		17.92	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Rough-in Opening		Unit	Material	Labor	Equip.	Total	Specification
8' Wide							
	Demolish	Ea.		20.50		20.50	Includes material and labor to install header, double studs each side of opening, cripples, blocking, nails and sub-sills for opening up to 8' in a 2" x 6" stud wall 8' high.
	Install	Ea.	94.50	24.50		119	
	Demolish and Install	Ea.	94.50	45		139.50	
	Reinstall	Ea.		19.55		19.55	
	Minimum Charge	Job		269		269	
10' Wide							
	Demolish	Ea.		20.50		20.50	Includes material and labor to install header, double studs each side of opening, cripples, blocking, nails and sub-sills for opening up to 10' in a 2" x 6" stud wall 8' high.
	Install	Ea.	124	24.50		148.50	
	Demolish and Install	Ea.	124	45		169	
	Reinstall	Ea.		19.55		19.55	
	Minimum Charge	Job		269		269	
12' Wide							
	Demolish	Ea.		20.50		20.50	Includes material and labor to install header, double studs each side of opening, cripples, blocking, nails and sub-sills for opening up to 12' in a 2" x 6" stud wall 8' high.
	Install	Ea.	286	24.50		310.50	
	Demolish and Install	Ea.	286	45		331	
	Reinstall	Ea.		19.55		19.55	
	Minimum Charge	Job		269		269	

Glue-Laminated Beams		Unit	Material	Labor	Equip.	Total	Specification
3-1/2" x 6"							
	Demolish	L.F.		3.34		3.34	Includes material and labor to install glue-laminated wood beam.
	Install	L.F.	9.55	4.16	4.33	18.04	
	Demolish and Install	L.F.	9.55	7.50	4.33	21.38	
	Reinstall	L.F.		3.33	3.46	6.79	
	Clean	L.F.	.11	.51		.62	
	Paint	L.F.	.73	1.30		2.03	
	Minimum Charge	Job		269		269	
3-1/2" x 9"							
	Demolish	L.F.		3.34		3.34	Includes material and labor to install glue laminated wood beam.
	Install	L.F.	12.80	4.16	4.33	21.29	
	Demolish and Install	L.F.	12.80	7.50	4.33	24.63	
	Reinstall	L.F.		3.33	3.46	6.79	
	Clean	L.F.	.14	.52		.66	
	Paint	L.F.	.95	1.68		2.63	
	Minimum Charge	Job		269		269	
3-1/2" x 12"							
	Demolish	L.F.		5		5	Includes material and labor to install glue-laminated wood beam.
	Install	L.F.	17.05	4.16	4.33	25.54	
	Demolish and Install	L.F.	17.05	9.16	4.33	30.54	
	Reinstall	L.F.		3.33	3.46	6.79	
	Clean	L.F.	.18	.54		.72	
	Paint	L.F.	1.17	2.10		3.27	
	Minimum Charge	Job		269		269	
3-1/2" x 15"							
	Demolish	L.F.		5		5	Includes material and labor to install glue-laminated wood beam.
	Install	L.F.	21.50	4.30	4.48	30.28	
	Demolish and Install	L.F.	21.50	9.30	4.48	35.28	
	Reinstall	L.F.		3.44	3.58	7.02	
	Clean	L.F.	.21	.56		.77	
	Paint	L.F.	1.36	2.45		3.81	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Glue-Laminated Beams		Unit	Material	Labor	Equip.	Total	Specification
3-1/2" x 18"							
	Demolish	L.F.		6.25		6.25	Includes material and labor to install glue-laminated wood beam.
	Install	L.F.	28.50	4.30	4.48	37.28	
	Demolish and Install	L.F.	28.50	10.55	4.48	43.53	
	Reinstall	L.F.		3.44	3.58	7.02	
	Clean	L.F.	.24	.58		.82	
	Paint	L.F.	1.61	2.84		4.45	
	Minimum Charge	Job		269		269	
5-1/8" x 6"							
	Demolish	L.F.		5		5	Includes material and labor to install glue-laminated wood beam.
	Install	L.F.	13.95	4.16	4.33	22.44	
	Demolish and Install	L.F.	13.95	9.16	4.33	27.44	
	Reinstall	L.F.		3.33	3.46	6.79	
	Clean	L.F.	.12	.51		.63	
	Paint	L.F.	.78	1.42		2.20	
	Minimum Charge	Job		269		269	
5-1/8" x 9"							
	Demolish	L.F.		6.25		6.25	Includes material and labor to install glue-laminated wood beam.
	Install	L.F.	21	4.16	4.33	29.49	
	Demolish and Install	L.F.	21	10.41	4.33	35.74	
	Reinstall	L.F.		3.33	3.46	6.79	
	Clean	L.F.	.15	.52		.67	
	Paint	L.F.	1.01	1.82		2.83	
	Minimum Charge	Job		269		269	
5-1/8" x 12"							
	Demolish	L.F.		7.45		7.45	Includes material and labor to install glue-laminated wood beam.
	Install	L.F.	28	4.16	4.33	36.49	
	Demolish and Install	L.F.	28	11.61	4.33	43.94	
	Reinstall	L.F.		3.33	3.46	6.79	
	Clean	L.F.	.19	.54		.73	
	Paint	L.F.	1.24	2.20		3.44	
	Minimum Charge	Job		269		269	
5-1/8" x 18"							
	Demolish	L.F.		12.55		12.55	Includes material and labor to install glue-laminated wood beam.
	Install	L.F.	42	4.30	4.48	50.78	
	Demolish and Install	L.F.	42	16.85	4.48	63.33	
	Reinstall	L.F.		3.44	3.58	7.02	
	Clean	L.F.	.25	.58		.83	
	Paint	L.F.	1.44	2.98		4.42	
	Minimum Charge	Job		269		269	
6-3/4" x 12"							
	Demolish	L.F.		7.45		7.45	Includes material and labor to install glue-laminated wood beam.
	Install	L.F.	37	4.30	4.48	45.78	
	Demolish and Install	L.F.	37	11.75	4.48	53.23	
	Reinstall	L.F.		3.44	3.58	7.02	
	Clean	L.F.	.21	.56		.77	
	Paint	L.F.	1.36	2.45		3.81	
	Minimum Charge	Job		269		269	
6-3/4" x 15"							
	Demolish	L.F.		12.55		12.55	Includes material and labor to install glue-laminated wood beam.
	Install	L.F.	46	4.30	4.48	54.78	
	Demolish and Install	L.F.	46	16.85	4.48	67.33	
	Reinstall	L.F.		3.44	3.58	7.02	
	Clean	L.F.	.24	.58		.82	
	Paint	L.F.	1.61	2.84		4.45	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Glue-Laminated Beams		Unit	Material	Labor	Equip.	Total	Specification
6-3/4" x 18"							
	Demolish	L.F.		12.55		12.55	Includes material and labor to install glue-laminated wood beam.
	Install	L.F.	55.50	4.46	4.64	64.60	
	Demolish and Install	L.F.	55.50	17.01	4.64	77.15	
	Reinstall	L.F.		3.56	3.71	7.27	
	Clean	L.F.	.28	.60		.88	
	Paint	L.F.	1.83	3.24		5.07	
	Minimum Charge	Job		269		269	
Hardware							
5-1/4" Glue-Lam Seat							
	Install	Ea.	55	2.99		57.99	Includes labor and material to install beam hangers.
	Minimum Charge	Job		269		269	
6-3/4" Glue-Lam Seat							
	Install	Ea.	77.50	2.99		80.49	Includes labor and material to install beam hangers.
	Minimum Charge	Job		269		269	
Earthquake Strapping							
	Install	Ea.	2.50	3.36		5.86	Includes labor and material to replace an earthquake strap.
	Minimum Charge	Job		269		269	
Hurricane Clips							
	Install	Ea.	1.96	3.71		5.67	Includes labor and material to install a hurricane clip.
	Minimum Charge	Job		269		269	

Metal Stud Framing		Unit	Material	Labor	Equip.	Total	Specification
16" O.C. System							
4", 16 Ga.							
	Demolish	S.F.		1.64		1.64	Includes material and labor to install load bearing cold rolled metal stud walls, to 10' high, including studs, top and bottom track and screws.
	Install	S.F.	2.89	1.65		4.54	
	Demolish and Install	S.F.	2.89	3.29		6.18	
	Reinstall	S.F.		1.32		1.32	
	Minimum Charge	Job		269		269	
6", 16 Ga.							
	Demolish	S.F.		1.64		1.64	Includes material and labor to install load bearing cold rolled metal stud walls, to 10' high, including studs, top and bottom track and screws.
	Install	S.F.	3.47	1.68		5.15	
	Demolish and Install	S.F.	3.47	3.32		6.79	
	Reinstall	S.F.		1.34		1.34	
	Minimum Charge	Job		269		269	
4", 25 Ga.							
	Demolish	S.F.		1.14		1.14	Includes material and labor to install cold rolled metal stud walls, to 10' high, including studs, top and bottom track and screws.
	Install	S.F.	1.34	1.13		2.47	
	Demolish and Install	S.F.	1.34	2.27		3.61	
	Reinstall	S.F.		.91		.91	
	Minimum Charge	Job		269		269	
6", 25 Ga.							
	Demolish	S.F.		1.14		1.14	Includes material and labor to install cold rolled metal stud walls, to 10' high, including studs, top and bottom track and screws.
	Install	S.F.	1.05	1.14		2.19	
	Demolish and Install	S.F.	1.05	2.28		3.33	
	Reinstall	S.F.		.92		.92	
	Minimum Charge	Job		269		269	
24" O.C. System							
4", 25 Ga.							
	Demolish	S.F.		.97		.97	Includes material and labor to install cold rolled metal stud walls, to 10' high, including studs, top and bottom track and screws.
	Install	S.F.	.97	.73		1.70	
	Demolish and Install	S.F.	.97	1.70		2.67	
	Reinstall	S.F.		.58		.58	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Metal Stud Framing		Unit	Material	Labor	Equip.	Total	Specification
6", 25 Ga.	Demolish	S.F.		.97		.97	Includes material and labor to install cold rolled metal stud walls, to 10' high, including studs, top and bottom track and screws.
	Install	S.F.	.77	.74		1.51	
	Demolish and Install	S.F.	.77	1.71		2.48	
	Reinstall	S.F.		.59		.59	
	Minimum Charge	Job		269		269	
4", 16 Ga.	Demolish	L.F.		11		11	Includes material and labor to install load bearing cold rolled metal stud walls, to 10' high, including studs, top and bottom track and screws.
	Install	S.F.	2.10	1.19		3.29	
	Demolish and Install	S.F.	2.10	12.19		14.29	
	Reinstall	S.F.		.96		.96	
	Minimum Charge	Job		269		269	
6", 16 Ga.	Demolish	L.F.		11		11	Includes material and labor to install load bearing cold rolled metal stud walls, to 10' high, including studs, top and bottom track and screws.
	Install	S.F.	2.53	1.22		3.75	
	Demolish and Install	S.F.	2.53	12.22		14.75	
	Reinstall	S.F.		.98		.98	
	Minimum Charge	Job		269		269	

Metal Joist		Unit	Material	Labor	Equip.	Total	Specification
Bar Joist 18K9	Demolish	L.F.		1.33	1.36	2.69	Includes material, labor and equipment to install open web joist.
	Install	L.F.	10.55	2.72	1.82	15.09	
	Demolish and Install	L.F.	10.55	4.05	3.18	17.78	
	Reinstall	L.F.		2.17	1.46	3.63	
	Minimum Charge	Job		2475	2600	5075	
16K6	Demolish	L.F.		1.33	1.36	2.69	Includes material, labor and equipment to install open web joist.
	Install	L.F.	11.60	1.81	.14	13.55	
	Demolish and Install	L.F.	11.60	3.14	1.50	16.24	
	Reinstall	L.F.		1.45	.11	1.56	
	Minimum Charge	Job		2475	2600	5075	

Exterior Sheathing		Unit	Material	Labor	Equip.	Total	Specification
CDX Plywood 5/16"	Demolish	S.F.		.77		.77	Cost includes material and labor to install 5/16" CDX plywood sheathing.
	Install	S.F.	1.13	.67		1.80	
	Demolish and Install	S.F.	1.13	1.44		2.57	
	Minimum Charge	Job		269		269	
3/8"	Demolish	S.F.		.78		.78	Cost includes material and labor to install 3/8" CDX plywood sheathing.
	Install	S.F.	.77	.90		1.67	
	Demolish and Install	S.F.	.77	1.68		2.45	
	Minimum Charge	Job		269		269	
1/2"	Demolish	S.F.		.80		.80	Cost includes material and labor to install 1/2" CDX plywood sheathing.
	Install	S.F.	.98	.96		1.94	
	Demolish and Install	S.F.	.98	1.76		2.74	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Exterior Sheathing		Unit	Material	Labor	Equip.	Total	Specification
5/8"	Demolish	S.F.		.82		.82	Cost includes material and labor to install 5/8" CDX plywood sheathing.
	Install	S.F.	1.82	1.02		2.84	
	Demolish and Install	S.F.	1.82	1.84		3.66	
	Minimum Charge	Job		269		269	
3/4"	Demolish	S.F.		.84		.84	Cost includes material and labor to install 3/4" CDX plywood sheathing.
	Install	S.F.	1.23	1.10		2.33	
	Demolish and Install	S.F.	1.23	1.94		3.17	
	Minimum Charge	Job		269		269	
OSB							
1/2"	Demolish	S.F.		.80		.80	Cost includes material and labor to install 4' x 8' x 1/2" OSB sheathing.
	Install	S.F.	.59	.77		1.36	
	Demolish and Install	S.F.	.59	1.57		2.16	
	Minimum Charge	Job		269		269	
5/8"	Demolish	S.F.		.82		.82	Cost includes material and labor to install 4' x 8' x 5/8" OSB sheathing.
	Install	S.F.	.59	.62		1.21	
	Demolish and Install	S.F.	.59	1.44		2.03	
	Minimum Charge	Job		269		269	
Vapor Barrier							
Black Paper							
	Install	S.F.	.09	.15		.24	Includes material and labor to install #15 felt building paper.
	Minimum Charge	Job		269		269	

Plywood Sheathing		Unit	Material	Labor	Equip.	Total	Specification
Finish Plywood							
5/16"	Demolish	S.F.		.77		.77	Includes material and labor to install exterior 5/16" AC plywood on walls.
	Install	S.F.	.76	.34		1.10	
	Demolish and Install	S.F.	.76	1.11		1.87	
	Minimum Charge	Job		269		269	
3/8"	Demolish	S.F.		.78		.78	Includes material and labor to install exterior 3/8" AC plywood on walls.
	Install	S.F.	.76	.45		1.21	
	Demolish and Install	S.F.	.76	1.23		1.99	
	Minimum Charge	Job		269		269	
1/2"	Demolish	S.F.		.80		.80	Includes material and labor to install exterior 1/2" AC plywood on walls.
	Install	S.F.	2.26	.48		2.74	
	Demolish and Install	S.F.	2.26	1.28		3.54	
	Minimum Charge	Job		269		269	
5/8"	Demolish	S.F.		.82		.82	Includes material and labor to install exterior 5/8" AC plywood on walls.
	Install	S.F.	1.87	.48		2.35	
	Demolish and Install	S.F.	1.87	1.30		3.17	
	Reinstall	S.F.		.48		.48	
3/4"	Minimum Charge	Job		269		269	Includes material and labor to install exterior 3/4" AC plywood on walls.
	Demolish	S.F.		.84		.84	
	Install	S.F.	1.96	.48		2.44	
	Demolish and Install	S.F.	1.96	1.32		3.28	
	Reinstall	S.F.		.48		.48	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Stairs		Unit	Material	Labor	Equip.	Total	Specification
Job-built							
Treads and Risers							
	Demolish	Ea.		56		56	Includes material and labor to install three 2" x 12" stringers, treads and risers of 3/4" CDX plywood, installed in a straight or "L" shaped run including carpet.
	Install	Ea.	3000	540		3540	
	Demolish and Install	Ea.	3000	596		3596	
	Clean	Flight	3.27	35		38.27	
	Paint	Ea.	.20	88		88.20	
	Minimum Charge	Job		269		269	
Landing							
	Demolish	S.F.		.45		.45	Includes material and labor to install landing framing, 3/4" CDX plywood surface and carpet.
	Install	S.F.	66	3.73		69.73	
	Demolish and Install	S.F.	66	4.18		70.18	
	Clean	S.F.		.51		.51	
	Paint	S.F.	1.03	1.09		2.12	
	Minimum Charge	Job		269		269	

Ceiling Framing		Unit	Material	Labor	Equip.	Total	Specification
16" O.C. System							
2" x 6" Joists							
	Demolish	S.F.		.69		.69	Cost includes material and labor to install 2" x 6" joists including end and header joist installed 16" O.C. Does not include beams, ledger strips, blocking or bridging.
	Install	S.F.	.87	.88		1.75	
	Demolish and Install	S.F.	.87	1.57		2.44	
	Reinstall	S.F.		.71		.71	
	Minimum Charge	Job		269		269	
2" x 8" Joists							
	Demolish	S.F.		.72		.72	Cost includes material and labor to install 2" x 8" joists including end and header joist installed 16" O.C. Does not include beams, ledger strips, blocking or bridging.
	Install	S.F.	1.17	1.09		2.26	
	Demolish and Install	S.F.	1.17	1.81		2.98	
	Reinstall	S.F.		.87		.87	
	Minimum Charge	Job		269		269	
2" x 10" Joists							
	Demolish	S.F.		.74		.74	Cost includes material and labor to install 2" x 10" joists including end and header joist installed 16" O.C. Does not include beams, ledger strips, blocking or bridging.
	Install	S.F.	1.57	1.29		2.86	
	Demolish and Install	S.F.	1.57	2.03		3.60	
	Reinstall	S.F.		1.03		1.03	
	Minimum Charge	Job		269		269	
2" x 12" Joists							
	Demolish	S.F.		.77		.77	Cost includes material and labor to install 2" x 12" joists including end and header joist installed 16" O.C. Does not include beams, ledger strips, blocking or bridging.
	Install	S.F.	2.23	1.57		3.80	
	Demolish and Install	S.F.	2.23	2.34		4.57	
	Reinstall	S.F.		1.26		1.26	
	Minimum Charge	Job		269		269	
Block / Bridge							
	Demolish	Ea.		1.41		1.41	Includes material and labor to install set of cross bridging or per block of solid bridging for 2" x 10" joists cut to size on site.
	Install	Ea.	2.75	3.02		5.77	
	Demolish and Install	Ea.	2.75	4.43		7.18	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Ceiling Framing		Unit	Material	Labor	Equip.	Total	Specification
24" O.C. System							
2" x 6" Joists							
Demolish	S.F.			.46		.46	Cost includes material and labor to install 2" x 6" joists including end and header joist installed 24" O.C. Does not include beams, ledger strips, blocking or bridging.
Install	S.F.	.58		.59		1.17	
Demolish and Install	S.F.	.58		1.05		1.63	
Reinstall	S.F.			.47		.47	
Minimum Charge	Job			269		269	
2" x 8" Joists							
Demolish	S.F.			.48		.48	Cost includes material and labor to install 2" x 8" joists including end and header joist installed 24" O.C. Does not include beams, ledger strips, blocking or bridging.
Install	S.F.	.78		.73		1.51	
Demolish and Install	S.F.	.78		1.21		1.99	
Reinstall	S.F.			.58		.58	
Minimum Charge	Job			269		269	
2" x 10" Joists							
Demolish	S.F.			.49		.49	Cost includes material and labor to install 2" x 10" joists including end and header joist installed 24" O.C. Does not include beams, ledger strips, blocking or bridging.
Install	S.F.	1.06		.86		1.92	
Demolish and Install	S.F.	1.06		1.35		2.41	
Reinstall	S.F.			.69		.69	
Minimum Charge	Job			269		269	
2" x 12" Joists							
Demolish	S.F.			.51		.51	Cost includes material and labor to install 2" x 12" joists including end and header joist installed 24" O.C. Does not include beams, ledger strips, blocking or bridging.
Install	S.F.	1.50		1.05		2.55	
Demolish and Install	S.F.	1.50		1.56		3.06	
Reinstall	S.F.			.84		.84	
Minimum Charge	Job			269		269	
Block / Bridge							
Demolish	Ea.			1.41		1.41	Includes material and labor to install set of cross bridging or per block of solid bridging for 2" x 10" joists cut to size on site.
Install	Ea.	2.75		3.02		5.77	
Demolish and Install	Ea.	2.75		4.43		7.18	
Minimum Charge	Job			269		269	
Ledger Strips							
1" x 2"							
Demolish	L.F.			.37		.37	Cost includes material and labor to install 1" x 2" ledger strip nailed to the face of studs, beams or joist.
Install	L.F.	.28		1.56		1.84	
Demolish and Install	L.F.	.28		1.93		2.21	
Minimum Charge	Job			269		269	
1" x 3"							
Demolish	L.F.			.37		.37	Includes material and labor to install up to 1" x 4" ledger strip nailed to the face of studs, beams or joist.
Install	L.F.	.81		1.79		2.60	
Demolish and Install	L.F.	.81		2.16		2.97	
Minimum Charge	Job			269		269	
1" x 4"							
Demolish	L.F.			.37		.37	Includes material and labor to install up to 1" x 4" ledger strip nailed to the face of studs, beams or joist.
Install	L.F.	.81		1.79		2.60	
Demolish and Install	L.F.	.81		2.16		2.97	
Minimum Charge	Job			269		269	
2" x 2"							
Demolish	L.F.			.41		.41	Cost includes material and labor to install 2" x 2" ledger strip nailed to the face of studs, beams or joist.
Install	L.F.	.51		1.63		2.14	
Demolish and Install	L.F.	.51		2.04		2.55	
Minimum Charge	Job			269		269	
2" x 4"							
Demolish	L.F.			.45		.45	Cost includes material and labor to install 2" x 4" ledger strip nailed to the face of studs, beams or joist.
Install	L.F.	.59		2.15		2.74	
Demolish and Install	L.F.	.59		2.60		3.19	
Reinstall	L.F.			1.72		1.72	
Minimum Charge	Job			269		269	

Rough Frame / Structure

Ceiling Framing		Unit	Material	Labor	Equip.	Total	Specification
Ledger Boards							
2" x 4"							
	Demolish	L.F.		.45		.45	Cost includes material and labor to install 2" x 4" ledger board fastened to a wall, joists or studs.
	Install	L.F.	4.21	2.99		7.20	
	Demolish and Install	L.F.	4.21	3.44		7.65	
	Reinstall	L.F.		2.39		2.39	
	Minimum Charge	Job		269		269	
4" x 6"							
	Demolish	L.F.		.75		.75	Cost includes material and labor to install 4" x 6" ledger board fastened to a wall, joists or studs.
	Install	L.F.	10.40	3.84		14.24	
	Demolish and Install	L.F.	10.40	4.59		14.99	
	Reinstall	L.F.		3.07		3.07	
	Minimum Charge	Job		269		269	
4" x 8"							
	Demolish	L.F.		1		1	Cost includes material and labor to install 4" x 8" ledger board fastened to a wall, joists or studs.
	Install	L.F.	17.20	4.48		21.68	
	Demolish and Install	L.F.	17.20	5.48		22.68	
	Reinstall	L.F.		3.58		3.58	
	Minimum Charge	Job		269		269	
Earthquake Strapping							
	Install	Ea.	2.50	3.36		5.86	Includes labor and material to replace an earthquake strap.
	Minimum Charge	Job		269		269	
Hurricane Clips							
	Install	Ea.	1.96	3.71		5.67	Includes labor and material to install a hurricane clip.
	Minimum Charge	Job		269		269	

Roof Framing		Unit	Material	Labor	Equip.	Total	Specification
16" O.C. System							
2" x 4" Rafters							
	Demolish	S.F.		1.02		1.02	Cost includes material and labor to install 2" x 4", 16" O.C. rafter framing for flat, shed or gable roofs, 25' span, up to 5/12 slope, per S.F. of roof.
	Install	S.F.	.45	.96		1.41	
	Demolish and Install	S.F.	.45	1.98		2.43	
	Reinstall	S.F.		.77		.77	
	Minimum Charge	Job		269		269	
2" x 6" Rafters							
	Demolish	S.F.		1.07		1.07	Cost includes material and labor to install 2" x 6", 16" O.C. rafter framing for flat, shed or gable roofs, 25' span, up to 5/12 slope, per S.F. of roof.
	Install	S.F.	.86	1.01		1.87	
	Demolish and Install	S.F.	.86	2.08		2.94	
	Reinstall	S.F.		.81		.81	
	Minimum Charge	Job		269		269	
2" x 8" Rafters							
	Demolish	S.F.		1.10		1.10	Cost includes material and labor to install 2" x 8", 16" O.C. rafter framing for flat, shed or gable roofs, 25' span, up to 5/12 slope, per S.F. of roof.
	Install	S.F.	1.14	1.08		2.22	
	Demolish and Install	S.F.	1.14	2.18		3.32	
	Reinstall	S.F.		.86		.86	
	Minimum Charge	Job		269		269	
2" x 10" Rafters							
	Demolish	S.F.		1.10		1.10	Cost includes material and labor to install 2" x 10", 16" O.C. rafter framing for flat, shed or gable roofs, 25' span, up to 5/12 slope, per S.F. of roof.
	Install	S.F.	1.56	1.63		3.19	
	Demolish and Install	S.F.	1.56	2.73		4.29	
	Reinstall	S.F.		1.30		1.30	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Roof Framing		Unit	Material	Labor	Equip.	Total	Specification
2" x 12" Rafters							
	Demolish	S.F.		1.11		1.11	Cost includes material and labor to install 2" x 12", 16" O.C. rafter framing for flat, shed or gable roofs, 25' span, up to 5/12 slope, per S.F. of roof.
	Install	S.F.	2.20	1.77		3.97	
	Demolish and Install	S.F.	2.20	2.88		5.08	
	Reinstall	S.F.		1.42		1.42	
	Minimum Charge	Job		269		269	
24" O.C. System							
2" x 4" Rafters							
	Demolish	S.F.		.77		.77	Cost includes material and labor to install 2" x 4", 24" O.C. rafter framing for flat, shed or gable roofs, 25' span, up to 5/12 slope, per S.F. of roof.
	Install	S.F.	.30	.72		1.02	
	Demolish and Install	S.F.	.30	1.49		1.79	
	Reinstall	S.F.		.58		.58	
	Minimum Charge	Job		269		269	
2" x 6" Rafters							
	Demolish	S.F.		.81		.81	Cost includes material and labor to install 2" x 6", 24" O.C. rafter framing for flat, shed or gable roofs, 25' span, up to 5/12 slope, per S.F. of roof.
	Install	S.F.	.57	.76		1.33	
	Demolish and Install	S.F.	.57	1.57		2.14	
	Reinstall	S.F.		.61		.61	
	Minimum Charge	Job		269		269	
2" x 8" Rafters							
	Demolish	S.F.		.82		.82	Cost includes material and labor to install 2" x 8", 24" O.C. rafter framing for flat, shed or gable roofs, 25' span, up to 5/12 slope, per S.F. of roof.
	Install	S.F.	.77	.81		1.58	
	Demolish and Install	S.F.	.77	1.63		2.40	
	Reinstall	S.F.		.65		.65	
	Minimum Charge	Job		269		269	
2" x 10" Rafters							
	Demolish	S.F.		.82		.82	Cost includes material and labor to install 2" x 10", 24" O.C. rafter framing for flat, shed or gable roofs, 25' span, up to 5/12 slope, per S.F. of roof.
	Install	S.F.	1.03	1.22		2.25	
	Demolish and Install	S.F.	1.03	2.04		3.07	
	Reinstall	S.F.		.98		.98	
	Minimum Charge	Job		269		269	
2" x 12" Rafters							
	Demolish	S.F.		.84		.84	Cost includes material and labor to install 2" x 12", 24" O.C. rafter framing for flat, shed or gable roofs, 25' span, up to 5/12 slope, per S.F. of roof.
	Install	S.F.	1.46	1.33		2.79	
	Demolish and Install	S.F.	1.46	2.17		3.63	
	Reinstall	S.F.		1.07		1.07	
	Minimum Charge	Job		269		269	
Rafter							
2" x 4"							
	Demolish	L.F.		1.04		1.04	Cost includes material and labor to install 2" x 4" rafters for flat, shed or gable roofs, up to 5/12 slope, 25' span, per L.F.
	Install	L.F.	.59	1.34		1.93	
	Demolish and Install	L.F.	.59	2.38		2.97	
	Reinstall	L.F.		1.08		1.08	
	Minimum Charge	Job		269		269	
2" x 6"							
	Demolish	L.F.		1.06		1.06	Cost includes material and labor to install 2" x 6" rafters for flat, shed or gable roofs, up to 5/12 slope, 25' span, per L.F.
	Install	L.F.	1.16	1.34		2.50	
	Demolish and Install	L.F.	1.16	2.40		3.56	
	Reinstall	L.F.		1.08		1.08	
	Minimum Charge	Job		269		269	
2" x 8"							
	Demolish	L.F.		1.07		1.07	Cost includes material and labor to install 2" x 8" rafters for flat, shed or gable roofs, up to 5/12 slope, 25' span, per L.F.
	Install	L.F.	1.53	1.43		2.96	
	Demolish and Install	L.F.	1.53	2.50		4.03	
	Reinstall	L.F.		1.15		1.15	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Roof Framing		Unit	Material	Labor	Equip.	Total	Specification
2" x 10"	Demolish	L.F.		1.09		1.09	Cost includes material and labor to install 2" x 10" rafters for flat, shed or gable roofs, up to 5/12 slope, 25' span, per L.F.
	Install	L.F.	2.08	2.17		4.25	
	Demolish and Install	L.F.	2.08	3.26		5.34	
	Reinstall	L.F.		1.74		1.74	
	Minimum Charge	Job		269		269	
2" x 12"	Demolish	L.F.		1.11		1.11	Cost includes material and labor to install 2" x 12" rafters for flat, shed or gable roofs, up to 5/12 slope, 25' span, per L.F.
	Install	L.F.	2.94	2.36		5.30	
	Demolish and Install	L.F.	2.94	3.47		6.41	
	Reinstall	L.F.		1.89		1.89	
	Minimum Charge	Job		269		269	
2"x 4" Valley / Jack	Demolish	L.F.		1.04		1.04	Includes material and labor to install up to 2" x 6" valley/jack rafters for flat, shed or gable roofs, up to 5/12 slope, 25' span, per L.F.
	Install	L.F.	1.16	2.26		3.42	
	Demolish and Install	L.F.	1.16	3.30		4.46	
	Reinstall	L.F.		1.81		1.81	
	Minimum Charge	Job		269		269	
2"x 6" Valley / Jack	Demolish	L.F.		1.06		1.06	Includes material and labor to install up to 2" x 6" valley/jack rafters for flat, shed or gable roofs, up to 5/12 slope, 25' span, per L.F.
	Install	L.F.	1.16	2.26		3.42	
	Demolish and Install	L.F.	1.16	3.32		4.48	
	Reinstall	L.F.		1.81		1.81	
	Minimum Charge	Job		269		269	
Ridgeboard							
2" x 4"	Demolish	L.F.		1		1	Cost includes material and labor to install 2" x 4" ridgeboard for flat, shed or gable roofs, up to 5/12 slope, 25' span, per L.F.
	Install	L.F.	.59	1.95		2.54	
	Demolish and Install	L.F.	.59	2.95		3.54	
	Reinstall	L.F.		1.56		1.56	
	Minimum Charge	Job		269		269	
2" x 6"	Demolish	L.F.		1.03		1.03	Cost includes material and labor to install 2" x 6" ridgeboard for flat, shed or gable roofs, up to 5/12 slope, 25' span, per L.F.
	Install	L.F.	1.16	2.15		3.31	
	Demolish and Install	L.F.	1.16	3.18		4.34	
	Reinstall	L.F.		1.72		1.72	
	Minimum Charge	Job		269		269	
2" x 8"	Demolish	L.F.		1.06		1.06	Cost includes material and labor to install 2" x 8" ridgeboard for flat, shed or gable roofs, up to 5/12 slope, 25' span, per L.F.
	Install	L.F.	1.53	2.39		3.92	
	Demolish and Install	L.F.	1.53	3.45		4.98	
	Reinstall	L.F.		1.91		1.91	
	Minimum Charge	Job		269		269	
2" x 10"	Demolish	L.F.		1.09		1.09	Cost includes material and labor to install 2" x 10" ridgeboard for flat, shed or gable roofs, up to 5/12 slope, 25' span, per L.F.
	Install	L.F.	2.08	2.69		4.77	
	Demolish and Install	L.F.	2.08	3.78		5.86	
	Reinstall	L.F.		2.15		2.15	
	Minimum Charge	Job		269		269	
2" x 12"	Demolish	L.F.		1.12		1.12	Cost includes material and labor to install 2" x 12" ridgeboard for flat, shed or gable roofs, up to 5/12 slope, 25' span, per L.F.
	Install	L.F.	2.94	1.54		4.48	
	Demolish and Install	L.F.	2.94	2.66		5.60	
	Reinstall	L.F.		1.23		1.23	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Roof Framing		Unit	Material	Labor	Equip.	Total	Specification
Collar Beam							
1" x 6"							
	Demolish	L.F.		.79		.79	Cost includes material and labor to install 1" x 6" collar beam or tie for roof framing.
	Install	L.F.	1.33	.67		2	
	Demolish and Install	L.F.	1.33	1.46		2.79	
	Reinstall	L.F.		.54		.54	
	Minimum Charge	Job		269		269	
2" x 6"							
	Demolish	L.F.		.93		.93	Cost includes material and labor to install 2" x 6" collar beam or tie for roof framing.
	Install	L.F.	1.16	.67		1.83	
	Demolish and Install	L.F.	1.16	1.60		2.76	
	Reinstall	L.F.		.54		.54	
	Minimum Charge	Job		269		269	
Purlins							
2" x 6"							
	Demolish	L.F.		.90		.90	Cost includes material and labor to install 2" x 6" purlins below roof rafters.
	Install	L.F.	1.16	.60		1.76	
	Demolish and Install	L.F.	1.16	1.50		2.66	
	Reinstall	L.F.		.48		.48	
	Minimum Charge	Job		269		269	
2" x 8"							
	Demolish	L.F.		.91		.91	Cost includes material and labor to install 2" x 8" purlins below roof rafters.
	Install	L.F.	1.53	.60		2.13	
	Demolish and Install	L.F.	1.53	1.51		3.04	
	Reinstall	L.F.		.48		.48	
	Minimum Charge	Job		269		269	
2" x 10"							
	Demolish	L.F.		.92		.92	Cost includes material and labor to install 2" x 10" purlins below roof rafters.
	Install	L.F.	2.08	.61		2.69	
	Demolish and Install	L.F.	2.08	1.53		3.61	
	Reinstall	L.F.		.49		.49	
	Minimum Charge	Job		269		269	
2" x 12"							
	Demolish	L.F.		.93		.93	Cost includes material and labor to install 2" x 12" purlins below roof rafters.
	Install	L.F.	2.94	.62		3.56	
	Demolish and Install	L.F.	2.94	1.55		4.49	
	Reinstall	L.F.		.49		.49	
	Minimum Charge	Job		269		269	
4" x 6"							
	Demolish	L.F.		.93		.93	Cost includes material and labor to install 4" x 6" purlins below roof rafters.
	Install	L.F.	5.85	.62		6.47	
	Demolish and Install	L.F.	5.85	1.55		7.40	
	Reinstall	L.F.		.49		.49	
	Minimum Charge	Job		269		269	
4" x 8"							
	Demolish	L.F.		.94		.94	Cost includes material and labor to install 4" x 8" purlins below roof rafters.
	Install	L.F.	12.70	.63		13.33	
	Demolish and Install	L.F.	12.70	1.57		14.27	
	Reinstall	L.F.		.51		.51	
	Minimum Charge	Job		269		269	
Ledger Board							
2" x 6"							
	Demolish	L.F.		.45		.45	Cost includes material and labor to install 2" x 6" ledger board nailed to the face of a rafter.
	Install	L.F.	1.16	2.42		3.58	
	Demolish and Install	L.F.	1.16	2.87		4.03	
	Reinstall	L.F.		1.94		1.94	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Roof Framing		Unit	Material	Labor	Equip.	Total	Specification
4" x 6"	Demolish	L.F.		.75		.75	Cost includes material and labor to install 4" x 6" ledger board nailed to the face of a rafter.
	Install	L.F.	5.85	3.56		9.41	
	Demolish and Install	L.F.	5.85	4.31		10.16	
	Reinstall	L.F.		2.85		2.85	
	Minimum Charge	Job		269		269	
4" x 8"	Demolish	L.F.		1		1	Cost includes material and labor to install 4" x 8" ledger board nailed to the face of a rafter.
	Install	L.F.	12.70	4.10		16.80	
	Demolish and Install	L.F.	12.70	5.10		17.80	
	Reinstall	L.F.		3.28		3.28	
	Minimum Charge	Job		269		269	
Outriggers							
2" x 4"	Demolish	L.F.		.31		.31	Cost includes material and labor to install 2" x 4" outrigger rafters for flat, shed or gabled roofs, up to 5/12 slope, per L.F.
	Install	L.F.	.59	2.15		2.74	
	Demolish and Install	L.F.	.59	2.46		3.05	
	Reinstall	L.F.		1.72		1.72	
	Minimum Charge	Job		269		269	
2" x 6"	Demolish	L.F.		.47		.47	Cost includes material and labor to install 2" x 6" outrigger rafters for flat, shed or gabled roofs, up to 5/12 slope, per L.F.
	Install	L.F.	1.16	2.15		3.31	
	Demolish and Install	L.F.	1.16	2.62		3.78	
	Reinstall	L.F.		1.72		1.72	
	Minimum Charge	Job		269		269	
Lookout Rafter							
2" x 4"	Demolish	L.F.		1.04		1.04	Cost includes material and labor to install 2" x 4" lookout rafters for flat, shed or gabled roofs, up to 5/12 slope, per L.F.
	Install	L.F.	.59	.90		1.49	
	Demolish and Install	L.F.	.59	1.94		2.53	
	Reinstall	L.F.		.72		.72	
	Minimum Charge	Job		269		269	
2" x 6"	Demolish	L.F.		1.06		1.06	Cost includes material and labor to install 2" x 6" lookout rafters for flat, shed or gabled roofs, up to 5/12 slope, per L.F.
	Install	L.F.	1.16	.91		2.07	
	Demolish and Install	L.F.	1.16	1.97		3.13	
	Reinstall	L.F.		.73		.73	
	Minimum Charge	Job		269		269	
Fly Rafter							
2" x 4"	Demolish	L.F.		1.04		1.04	Cost includes material and labor to install 2" x 4" fly rafters for flat, shed or gabled roofs, up to 5/12 slope, per L.F.
	Install	L.F.	.59	.90		1.49	
	Demolish and Install	L.F.	.59	1.94		2.53	
	Reinstall	L.F.		.72		.72	
	Minimum Charge	Job		269		269	
2" x 6"	Demolish	L.F.		1.06		1.06	Cost includes material and labor to install 2" x 6" fly rafters for flat, shed or gabled roofs, up to 5/12 slope, per L.F.
	Install	L.F.	1.11	.91		2.02	
	Demolish and Install	L.F.	1.11	1.97		3.08	
	Reinstall	L.F.		.73		.73	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Residential Trusses		Unit	Material	Labor	Equip.	Total	Specification
W or Fink Truss							
24' Span							
	Demolish	Ea.		42	43.50	85.50	Includes material, labor and equipment to install wood gang-nailed residential truss, up to 24' span.
	Install	Ea.	112	41	43.50	196.50	
	Demolish and Install	Ea.	112	83	87	282	
	Reinstall	Ea.		41.12	43.26	84.38	
	Minimum Charge	Job		269		269	
28' Span							
	Demolish	Ea.		44.50	46.50	91	Includes material, labor and equipment to install wood gang-nailed residential truss, up to 28' span.
	Install	Ea.	134	46.50	49	229.50	
	Demolish and Install	Ea.	134	91	95.50	320.50	
	Reinstall	Ea.		46.55	48.97	95.52	
	Minimum Charge	Job		269		269	
32' Span							
	Demolish	Ea.		49.50	51.50	101	Includes material, labor and equipment to install wood gang-nailed residential truss, up to 32' span.
	Install	Ea.	249	49.50	52	350.50	
	Demolish and Install	Ea.	249	99	103.50	451.50	
	Reinstall	Ea.		49.34	51.91	101.25	
	Minimum Charge	Job		269		269	
36' Span							
	Demolish	Ea.		53.50	55.50	109	Includes material, labor and equipment to install wood gang-nailed residential truss, up to 36' span.
	Install	Ea.	187	53.50	56.50	297	
	Demolish and Install	Ea.	187	107	112	406	
	Reinstall	Ea.		53.63	56.43	110.06	
	Minimum Charge	Job		269		269	
Gable End							
24' Span							
	Demolish	Ea.		42	43.50	85.50	Includes material, labor and equipment to install wood gang-nailed residential gable end truss, up to 24' span.
	Install	Ea.	89.50	44	46.50	180	
	Demolish and Install	Ea.	89.50	86	90	265.50	
	Reinstall	Ea.		44.06	46.35	90.41	
	Clean	Ea.	1.36	54		55.36	
	Paint	Ea.	9.15	59		68.15	
	Minimum Charge	Job		269		269	
28' Span							
	Demolish	Ea.		44.50	46.50	91	Includes material, labor and equipment to install wood gang-nailed residential gable end truss, up to 30' span.
	Install	Ea.	167	52.50	55	274.50	
	Demolish and Install	Ea.	167	97	101.50	365.50	
	Reinstall	Ea.		52.49	55.23	107.72	
	Clean	Ea.	1.42	73.50		74.92	
	Paint	Ea.	9.50	80		89.50	
	Minimum Charge	Job		269		269	
32' Span							
	Demolish	Ea.		49.50	51.50	101	Includes material, labor and equipment to install wood gang-nailed residential gable end truss, up to 32' span.
	Install	Ea.	250	53.50	56.50	360	
	Demolish and Install	Ea.	250	103	108	461	
	Reinstall	Ea.		53.63	56.43	110.06	
	Clean	Ea.	1.49	96.50		97.99	
	Paint	Ea.	9.95	105		114.95	
	Minimum Charge	Job		269		269	
36' Span							
	Demolish	Ea.		53.50	55.50	109	Includes material, labor and equipment to install wood gang-nailed residential gable end truss, up to 36' span.
	Install	Ea.	340	61.50	65	466.50	
	Demolish and Install	Ea.	340	115	120.50	575.50	
	Reinstall	Ea.		61.68	64.89	126.57	
	Clean	Ea.	1.56	122		123.56	
	Paint	Ea.	10.40	132		142.40	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Residential Trusses		Unit	Material	Labor	Equip.	Total	Specification
Truss Hardware							
5-1/4" Glue-Lam Seat	Install	Ea.	55	2.99		57.99	Includes labor and material to install beam hangers.
	Minimum Charge	Job		269		269	
6-3/4" Glue-Lam Seat	Install	Ea.	77.50	2.99		80.49	Includes labor and material to install beam hangers.
	Minimum Charge	Job		269		269	
2" x 4" Joist Hanger	Install	Ea.	1	3.07		4.07	Includes labor and material to install joist and beam hangers.
	Minimum Charge	Job		269		269	
2" x 12" Joist Hanger	Install	Ea.	1.75	3.26		5.01	Cost includes labor and material to install 2" x 12" joist hanger.
	Minimum Charge	Job		269		269	
Commercial Trusses		Unit	Material	Labor	Equip.	Total	Specification
Engineered Lumber, Truss / Joist							
9-1/2"	Demolish	S.F.		.74		.74	Includes material and labor to install engineered lumber truss / joists per S.F. of floor area based on joists 16" O.C. Beams, supports and bridging are not included.
	Install	S.F.	3.18	.54		3.72	
	Demolish and Install	S.F.	3.18	1.28		4.46	
	Reinstall	S.F.		.43		.43	
	Minimum Charge	Job		269		269	
11-7/8"	Demolish	S.F.		.77		.77	Includes material and labor to install engineered lumber truss / joists per S.F. of floor area based on joists 16" O.C. Beams, supports and bridging are not included.
	Install	S.F.	.07	.55		.62	
	Demolish and Install	S.F.	.07	1.32		1.39	
	Reinstall	S.F.		.44		.44	
	Minimum Charge	Job		269		269	
14"	Demolish	S.F.		.79		.79	Includes material and labor to install engineered lumber truss / joists per S.F. of floor area based on joists 16" O.C. Beams, supports and bridging are not included.
	Install	S.F.	3.99	.59		4.58	
	Demolish and Install	S.F.	3.99	1.38		5.37	
	Reinstall	S.F.		.47		.47	
	Minimum Charge	Job		269		269	
16"	Demolish	S.F.		.82		.82	Includes material and labor to install engineered lumber truss / joists per S.F. of floor area based on joists 16" O.C. Beams, supports and bridging are not included.
	Install	S.F.	6	.62		6.62	
	Demolish and Install	S.F.	6	1.44		7.44	
	Reinstall	S.F.		.50		.50	
	Minimum Charge	Job		269		269	
Bowstring Truss							
100' Clear Span	Demolish	SF Flr.		.76	.89	1.65	Includes material, labor and equipment to install bow string truss system up to 100' clear span per S.F. of floor area.
	Install	SF Flr.	14.75	.62	.74	16.11	
	Demolish and Install	SF Flr.	14.75	1.38	1.63	17.76	
	Minimum Charge	Job		269		269	
120' Clear Span	Demolish	SF Flr.		.84	.99	1.83	Includes material, labor and equipment to install bow string truss system up to 120' clear span per S.F. of floor area.
	Install	SF Flr.	15.70	.69	.83	17.22	
	Demolish and Install	SF Flr.	15.70	1.53	1.82	19.05	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Roof Sheathing		Unit	Material	Labor	Equip.	Total	Specification
Plywood							
3/8"							
	Demolish	S.F.		.59		.59	Cost includes material and labor to install 3/8" CDX plywood roof sheathing.
	Install	S.F.	.77	.71		1.48	
	Demolish and Install	S.F.	.77	1.30		2.07	
	Reinstall	S.F.		.71		.71	
	Minimum Charge	Job		269		269	
1/2"							
	Demolish	S.F.		.59		.59	Cost includes material and labor to install 1/2" CDX plywood roof sheathing.
	Install	S.F.	.98	.77		1.75	
	Demolish and Install	S.F.	.98	1.36		2.34	
	Minimum Charge	Job		269		269	
5/8"							
	Demolish	S.F.		.59		.59	Cost includes material and labor to install 5/8" CDX plywood roof sheathing.
	Install	S.F.	1.82	.83		2.65	
	Demolish and Install	S.F.	1.82	1.42		3.24	
	Minimum Charge	Job		269		269	
3/4"							
	Demolish	S.F.		.59		.59	Cost includes material and labor to install 3/4" CDX plywood roof sheathing.
	Install	S.F.	1.23	.90		2.13	
	Demolish and Install	S.F.	1.23	1.49		2.72	
	Minimum Charge	Job		269		269	
OSB							
1/2"							
	Demolish	S.F.		.59		.59	Cost includes material and labor to install 4' x 8' x 1/2" OSB sheathing.
	Install	S.F.	.59	.77		1.36	
	Demolish and Install	S.F.	.59	1.36		1.95	
	Minimum Charge	Job		269		269	
5/8"							
	Demolish	S.F.		.59		.59	Cost includes material and labor to install 4' x 8' x 5/8" OSB sheathing.
	Install	S.F.	.59	.62		1.21	
	Demolish and Install	S.F.	.59	1.21		1.80	
	Minimum Charge	Job		269		269	
Plank							
	Demolish	S.F.		.59		.59	Cost includes material and labor to install 1" x 6" or 1" x 8" utility T&G board sheathing laid diagonal.
	Install	S.F.	1.40	1.48		2.88	
	Demolish and Install	S.F.	1.40	2.07		3.47	
	Reinstall	S.F.		1.48		1.48	
	Minimum Charge	Job		269		269	
Skip-type							
1" x 4"							
	Demolish	S.F.		.90		.90	Includes material and labor to install sheathing board material 1" x 4", 7" O.C.
	Install	S.F.	1	.45		1.45	
	Demolish and Install	S.F.	1	1.35		2.35	
	Minimum Charge	Job		269		269	
1" x 6"							
	Demolish	S.F.		.90		.90	Includes material and labor to install sheathing board material 1" x 6", 7" or 9" O.C.
	Install	S.F.	1.31	.37		1.68	
	Demolish and Install	S.F.	1.31	1.27		2.58	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Wood Deck		Unit	Material	Labor	Equip.	Total	Specification
Stairs							
	Demolish	Ea.		530		530	Includes material and labor to install wood steps. 5 - 7 risers included.
	Install	Ea.	193	950		1143	
	Demolish and Install	Ea.	193	1480		1673	
	Reinstall	Ea.		759.55		759.55	
	Clean	Flight	3.27	35		38.27	
	Paint	Flight	38	59		97	
	Minimum Charge	Job		269		269	
Bench Seating							
	Demolish	L.F.		7.50		7.50	Includes material and labor to install pressure treated bench seating.
	Install	L.F.	3.33	27		30.33	
	Demolish and Install	L.F.	3.33	34.50		37.83	
	Reinstall	L.F.		21.50		21.50	
	Clean	L.F.	.13	2.02		2.15	
	Paint	L.F.	1.30	3.53		4.83	
	Minimum Charge	Job		269		269	
Privacy Wall							
	Demolish	SF Flr.		1.80		1.80	Includes material, labor and equipment to install privacy wall.
	Install	SF Flr.	1.91	.99	.40	3.30	
	Demolish and Install	SF Flr.	1.91	2.79	.40	5.10	
	Reinstall	SF Flr.		.79	.32	1.11	
	Clean	SF Flr.	.07	.42		.49	
	Paint	S.F.	.13	.34		.47	
	Minimum Charge	Job		269		269	
Treated Column or Post							
4" x 4"							
	Demolish	L.F.		1.12		1.12	Includes material and labor to install 4" x 4" treated column or post.
	Install	L.F.	1.68	2.76		4.44	
	Demolish and Install	L.F.	1.68	3.88		5.56	
	Reinstall	L.F.		2.21		2.21	
	Clean	L.F.	.11	.36		.47	
	Paint	L.F.	.40	1.10		1.50	
	Minimum Charge	Job		269		269	
4" x 6"							
	Demolish	L.F.		1.64		1.64	Includes material and labor to install 4" x 6" treated column or post.
	Install	L.F.	4.29	3.91		8.20	
	Demolish and Install	L.F.	4.29	5.55		9.84	
	Reinstall	L.F.		3.13		3.13	
	Clean	L.F.	.15	.51		.66	
	Paint	L.F.	.40	1.10		1.50	
	Minimum Charge	Job		269		269	
Cedar Columns or Posts							
4" x 4"							
	Demolish	L.F.		1.12		1.12	Includes material and labor to install 4" x 4" cedar columns or posts.
	Install	L.F.	9.20	2.76		11.96	
	Demolish and Install	L.F.	9.20	3.88		13.08	
	Reinstall	L.F.		2.21		2.21	
	Clean	L.F.	.11	.36		.47	
	Paint	L.F.	.40	1.10		1.50	
	Minimum Charge	Job		269		269	
4" x 6"							
	Demolish	L.F.		1.64		1.64	Includes material and labor to install 4" x 6" cedar columns or posts.
	Install	L.F.	27.50	3.91		31.41	
	Demolish and Install	L.F.	27.50	5.55		33.05	
	Reinstall	L.F.		3.13		3.13	
	Clean	L.F.	.15	.51		.66	
	Paint	L.F.	.40	1.10		1.50	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Wood Deck		Unit	Material	Labor	Equip.	Total	Specification
Redwood Columns or Posts							
4" x 4"							
	Demolish	L.F.		1.12		1.12	Includes material and labor to install 4" x 4" redwood columns or posts.
	Install	L.F.	14.95	2.76		17.71	
	Demolish and Install	L.F.	14.95	3.88		18.83	
	Reinstall	L.F.		2.21		2.21	
	Clean	L.F.	.11	.36		.47	
	Paint	L.F.	.40	1.10		1.50	
	Minimum Charge	Job		269		269	
4" x 6"							
	Demolish	L.F.		1.64		1.64	Includes material and labor to install 4" x 6" redwood columns or posts.
	Install	L.F.	18.35	3.91		22.26	
	Demolish and Install	L.F.	18.35	5.55		23.90	
	Reinstall	L.F.		3.13		3.13	
	Clean	L.F.	.15	.51		.66	
	Paint	L.F.	.40	1.10		1.50	
	Minimum Charge	Job		269		269	
Treated Girder - Single							
4" x 8"							
	Demolish	L.F.		3.34		3.34	Includes material and labor to install a treated lumber girder consisting of one 4" x 8" for porch or deck construction.
	Install	L.F.	5.45	2.05		7.50	
	Demolish and Install	L.F.	5.45	5.39		10.84	
	Reinstall	L.F.		1.64		1.64	
	Clean	L.F.	.13	.43		.56	
	Minimum Charge	Job		269		269	
Treated Girder - Double							
2" x 8"							
	Demolish	L.F.		3.34		3.34	Includes material and labor to install a treated lumber girder consisting of two 2" x 8"s for porch or deck construction.
	Install	L.F.	3.36	1.87		5.23	
	Demolish and Install	L.F.	3.36	5.21		8.57	
	Reinstall	L.F.		1.50		1.50	
	Clean	L.F.	.13	.43		.56	
	Minimum Charge	Job		269		269	
2" x 10"							
	Demolish	L.F.		4.18		4.18	Includes material and labor to install a treated lumber girder consisting of two 2" x 10"s for porch or deck construction.
	Install	L.F.	4.66	1.95		6.61	
	Demolish and Install	L.F.	4.66	6.13		10.79	
	Reinstall	L.F.		1.56		1.56	
	Clean	L.F.	.15	.51		.66	
	Minimum Charge	Job		269		269	
2" x 12"							
	Demolish	L.F.		5		5	Includes material and labor to install a treated lumber girder consisting of two 2" x 12"s for porch or deck construction.
	Install	L.F.	6.95	2.05		9	
	Demolish and Install	L.F.	6.95	7.05		14	
	Reinstall	L.F.		1.64		1.64	
	Clean	L.F.	.18	.58		.76	
	Minimum Charge	Job		269		269	
Treated Girder - Triple							
2" x 8"							
	Demolish	L.F.		5		5	Includes material and labor to install a treated lumber girder consisting of three 2" x 8"s for porch or deck construction.
	Install	L.F.	5.05	2.05		7.10	
	Demolish and Install	L.F.	5.05	7.05		12.10	
	Reinstall	L.F.		1.64		1.64	
	Clean	L.F.	.15	.51		.66	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Wood Deck		Unit	Material	Labor	Equip.	Total	Specification
2" x 10"							
	Demolish	L.F.		6.25		6.25	Includes material and labor to install a treated lumber girder consisting of three 2" x 10"s for porch or deck construction.
	Install	L.F.	7	2.15		9.15	
	Demolish and Install	L.F.	7	8.40		15.40	
	Reinstall	L.F.		1.72		1.72	
	Clean	L.F.	.18	.58		.76	
	Minimum Charge	Job		269		269	
2" x 12"							
	Demolish	L.F.		7.45		7.45	Includes material and labor to install a treated lumber girder consisting of three 2" x 12"s for porch or deck construction.
	Install	L.F.	10.35	2.26		12.61	
	Demolish and Install	L.F.	10.35	9.71		20.06	
	Reinstall	L.F.		1.81		1.81	
	Clean	L.F.	.19	.65		.84	
	Minimum Charge	Job		269		269	
Treated Ledger - Bolted							
2" x 8"							
	Demolish	L.F.		.56		.56	Includes material and labor to install a treated lumber 2" x 8" ledger with carriage bolts 4' on center for porch or deck construction.
	Install	L.F.	1.82	2.76		4.58	
	Demolish and Install	L.F.	1.82	3.32		5.14	
	Reinstall	L.F.		2.21		2.21	
	Clean	L.F.	.02	.29		.31	
	Minimum Charge	Job		269		269	
2" x 10"							
	Demolish	L.F.		.56		.56	Includes material and labor to install a treated lumber 2" x 10" ledger with carriage bolts 4' on center for porch or deck construction.
	Install	L.F.	2.44	2.79		5.23	
	Demolish and Install	L.F.	2.44	3.35		5.79	
	Reinstall	L.F.		2.23		2.23	
	Clean	L.F.	.03	.34		.37	
	Minimum Charge	Job		269		269	
2" x 12"							
	Demolish	L.F.		.56		.56	Includes material and labor to install a treated lumber 2" x 12" ledger with carriage bolts 4' on center for porch or deck construction.
	Install	L.F.	3.53	2.83		6.36	
	Demolish and Install	L.F.	3.53	3.39		6.92	
	Reinstall	L.F.		2.26		2.26	
	Clean	L.F.	.03	.34		.37	
	Minimum Charge	Job		269		269	
Treated Joists							
2" x 8"							
	Demolish	L.F.		.96		.96	Includes material and labor to install treated lumber 2" x 8" deck or floor joists for porch or deck construction.
	Install	L.F.	1.65	.98		2.63	
	Demolish and Install	L.F.	1.65	1.94		3.59	
	Reinstall	L.F.		.78		.78	
	Clean	L.F.	.11	.36		.47	
	Minimum Charge	Job		269		269	
2" x 10"							
	Demolish	L.F.		.99		.99	Includes material and labor to install treated lumber 2" x 10" deck or floor joists for porch or deck construction.
	Install	L.F.	2.30	1.19		3.49	
	Demolish and Install	L.F.	2.30	2.18		4.48	
	Reinstall	L.F.		.96		.96	
	Clean	L.F.	.13	.43		.56	
	Minimum Charge	Job		269		269	
2" x 12"							
	Demolish	L.F.		1.02		1.02	Includes material and labor to install treated lumber 2" x 12" deck or floor joists for porch or deck construction.
	Install	L.F.	2.76	1.23		3.99	
	Demolish and Install	L.F.	2.76	2.25		5.01	
	Reinstall	L.F.		.98		.98	
	Clean	L.F.	.15	.51		.66	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Wood Deck		Unit	Material	Labor	Equip.	Total	Specification
Treated Railings and Trim							
2" x 2"							
Demolish	L.F.			.37		.37	Includes material and labor to install treated lumber 2" x 2" railings and trim for porch or deck construction.
Install	L.F.		.72	1.79		2.51	
Demolish and Install	L.F.		.72	2.16		2.88	
Reinstall	L.F.			1.43		1.43	
Clean	L.F.		.01	.27		.28	
Paint	L.F.		.40	1.10		1.50	
Minimum Charge	Job			269		269	
2" x 4"							
Demolish	L.F.			.37		.37	Includes material and labor to install treated lumber 2" x 4" railings and trim for porch or deck construction.
Install	L.F.		.77	1.79		2.56	
Demolish and Install	L.F.		.77	2.16		2.93	
Reinstall	L.F.			1.43		1.43	
Clean	L.F.		.02	.29		.31	
Paint	L.F.		.40	1.10		1.50	
Minimum Charge	Job			269		269	
2" x 6"							
Demolish	L.F.			.37		.37	Includes material and labor to install treated lumber 2" x 6" railings and trim for porch or deck construction.
Install	L.F.		1.31	1.79		3.10	
Demolish and Install	L.F.		1.31	2.16		3.47	
Reinstall	L.F.			1.43		1.43	
Clean	L.F.		.02	.34		.36	
Paint	L.F.		.40	1.10		1.50	
Minimum Charge	Job			269		269	
Cedar Railings and Trim							
1" x 4"							
Demolish	L.F.			.37		.37	Includes material and labor to install cedar 1" x 4" railings and trim for porch or deck construction.
Install	L.F.		1.77	1.79		3.56	
Demolish and Install	L.F.		1.77	2.16		3.93	
Reinstall	L.F.			1.43		1.43	
Clean	L.F.		.01	.27		.28	
Paint	L.F.		.40	1.10		1.50	
Minimum Charge	Job			269		269	
2" x 4"							
Demolish	L.F.			.37		.37	Includes material and labor to install cedar 2" x 4" railings and trim for porch or deck construction.
Install	L.F.		11.40	1.79		13.19	
Demolish and Install	L.F.		11.40	2.16		13.56	
Reinstall	L.F.			1.43		1.43	
Clean	L.F.		.02	.29		.31	
Paint	L.F.		.40	1.10		1.50	
Minimum Charge	Job			269		269	
2" x 6"							
Demolish	L.F.			.37		.37	Includes material and labor to install cedar 2" x 6" railings and trim for porch or deck construction.
Install	L.F.		11.35	1.79		13.14	
Demolish and Install	L.F.		11.35	2.16		13.51	
Reinstall	L.F.			1.43		1.43	
Clean	L.F.		.02	.34		.36	
Paint	L.F.		.40	1.10		1.50	
Minimum Charge	Job			269		269	
Redwood Railings and Trim							
1" x 4"							
Demolish	L.F.			.37		.37	Includes material and labor to install redwood 1" x 4" railings and trim for porch or deck construction.
Install	L.F.		4.50	1.79		6.29	
Demolish and Install	L.F.		4.50	2.16		6.66	
Reinstall	L.F.			1.43		1.43	
Clean	L.F.		.01	.27		.28	
Paint	L.F.		.40	1.10		1.50	
Minimum Charge	Job			269		269	

Rough Frame / Structure

Wood Deck		Unit	Material	Labor	Equip.	Total	Specification
2" x 6"							
	Demolish	L.F.		.37		.37	Includes material and labor to install redwood 2" x 6" railings and trim for porch or deck construction.
	Install	L.F.	28	1.79		29.79	
	Demolish and Install	L.F.	28	2.16		30.16	
	Reinstall	L.F.		1.43		1.43	
	Clean	L.F.	.02	.34		.36	
	Paint	L.F.	.40	1.10		1.50	
	Minimum Charge	Job		269		269	
Treated Decking							
1" x 4"							
	Demolish	L.F.		.54		.54	Includes material and labor to install treated lumber 1" x 4" decking for porch or deck construction.
	Install	S.F.	2.21	1.95		4.16	
	Demolish and Install	S.F.	2.21	2.49		4.70	
	Reinstall	S.F.		1.56		1.56	
	Clean	S.F.	.07	.42		.49	
	Paint	S.F.	.44	.88		1.32	
	Minimum Charge	Job		269		269	
2" x 4"							
	Demolish	L.F.		.54		.54	Includes material and labor to install treated lumber 2" x 4" decking for porch or deck construction.
	Install	S.F.	2.56	1.79		4.35	
	Demolish and Install	S.F.	2.56	2.33		4.89	
	Reinstall	S.F.		1.43		1.43	
	Clean	S.F.	.07	.42		.49	
	Paint	S.F.	.44	.88		1.32	
	Minimum Charge	Job		269		269	
2" x 6"							
	Demolish	L.F.		.54		.54	Includes material and labor to install treated lumber 2" x 6" decking for porch or deck construction.
	Install	S.F.	2.79	1.68		4.47	
	Demolish and Install	S.F.	2.79	2.22		5.01	
	Reinstall	S.F.		1.34		1.34	
	Clean	S.F.	.07	.42		.49	
	Paint	S.F.	.44	.88		1.32	
	Minimum Charge	Job		269		269	
5/4" x 6"							
	Demolish	L.F.		.54		.54	Includes material and labor to install treated lumber 5/4" x 6" decking for porch or deck construction.
	Install	S.F.	2.35	1.68		4.03	
	Demolish and Install	S.F.	2.35	2.22		4.57	
	Reinstall	S.F.		1.34		1.34	
	Clean	S.F.	.07	.42		.49	
	Paint	S.F.	.44	.88		1.32	
	Minimum Charge	Job		269		269	
Wood / Plastic Composite Decking							
5/4" x 6"							
	Demolish	L.F.		.54		.54	Includes material and labor to install wood/plastic composite 5/4" x 6" decking for porch or deck construction.
	Install	L.F.	2.57	1.68		4.25	
	Demolish and Install	L.F.	2.57	2.22		4.79	
	Reinstall	L.F.		1.34		1.34	
	Clean	S.F.	.07	.42		.49	
	Paint	S.F.	.44	.88		1.32	
	Minimum Charge	Job		269		269	
Square Edge Fir Decking							
1" x 4"							
	Demolish	L.F.		.54		.54	Includes material and labor to install square edge fir 1" x 4" decking for porch or deck construction.
	Install	L.F.	2.24	1.95		4.19	
	Demolish and Install	L.F.	2.24	2.49		4.73	
	Reinstall	L.F.		1.56		1.56	
	Clean	S.F.	.07	.42		.49	
	Paint	S.F.	.44	.88		1.32	
	Minimum Charge	Job		269		269	



Rough Frame / Structure

Wood Deck		Unit	Material	Labor	Equip.	Total	Specification
Tongue and Groove Fir Decking							
1" x 4"							
	Demolish	L.F.		.54		.54	Includes material and labor to install treated lumber 1" x 4" decking for porch or deck construction.
	Install	L.F.	1.87	2.39		4.26	
	Demolish and Install	L.F.	1.87	2.93		4.80	
	Reinstall	L.F.		1.91		1.91	
	Clean	S.F.	.07	.42		.49	
	Paint	S.F.	.44	.88		1.32	
	Minimum Charge	Job		269		269	
Mahogany Decking							
1" x 4"							
	Demolish	L.F.		.54		.54	Includes material and labor to install treated lumber 1" x 4" decking for porch or deck construction.
	Install	L.F.	2.89	1.95		4.84	
	Demolish and Install	L.F.	2.89	2.49		5.38	
	Reinstall	L.F.		1.56		1.56	
	Clean	S.F.	.07	.42		.49	
	Paint	S.F.	.44	.88		1.32	
	Minimum Charge	Job		269		269	
PVC Decking							
5/4" x 6"							
	Demolish	L.F.		.54		.54	Includes material and labor to install PVC 5/4" x 6" decking for porch or deck construction.
	Install	L.F.	6.60	1.95		8.55	
	Demolish and Install	L.F.	6.60	2.49		9.09	
	Reinstall	L.F.		1.56		1.56	
	Clean	S.F.	.07	.42		.49	
	Minimum Charge	Job		269		269	
PVC Handrails and Balusters							
Straight							
	Demolish	L.F.		3.75		3.75	Includes material and labor to install straight PVC handrails and balusters for porch or deck construction.
	Install	L.F.	25	5.60		30.60	
	Demolish and Install	L.F.	25	9.35		34.35	
	Reinstall	L.F.		4.48		4.48	
	Clean	L.F.	.65	3.16		3.81	
	Minimum Charge	Job		269		269	
Angled							
	Demolish	L.F.		3.75		3.75	Includes material and labor to install angled PVC handrails and balusters for porch or deck construction.
	Install	L.F.	25.50	7.45		32.95	
	Demolish and Install	L.F.	25.50	11.20		36.70	
	Reinstall	L.F.		5.97		5.97	
	Clean	L.F.	.65	3.16		3.81	
	Minimum Charge	Job		269		269	
PVC Post Sleeve							
for 4" x 4" post							
	Demolish	L.F.		1.12		1.12	Includes material and labor to install PVC post sleeves over 4" x 4" porch or deck posts.
	Install	L.F.	19.05	5.60		24.65	
	Demolish and Install	L.F.	19.05	6.72		25.77	
	Reinstall	L.F.		4.48		4.48	
	Clean	L.F.	.11	.36		.47	
	Minimum Charge	Job		269		269	
Post Cap							
	Demolish	Ea.		5.60		5.60	Includes material and labor to install PVC post caps for porch or deck construction.
	Install	Ea.	37	11.20		48.20	
	Demolish and Install	Ea.	37	16.80		53.80	
	Reinstall	Ea.		8.96		8.96	
	Clean	L.F.	.11	.36		.47	
	Minimum Charge	Job		269		269	

Rough Frame / Structure

Porch		Unit	Material	Labor	Equip.	Total	Specification
Stairs	Demolish	Ea.		530		530	Includes material and labor to install wood steps. 5 - 7 risers included.
	Install	Ea.	193	950		1143	
	Demolish and Install	Ea.	193	1480		1673	
	Reinstall	Ea.		759.55		759.55	
	Clean	Flight	3.27	35		38.27	
	Paint	Flight	38	59		97	
	Minimum Charge	Job		269		269	
Bench Seating	Demolish	L.F.		7.50		7.50	Includes material and labor to install pressure treated bench seating.
	Install	L.F.	3.33	27		30.33	
	Demolish and Install	L.F.	3.33	34.50		37.83	
	Reinstall	L.F.		21.50		21.50	
	Clean	L.F.	.13	2.02		2.15	
	Paint	L.F.	1.30	3.53		4.83	
	Minimum Charge	Job		269		269	
Privacy Wall	Demolish	SF Flr.		1.80		1.80	Includes material, labor and equipment to install privacy wall.
	Install	SF Flr.	1.91	.99	.40	3.30	
	Demolish and Install	SF Flr.	1.91	2.79	.40	5.10	
	Reinstall	SF Flr.		.79	.32	1.11	
	Clean	SF Flr.	.07	.42		.49	
	Paint	S.F.	.13	.34		.47	
	Minimum Charge	Job		269		269	
Wood Board Ceiling	Demolish	S.F.		.75		.75	Includes material and labor to install wood board on ceiling.
	Install	S.F.	1.90	2.39		4.29	
	Demolish and Install	S.F.	1.90	3.14		5.04	
	Clean	S.F.	.02	.24		.26	
	Paint	S.F.	.43	.55		.98	
	Minimum Charge	Job		269		269	
Re-screen	Install	S.F.	5.50	2.15		7.65	Includes labor and material to re-screen wood frame.
	Minimum Charge	Job		269		269	

Exterior Trim



Exterior Trim

Exterior Trim		Unit	Material	Labor	Equip.	Total	Specification
Stock Lumber							
1" x 2"							
	Demolish	L.F.		.37		.37	Cost includes material and labor to install 1" x 2" pine trim.
	Install	L.F.	.30	1.63		1.93	
	Demolish and Install	L.F.	.30	2		2.30	
	Clean	L.F.	.01	.27		.28	
	Paint	L.F.	.06	.69		.75	
	Minimum Charge	Job		269		269	
1" x 3"							
	Demolish	L.F.		.37		.37	Cost includes material and labor to install 1" x 3" pine trim.
	Install	L.F.	.42	1.85		2.27	
	Demolish and Install	L.F.	.42	2.22		2.64	
	Clean	L.F.	.01	.27		.28	
	Paint	L.F.	.06	.69		.75	
	Minimum Charge	Job		269		269	
1" x 4"							
	Demolish	L.F.		.37		.37	Cost includes material and labor to install 1" x 4" pine trim.
	Install	L.F.	.87	2.15		3.02	
	Demolish and Install	L.F.	.87	2.52		3.39	
	Clean	L.F.	.01	.27		.28	
	Paint	L.F.	.06	.69		.75	
	Minimum Charge	Job		269		269	
1" x 6"							
	Demolish	L.F.		.37		.37	Cost includes material and labor to install 1" x 6" pine trim.
	Install	L.F.	1.39	2.15		3.54	
	Demolish and Install	L.F.	1.39	2.52		3.91	
	Clean	L.F.	.01	.27		.28	
	Paint	L.F.	.19	.69		.88	
	Minimum Charge	Job		269		269	
1" x 8"							
	Demolish	L.F.		.41		.41	Cost includes material and labor to install 1" x 8" pine trim.
	Install	L.F.	.95	2.69		3.64	
	Demolish and Install	L.F.	.95	3.10		4.05	
	Reinstall	L.F.		2.15		2.15	
	Clean	L.F.	.02	.29		.31	
	Paint	L.F.	.19	.69		.88	
	Minimum Charge	Job		269		269	

Exterior Trim

Exterior Trim		Unit	Material	Labor	Equip.	Total	Specification
Stock Lumber							
1" x 10"							
	Demolish	L.F.		.62		.62	Cost includes material and labor to install 1" x 10" pine trim.
	Install	L.F.	1.03	2.99		4.02	
	Demolish and Install	L.F.	1.03	3.61		4.64	
	Minimum Charge	Job		269		269	
1" x 12"							
	Demolish	L.F.		.62		.62	Cost includes material and labor to install 1" x 12" pine trim.
	Install	L.F.	2.79	2.99		5.78	
	Demolish and Install	L.F.	2.79	3.61		6.40	
	Minimum Charge	Job		269		269	
PVC							
1" x 4"							
	Demolish	L.F.		.37		.37	Includes material and labor to install 1" x 4" PVC exterior trim.
	Install	L.F.	2.42	2.15		4.57	
	Demolish and Install	L.F.	2.42	2.52		4.94	
	Reinstall	L.F.		1.72		1.72	
	Clean	L.F.	.01	.27		.28	
	Paint	L.F.	.06	.69		.75	
	Minimum Charge	Job		269		269	
1" x 6"							
	Demolish	L.F.		.37		.37	Includes material and labor to install 1" x 6" PVC exterior trim.
	Install	L.F.	3.51	2.15		5.66	
	Demolish and Install	L.F.	3.51	2.52		6.03	
	Reinstall	L.F.		1.72		1.72	
	Clean	L.F.	.01	.27		.28	
	Paint	L.F.	.19	.69		.88	
	Minimum Charge	Job		269		269	
1" x 8"							
	Demolish	L.F.		.41		.41	Includes material and labor to install 1" x 8" PVC exterior trim.
	Install	L.F.	4.50	2.39		6.89	
	Demolish and Install	L.F.	4.50	2.80		7.30	
	Reinstall	L.F.		1.91		1.91	
	Clean	L.F.	.02	.29		.31	
	Paint	L.F.	.19	.69		.88	
	Minimum Charge	Job		269		269	
1" x 10"							
	Demolish	L.F.		.43		.43	Includes material and labor to install 1" x 10" PVC exterior trim.
	Install	L.F.	4.24	2.39		6.63	
	Demolish and Install	L.F.	4.24	2.82		7.06	
	Reinstall	L.F.		1.91		1.91	
	Clean	L.F.	.03	.34		.37	
	Paint	L.F.	.19	.69		.88	
	Minimum Charge	Job		269		269	
1" x 12"							
	Demolish	L.F.		.45		.45	Includes material and labor to install 1" x 12" PVC exterior trim.
	Install	L.F.	7.30	2.69		9.99	
	Demolish and Install	L.F.	7.30	3.14		10.44	
	Reinstall	L.F.		2.15		2.15	
	Clean	L.F.	.03	.34		.37	
	Paint	L.F.	.19	.69		.88	
	Minimum Charge	Job		269		269	

Exterior Trim

Fascia		Unit	Material	Labor	Equip.	Total	Specification
Aluminum	Demolish	L.F.		.78		.78	Includes material and labor to install aluminum fascia.
	Install	S.F.	3.23	2.56		5.79	
	Demolish and Install	S.F.	3.23	3.34		6.57	
	Reinstall	S.F.		2.05		2.05	
	Clean	L.F.		.51		.51	
	Minimum Charge	Job		269		269	
Vinyl	Demolish	L.F.		.78		.78	Cost includes material and labor to install 6" vinyl fascia with 12" vinyl soffit and J-channel.
	Install	L.F.	1.96	3.07		5.03	
	Demolish and Install	L.F.	1.96	3.85		5.81	
	Reinstall	L.F.		2.46		2.46	
	Clean	L.F.		.51		.51	
	Minimum Charge	Job		269		269	
Plywood	Demolish	L.F.		.78		.78	Cost includes material and labor to install 12" wide plywood fascia.
	Install	L.F.	2.07	1.19		3.26	
	Demolish and Install	L.F.	2.07	1.97		4.04	
	Reinstall	L.F.		.96		.96	
	Clean	L.F.	.03	.34		.37	
	Paint	L.F.	.40	1.10		1.50	
Cedar	Minimum Charge	Job		269		269	Cost includes material and labor to install 12" wide cedar fascia.
	Demolish	L.F.		.78		.78	
	Install	L.F.	7.50	1.19		8.69	
	Demolish and Install	L.F.	7.50	1.97		9.47	
	Reinstall	L.F.		.96		.96	
	Clean	L.F.	.03	.34		.37	
Redwood	Paint	L.F.	.40	1.10		1.50	Cost includes material and labor to install 1" x 6" redwood fascia board.
	Minimum Charge	Job		269		269	
	Demolish	L.F.		.60		.60	
	Install	L.F.	6.60	2.15		8.75	
	Demolish and Install	L.F.	6.60	2.75		9.35	
	Reinstall	L.F.		1.72		1.72	
1" x 6"	Minimum Charge	Job		269		269	Cost includes material and labor to install 1" x 8" redwood fascia board.
	Demolish	L.F.		.68		.68	
	Install	L.F.	7.35	2.34		9.69	
	Demolish and Install	L.F.	7.35	3.02		10.37	
	Reinstall	L.F.		1.87		1.87	
	Minimum Charge	Job		269		269	
1" x 8"	Demolish	L.F.		.60		.60	Cost includes material and labor to install 2" x 6" exterior trim board.
	Install	L.F.	1.16	4.30		5.46	
	Demolish and Install	L.F.	1.16	4.90		6.06	
	Reinstall	L.F.		3.44		3.44	
	Minimum Charge	Job		269		269	
	Demolish	L.F.		.68		.68	Cost includes material and labor to install 2" x 8" exterior trim board.
2" x 6"	Install	L.F.	1.53	4.78		6.31	
	Demolish and Install	L.F.	1.53	5.46		6.99	
	Reinstall	L.F.		3.82		3.82	
	Minimum Charge	Job		269		269	
	Demolish	L.F.		.68		.68	
	Install	L.F.	1.53	4.78		6.31	
2" x 8"	Demolish and Install	L.F.	1.53	5.46		6.99	Cost includes material and labor to install 2" x 8" exterior trim board.
	Reinstall	L.F.		3.82		3.82	
	Minimum Charge	Job		269		269	
	Demolish	L.F.		.68		.68	
	Install	L.F.	1.53	4.78		6.31	
	Demolish and Install	L.F.	1.53	5.46		6.99	
2" x 8"	Reinstall	L.F.		3.82		3.82	Cost includes material and labor to install 2" x 8" exterior trim board.
	Minimum Charge	Job		269		269	
	Demolish	L.F.		.68		.68	
	Install	L.F.	1.53	4.78		6.31	
	Demolish and Install	L.F.	1.53	5.46		6.99	
	Reinstall	L.F.		3.82		3.82	

Exterior Trim

Fascia		Unit	Material	Labor	Equip.	Total	Specification
Hem-fir Std & Better							
2" x 6"							
	Demolish	L.F.		.60		.60	Cost includes material and labor to install 2" x 6" exterior trim board.
	Install	L.F.	1.16	4.30		5.46	
	Demolish and Install	L.F.	1.16	4.90		6.06	
	Reinstall	L.F.		3.44		3.44	
	Clean	L.F.	.02	.34		.36	
	Paint	L.F.	.40	1.10		1.50	
	Minimum Charge	Job		269		269	
2" x 8"							
	Demolish	L.F.		.68		.68	Cost includes material and labor to install 2" x 8" exterior trim board.
	Install	L.F.	1.53	4.78		6.31	
	Demolish and Install	L.F.	1.53	5.46		6.99	
	Reinstall	L.F.		3.82		3.82	
	Clean	L.F.	.02	.34		.36	
	Paint	L.F.	.40	1.10		1.50	
	Minimum Charge	Job		269		269	
2" x 10"							
	Demolish	L.F.		.78		.78	Cost includes material and labor to install 2" x 10" exterior trim board.
	Install	L.F.	2.08	5.95		8.03	
	Demolish and Install	L.F.	2.08	6.73		8.81	
	Reinstall	L.F.		4.78		4.78	
	Clean	L.F.	.03	.37		.40	
	Paint	L.F.	.40	1.10		1.50	
	Minimum Charge	Job		269		269	
Barge Rafter							
2" x 6"							
	Demolish	L.F.		1.20		1.20	Cost includes material and labor to install 2" x 6" barge rafters.
	Install	L.F.	1.16	.60		1.76	
	Demolish and Install	L.F.	1.16	1.80		2.96	
	Reinstall	L.F.		.48		.48	
	Clean	L.F.	.02	.34		.36	
	Paint	L.F.	.40	1.10		1.50	
	Minimum Charge	Job		269		269	
2" x 8"							
	Demolish	L.F.		1.22		1.22	Cost includes material and labor to install 2" x 8" barge rafters.
	Install	L.F.	1.53	.63		2.16	
	Demolish and Install	L.F.	1.53	1.85		3.38	
	Reinstall	L.F.		.51		.51	
	Clean	L.F.	.02	.34		.36	
	Paint	L.F.	.40	1.10		1.50	
	Minimum Charge	Job		269		269	
2" x 10"							
	Demolish	L.F.		1.24		1.24	Cost includes material and labor to install 2" x 10" barge rafters.
	Install	L.F.	2.08	.65		2.73	
	Demolish and Install	L.F.	2.08	1.89		3.97	
	Reinstall	L.F.		.52		.52	
	Clean	L.F.	.03	.37		.40	
	Paint	L.F.	.40	1.10		1.50	
	Minimum Charge	Job		269		269	



Exterior Trim

Soffit		Unit	Material	Labor	Equip.	Total	Specification
Aluminum							
12" w / Fascia							
	Demolish	L.F.		.78		.78	Cost includes material and labor to install 12" aluminum soffit with 6" fascia and J-channel.
	Install	L.F.	2.52	3.07		5.59	
	Demolish and Install	L.F.	2.52	3.85		6.37	
	Reinstall	L.F.		2.46		2.46	
	Clean	L.F.		.51		.51	
	Paint	L.F.	.51	1.10		1.61	
	Minimum Charge	Job		269		269	
18" w / Fascia							
	Demolish	L.F.		.78		.78	Cost includes material and labor to install 18" aluminum soffit with 6" fascia and J-channel.
	Install	L.F.	4.68	3.58		8.26	
	Demolish and Install	L.F.	4.68	4.36		9.04	
	Reinstall	L.F.		2.87		2.87	
	Clean	L.F.		.51		.51	
	Paint	L.F.	.51	1.10		1.61	
	Minimum Charge	Job		269		269	
24" w / Fascia							
	Demolish	L.F.		.78		.78	Cost includes material and labor to install 24" aluminum soffit with 6" fascia and J-channel.
	Install	L.F.	4.21	3.98		8.19	
	Demolish and Install	L.F.	4.21	4.76		8.97	
	Reinstall	L.F.		3.19		3.19	
	Clean	L.F.		.74		.74	
	Paint	L.F.	.51	1.10		1.61	
	Minimum Charge	Job		269		269	
Vinyl							
	Demolish	L.F.		.78		.78	Cost includes material and labor to install 6" vinyl fascia with 12" vinyl soffit and J-channel.
	Install	L.F.	1.96	3.07		5.03	
	Demolish and Install	L.F.	1.96	3.85		5.81	
	Reinstall	L.F.		2.46		2.46	
	Clean	L.F.		.51		.51	
	Paint	L.F.	.51	1.10		1.61	
	Minimum Charge	Job		269		269	
Plywood							
	Demolish	L.F.		.86		.86	Cost includes material and labor to install 12" wide plywood soffit.
	Install	L.F.	1.96	1.54		3.50	
	Demolish and Install	L.F.	1.96	2.40		4.36	
	Reinstall	L.F.		1.23		1.23	
	Clean	L.F.	.03	.34		.37	
	Paint	L.F.	.40	1.10		1.50	
	Minimum Charge	Job		269		269	
Redwood							
	Demolish	L.F.		.86		.86	Cost includes material and labor to install 12" wide redwood soffit.
	Install	L.F.	8.55	1.54		10.09	
	Demolish and Install	L.F.	8.55	2.40		10.95	
	Reinstall	L.F.		1.23		1.23	
	Clean	L.F.	.03	.34		.37	
	Paint	L.F.	.40	1.10		1.50	
	Minimum Charge	Job		269		269	
Cedar							
	Demolish	L.F.		.86		.86	Cost includes material and labor to install 12" wide cedar soffit.
	Install	L.F.	7.35	1.54		8.89	
	Demolish and Install	L.F.	7.35	2.40		9.75	
	Reinstall	L.F.		1.23		1.23	
	Clean	L.F.	.03	.34		.37	
	Paint	L.F.	.40	1.10		1.50	
	Minimum Charge	Job		269		269	

Exterior Trim

Soffit		Unit	Material	Labor	Equip.	Total	Specification
Douglas Fir							
	Demolish	L.F.		.86		.86	Cost includes material and labor to install 12" wide Douglas fir soffit.
	Install	L.F.	2.67	1.54		4.21	
	Demolish and Install	L.F.	2.67	2.40		5.07	
	Reinstall	L.F.		1.23		1.23	
	Clean	L.F.	.03	.34		.37	
	Paint	L.F.	.40	1.10		1.50	
	Minimum Charge	Job		269		269	

Roofing



Roofing and Flashing

Tile Roofing

Metal Flashing		Unit	Material	Labor	Equip.	Total	Specification
Galvanized	6"	Demolish	L.F.	.30		.30	Includes material and labor to install flat galvanized steel flashing, 6" wide.
		Install	L.F.	.91		2.16	
		Demolish and Install	L.F.	.91		2.46	
		Paint	L.F.	.28		.83	
		Minimum Charge	Job	250		250	
14"		Demolish	L.F.	.30		.30	Includes material and labor to install flat galvanized steel flashing, 14" wide.
		Install	L.F.	2.11		3.36	
		Demolish and Install	L.F.	2.11		3.66	
		Paint	L.F.	.28		.83	
		Minimum Charge	Job	250		250	
20"		Demolish	L.F.	.30		.30	Includes material and labor to install flat galvanized steel flashing, 20" wide.
		Install	L.F.	3.14		4.39	
		Demolish and Install	L.F.	3.14		4.69	
		Paint	L.F.	.28		.83	
		Minimum Charge	Job	250		250	
Aluminum	6"	Demolish	L.F.	.30		.30	Includes material and labor to install flat aluminum flashing, 6" wide.
		Install	L.F.	1.25		2.50	
		Demolish and Install	L.F.	1.25		2.80	
		Paint	L.F.	.28		.83	
		Minimum Charge	Job	250		250	
14"		Demolish	L.F.	.30		.30	Includes material and labor to install flat aluminum flashing, 14" wide.
		Install	L.F.	1.35		2.60	
		Demolish and Install	L.F.	1.35		2.90	
		Paint	L.F.	.28		.83	
		Minimum Charge	Job	250		250	
20"		Demolish	L.F.	.30		.30	Includes material and labor to install flat aluminum flashing, 20" wide.
		Install	L.F.	1.54		2.79	
		Demolish and Install	L.F.	1.54		3.09	
		Paint	L.F.	.28		.83	
		Minimum Charge	Job	250		250	

Roofing

Metal Flashing		Unit	Material	Labor	Equip.	Total	Specification
Copper							
6"							
	Demolish	L.F.		.30		.30	Includes material and labor to install flat copper flashing, 6" wide.
	Install	L.F.	10.30	1.67		11.97	
	Demolish and Install	L.F.	10.30	1.97		12.27	
	Minimum Charge	Job		295		295	
14"							
	Demolish	L.F.		.30		.30	Includes material and labor to install flat copper flashing, 14" wide.
	Install	L.F.	24	1.67		25.67	
	Demolish and Install	L.F.	24	1.97		25.97	
	Minimum Charge	Job		295		295	
18"							
	Demolish	L.F.		.30		.30	Includes material and labor to install flat copper flashing, 18" wide.
	Install	L.F.	34	1.67		35.67	
	Demolish and Install	L.F.	34	1.97		35.97	
	Minimum Charge	Job		295		295	
Aluminum Valley							
	Demolish	L.F.		.30		.30	Includes material and labor to install aluminum valley flashing, .024" thick.
	Install	L.F.	6.15	3.16		9.31	
	Demolish and Install	L.F.	6.15	3.46		9.61	
	Paint	L.F.	.28	.55		.83	
	Minimum Charge	Job		269		269	
Gravel Stop							
	Demolish	L.F.		.47		.47	Includes material and labor to install aluminum gravel stop, .050" thick, 4" high, mill finish.
	Install	L.F.	6.10	4.07		10.17	
	Demolish and Install	L.F.	6.10	4.54		10.64	
	Reinstall	L.F.		3.25		3.25	
	Paint	L.F.	.43	.55		.98	
	Minimum Charge	Job		269		269	
Drip Edge							
	Demolish	L.F.		.45		.45	Includes material and labor to install aluminum drip edge, .016" thick, 5" wide, mill finish.
	Install	L.F.	1.06	1.34		2.40	
	Demolish and Install	L.F.	1.06	1.79		2.85	
	Reinstall	L.F.		1.08		1.08	
	Paint	L.F.	.43	.55		.98	
	Minimum Charge	Job		269		269	
End Wall							
	Demolish	L.F.		1.38		1.38	Includes material and labor to install aluminum end wall flashing, .024" thick.
	Install	L.F.	2.20	3.16		5.36	
	Demolish and Install	L.F.	2.20	4.54		6.74	
	Minimum Charge	Job		269		269	
Side Wall							
	Demolish	L.F.		.27		.27	Includes material and labor to install aluminum side wall flashing, .024" thick.
	Install	L.F.	4.16	3.16		7.32	
	Demolish and Install	L.F.	4.16	3.43		7.59	
	Minimum Charge	Job		269		269	
Coping and Wall Cap							
	Demolish	L.F.		1.87		1.87	Includes material and labor to install aluminum flashing, mill finish, 0.40 thick, 12" wide.
	Install	L.F.	9.15	3.45		12.60	
	Demolish and Install	L.F.	9.15	5.32		14.47	
	Clean	L.F.	.08	1.27		1.35	
	Minimum Charge	Job		250		250	

Roofing

Roof Shingles		Unit	Material	Labor	Equip.	Total	Specification
Underlayment							
15#	Demolish	Sq.		15		15	Includes material and labor to install #15 felt underlayment.
	Install	Sq.	8.70	7.80		16.50	
	Demolish and Install	Sq.	8.70	22.80		31.50	
	Minimum Charge	Job		250		250	
30#	Demolish	Sq.		15		15	Includes material and labor to install #30 felt underlayment.
	Install	Sq.	16.15	8.60		24.75	
	Demolish and Install	Sq.	16.15	23.60		39.75	
	Minimum Charge	Job		250		250	
Self Adhering							
	Demolish	Sq.		37.50		37.50	Includes material and labor to install self adhering ice barrier roofing underlayment.
	Install	Sq.	90	22.50		112.50	
	Demolish and Install	Sq.	90	60		150	
	Minimum Charge	Job		250		250	
Rolled Roofing		Unit	Material	Labor	Equip.	Total	Specification
90 lb	Demolish	Sq.		37.50		37.50	Cost includes material and labor to install 90 lb mineral surface rolled roofing.
	Install	Sq.	61.50	41.50		103	
	Demolish and Install	Sq.	61.50	79		140.50	
	Minimum Charge	Job		250		250	
Composition Shingles		Unit	Material	Labor	Equip.	Total	Specification
Fiberglass (3-tab)							
25 Year	Demolish	Sq.		41		41	Cost includes material and labor to install 25 year fiberglass shingles.
	Install	Sq.	115	55.50		170.50	
	Demolish and Install	Sq.	115	96.50		211.50	
	Minimum Charge	Job		250		250	
30 Year	Demolish	Sq.		41		41	Cost includes material and labor to install 30 year fiberglass shingles.
	Install	Sq.	121	62.50		183.50	
	Demolish and Install	Sq.	121	103.50		224.50	
	Minimum Charge	Job		250		250	
Emergency Repairs							
	Install	Ea.	229	250		479	Includes labor and material for emergency repairs.
	Minimum Charge	Job		250		250	
Architectural							
Laminated, 25 Year	Demolish	Sq.		41		41	Cost includes material and labor to install 25 year fiberglass roof shingles.
	Install	Sq.	152	69.50		221.50	
	Demolish and Install	Sq.	152	110.50		262.50	
	Minimum Charge	Job		250		250	
Laminated, 30 Year	Demolish	Sq.		41		41	Cost includes material and labor to install 30 year laminated roof shingles.
	Install	Sq.	166	89.50		255.50	
	Demolish and Install	Sq.	166	130.50		296.50	
	Minimum Charge	Job		250		250	

Roofing

Composition Shingles		Unit	Material	Labor	Equip.	Total	Specification
Laminated, 40 Year							
	Demolish	Sq.		41		41	Cost includes material and labor to install 40 year laminated roof shingles.
	Install	Sq.	455	104		559	
	Demolish and Install	Sq.	455	145		600	
	Minimum Charge	Job		250		250	
Laminated Shake, 40 Year							
	Demolish	Sq.		41		41	Cost includes material and labor to install 40 year laminated roof shingles.
	Install	Sq.	455	104		559	
	Demolish and Install	Sq.	455	145		600	
	Minimum Charge	Job		250		250	
Emergency Repairs							
	Install	Ea.	229	250		479	Includes labor and material for emergency repairs.
	Minimum Charge	Job		250		250	
Roof Jack							
	Demolish	Ea.		8.20		8.20	Includes material and labor to install residential roof jack, w/bird screen, backdraft damper, 3" & 4" dia. round duct.
	Install	Ea.	34.50	53.50		88	
	Demolish and Install	Ea.	34.50	61.70		96.20	
	Paint	Ea.	.14	5.50		5.64	
	Minimum Charge	Job		325		325	
Ridge Vent							
	Demolish	L.F.		1.45		1.45	Includes material and labor to install a mill finish aluminum ridge vent strip.
	Install	L.F.	4.64	3.80		8.44	
	Demolish and Install	L.F.	4.64	5.25		9.89	
	Minimum Charge	Job		269		269	
Shingle Molding							
1" x 2"							
	Demolish	L.F.		.28		.28	Cost includes material and labor to install 1" x 2" pine trim.
	Install	L.F.	.30	1.63		1.93	
	Demolish and Install	L.F.	.30	1.91		2.21	
	Paint	L.F.	.06	.69		.75	
	Minimum Charge	Job		269		269	
1" x 3"							
	Demolish	L.F.		.28		.28	Cost includes material and labor to install 1" x 3" pine trim.
	Install	L.F.	.42	1.85		2.27	
	Demolish and Install	L.F.	.42	2.13		2.55	
	Paint	L.F.	.06	.69		.75	
	Minimum Charge	Job		269		269	
1" x 4"							
	Demolish	L.F.		.28		.28	Cost includes material and labor to install 1" x 4" pine trim.
	Install	L.F.	.87	2.15		3.02	
	Demolish and Install	L.F.	.87	2.43		3.30	
	Paint	L.F.	.06	.69		.75	
	Minimum Charge	Job		269		269	
Add for Steep Pitch							
	Install	Sq.		31.50		31.50	Includes labor and material added for 2nd story or steep roofs.
Add for Additional Story							
	Install	Sq.		31.50		31.50	Includes labor and material added for 2nd story or steep roofs.

Roofing

Wood Shingles		Unit	Material	Labor	Equip.	Total	Specification
Cedar Wood Shingles							
16" Red Label (#2)							
	Demolish	Sq.		100		100	Includes material and labor to install wood shingles/shakes.
	Install	Sq.	615	215		830	
	Demolish and Install	Sq.	615	315		930	
	Minimum Charge	Job		269		269	
16" Blue Label (#1)							
	Demolish	Sq.		100		100	Includes material and labor to install wood shingles/shakes.
	Install	Sq.	535	165		700	
	Demolish and Install	Sq.	535	265		800	
	Minimum Charge	Job		269		269	
18" Red Label (#2)							
	Demolish	Sq.		100		100	Includes material and labor to install wood shingles/shakes.
	Install	Sq.	750	138		888	
	Demolish and Install	Sq.	750	238		988	
	Minimum Charge	Job		269		269	
18" Blue Label (#1)							
	Demolish	Sq.		100		100	Includes material and labor to install wood shingles/shakes.
	Install	Sq.	1425	151		1576	
	Demolish and Install	Sq.	1425	251		1676	
	Minimum Charge	Job		269		269	
Replace Shingle							
	Install	Ea.	9.95	13.45		23.40	Includes labor and material to replace individual wood shingle/shake. Cost is per shingle.
	Minimum Charge	Job		269		269	
Cedar Shake							
18" Medium Handsplit							
	Demolish	Sq.		100		100	Includes material and labor to install wood shingles/shakes.
	Install	Sq.	555	207		762	
	Demolish and Install	Sq.	555	307		862	
	Minimum Charge	Job		269		269	
18" Heavy Handsplit							
	Demolish	Sq.		100		100	Includes material and labor to install wood shingles/shakes.
	Install	Sq.	555	230		785	
	Demolish and Install	Sq.	555	330		885	
	Minimum Charge	Job		269		269	
24" Heavy Handsplit							
	Demolish	Sq.		100		100	Includes material and labor to install wood shingles/shakes.
	Install	Sq.	875	184		1059	
	Demolish and Install	Sq.	875	284		1159	
	Minimum Charge	Job		269		269	
24" Medium Handsplit							
	Demolish	Sq.		100		100	Includes material and labor to install wood shingles/shakes.
	Install	Sq.	875	165		1040	
	Demolish and Install	Sq.	875	265		1140	
	Minimum Charge	Job		269		269	
24" Straight Split							
	Demolish	Sq.		100		100	Includes material and labor to install wood shingles/shakes.
	Install	Sq.	1400	244		1644	
	Demolish and Install	Sq.	1400	344		1744	
	Minimum Charge	Job		269		269	
24" Tapersplit							
	Demolish	Sq.		100		100	Includes material and labor to install wood shingles/shakes.
	Install	Sq.	750	244		994	
	Demolish and Install	Sq.	750	344		1094	
	Minimum Charge	Job		269		269	

Roofing

Wood Shingles		Unit	Material	Labor	Equip.	Total	Specification
18" Straight Split	Demolish	Sq.		100		100	Includes material and labor to install wood shingles/shakes.
	Install	Sq.	530	244		774	
	Demolish and Install	Sq.	530	344		874	
	Minimum Charge	Job		269		269	
Replace Shingle	Install	Ea.	9.95	13.45		23.40	Includes labor and material to replace individual wood shingle/shake. Cost is per shingle.
	Minimum Charge	Job		269		269	

Slate Tile Roofing		Unit	Material	Labor	Equip.	Total	Specification
Unfading Green	Demolish	Sq.		90		90	Includes material and labor to install clear Vermont slate tile.
	Install	Sq.	980	286		1266	
	Demolish and Install	Sq.	980	376		1356	
	Reinstall	Sq.		228.57		228.57	
	Minimum Charge	Job		250		250	
Unfading Purple	Demolish	Sq.		90		90	Includes material and labor to install clear Vermont slate tile.
	Install	Sq.	1025	286		1311	
	Demolish and Install	Sq.	1025	376		1401	
	Reinstall	Sq.		228.57		228.57	
	Minimum Charge	Job		250		250	
Replace Slate Tiles	Install	Ea.	10.25	26.50		36.75	Includes labor and material to replace individual slate tiles. Cost is per tile.
	Minimum Charge	Job		250		250	
Variegated Purple	Demolish	Sq.		90		90	Includes material and labor to install clear Vermont slate tile.
	Install	Sq.	1025	286		1311	
	Demolish and Install	Sq.	1025	376		1401	
	Reinstall	Sq.		228.57		228.57	
	Minimum Charge	Job		250		250	
Unfading Grey / Black	Demolish	Sq.		90		90	Includes material and labor to install clear Vermont slate tile.
	Install	Sq.	925	286		1211	
	Demolish and Install	Sq.	925	376		1301	
	Reinstall	Sq.		228.57		228.57	
	Minimum Charge	Job		250		250	
Unfading Red	Demolish	Sq.		90		90	Includes material and labor to install clear Vermont slate tile.
	Install	Sq.	1600	286		1886	
	Demolish and Install	Sq.	1600	376		1976	
	Reinstall	Sq.		228.57		228.57	
	Minimum Charge	Job		250		250	
Weathering Black	Demolish	Sq.		90		90	Includes material and labor to install clear Pennsylvania slate tile.
	Install	Sq.	715	286		1001	
	Demolish and Install	Sq.	715	376		1091	
	Reinstall	Sq.		228.57		228.57	
	Minimum Charge	Job		250		250	
Weathering Green	Demolish	Sq.		90		90	Includes material and labor to install clear Vermont slate tile.
	Install	Sq.	925	286		1211	
	Demolish and Install	Sq.	925	376		1301	
	Reinstall	Sq.		228.57		228.57	
	Minimum Charge	Job		250		250	

Roofing

Flat Clay Tile Roofing		Unit	Material	Labor	Equip.	Total	Specification
Glazed	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost based on terra cotta red flat clay tile and includes ridge and rake tiles.
	Install	Sq.	310	250		560	
	Demolish and Install	Sq.	310	350		660	
	Reinstall	Sq.		200		200	
	Minimum Charge	Job		250		250	
Terra Cotta Red	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost based on terra cotta red flat clay tile and includes ridge and rake tiles.
	Install	Sq.	310	250		560	
	Demolish and Install	Sq.	310	350		660	
	Reinstall	Sq.		200		200	
	Minimum Charge	Job		250		250	
Mission Tile Roofing		Unit	Material	Labor	Equip.	Total	Specification
Glazed Red	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost based on glazed red tile and includes birdstop, ridge and rake tiles.
	Install	Sq.	625	273		898	
	Demolish and Install	Sq.	625	373		998	
	Reinstall	Sq.		218.18		218.18	
	Minimum Charge	Job		250		250	
Unglazed Red	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost based on unglazed red tile and includes birdstop, ridge and rake tiles.
	Install	Sq.	485	273		758	
	Demolish and Install	Sq.	485	373		858	
	Reinstall	Sq.		218.18		218.18	
	Minimum Charge	Job		250		250	
Glazed Blue	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost based on glazed blue tile and includes birdstop, ridge and rake tiles.
	Install	Sq.	415	273		688	
	Demolish and Install	Sq.	415	373		788	
	Reinstall	Sq.		218.18		218.18	
	Minimum Charge	Job		250		250	
Glazed White	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost based on glazed white tile and includes birdstop, ridge and rake tiles.
	Install	Sq.	420	273		693	
	Demolish and Install	Sq.	420	373		793	
	Reinstall	Sq.		218.18		218.18	
	Minimum Charge	Job		250		250	
Unglazed White	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost based on unglazed white tile and includes birdstop, ridge and rake tiles.
	Install	Sq.	295	273		568	
	Demolish and Install	Sq.	295	373		668	
	Reinstall	Sq.		218.18		218.18	
	Minimum Charge	Job		250		250	
Color Blend	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost based on color blend tile and includes birdstop, ridge and rake tiles.
	Install	Sq.	299	273		572	
	Demolish and Install	Sq.	299	373		672	
	Reinstall	Sq.		218.18		218.18	
	Minimum Charge	Job		250		250	

Roofing

Mission Tile Roofing		Unit	Material	Labor	Equip.	Total	Specification
Accessories / Extras							
Add for Cap Furring Strips	Install	Sq.	100	315		415	Includes labor and material to install vertically placed wood furring strips under cap tiles.
Add for Tile Adhesive	Install	Sq.	21.50	18.25		39.75	Includes material and labor for adhesive material placed between tiles.
Add for Wire Attachment	Install	Sq.	15.20	217		232.20	Includes labor and material to install single wire anchors for attaching tile.
Add for Braided Runners	Install	Sq.	37	208		245	Includes labor and material to install braided wire runners for secure attachment in high wind areas.
Add for Stainless Steel Nails	Install	Sq.	23.50			23.50	Includes material only for stainless steel nails.
Add for Brass Nails	Install	Sq.	42.50			42.50	Includes material only for brass nails.
Add for Hurricane Clips	Install	Sq.	23.50	294		317.50	Includes material and labor for hurricane or wind clips for high wind areas.
Add for Copper Nails	Install	Sq.	42.50			42.50	Includes material only for copper nails.
Add for Vertical Furring Strips	Install	Sq.	19.95	58		77.95	Includes labor and material to install vertically placed wood furring strips under tiles.
Add for Horizontal Furring Strips	Install	Sq.	13.80	26		39.80	Includes labor and material to install horizontally placed wood furring strips under tiles.

Spanish Tile Roofing		Unit	Material	Labor	Equip.	Total	Specification
Glazed Red							
	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost based on glazed red tile and includes birdstop, ridge and rake tiles.
	Install	Sq.	615	208		823	
	Demolish and Install	Sq.	615	308		923	
	Reinstall	Sq.		166.67		166.67	
	Minimum Charge	Job		250		250	
Glazed White							
	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost based on glazed white tile and includes birdstop, ridge and rake tiles.
	Install	Sq.	350	278		628	
	Demolish and Install	Sq.	350	378		728	
	Reinstall	Sq.		222.22		222.22	
	Minimum Charge	Job		250		250	

Roofing

Spanish Tile Roofing		Unit	Material	Labor	Equip.	Total	Specification
Glazed Blue							
	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost based on glazed blue tile and includes birdstop, ridge and rake tiles.
	Install	Sq.	13.20	208		221.20	
	Demolish and Install	Sq.	13.20	308		321.20	
	Reinstall	Sq.		166.67		166.67	
	Minimum Charge	Job		250		250	
Unglazed Red							
	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost based on unglazed red tile and includes birdstop, ridge and rake tiles.
	Install	Sq.	660	208		868	
	Demolish and Install	Sq.	660	308		968	
	Reinstall	Sq.		166.67		166.67	
	Minimum Charge	Job		250		250	
Unglazed White							
	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost based on unglazed white tile and includes birdstop, ridge and rake tiles.
	Install	Sq.	580	208		788	
	Demolish and Install	Sq.	580	308		888	
	Reinstall	Sq.		166.67		166.67	
	Minimum Charge	Job		250		250	
Color Blend							
	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost based on color blend tile and includes birdstop, ridge and rake tiles.
	Install	Sq.	705	208		913	
	Demolish and Install	Sq.	705	308		1013	
	Reinstall	Sq.		166.67		166.67	
	Minimum Charge	Job		250		250	
Accessories / Extras							
Add for Vertical Furring Strips							
	Install	Sq.	19.95	58		77.95	Includes labor and material to install vertically placed wood furring strips under tiles.
Add for Wire Attachment							
	Install	Sq.	7.55	167		174.55	Includes labor and material to install single wire ties.
Add for Braided Runners							
	Install	Sq.	28.50	143		171.50	Includes labor and material to install braided wire runners for secure attachment in high wind areas.
Add for Stainless Steel Nails							
	Install	Sq.	23			23	Includes material only for stainless steel nails.
Add for Copper Nails							
	Install	Sq.	36.50			36.50	Includes material only for copper nails.
Add for Brass Nails							
	Install	Sq.	32.50			32.50	Includes material only for brass nails.
Add for Hurricane Clips							
	Install	Sq.	11.85	172		183.85	Includes material and labor to install hurricane or wind clips for high wind areas.
Add for Mortar Set Tiles							
	Install	Sq.	53	250		303	Includes material and labor to install setting tiles by using mortar material placed between tiles.
Add for Tile Adhesive							
	Install	Sq.	14.10	16.25		30.35	Includes material and labor for adhesive placed between tiles.

Roofing

Spanish Tile Roofing		Unit	Material	Labor	Equip.	Total	Specification
Add for Cap Furring Strips	Install	Sq.	100	315		415	Includes labor and material to install vertically placed wood furring strips under cap tiles.
Add for Horizontal Furring Strips	Install	Sq.	13.80	26		39.80	

Concrete Tile Roofing		Unit	Material	Labor	Equip.	Total	Specification
Corrugated Red / Brown	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost includes birdstop, booster, ridge and rake tiles.
	Install	Sq.	28	370		398	
	Demolish and Install	Sq.	28	470		498	
	Reinstall	Sq.		296.30		296.30	
	Minimum Charge	Job		250		250	
Corrugated Gray	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost includes birdstop, booster, ridge and rake tiles.
	Install	Sq.	27.50	370		397.50	
	Demolish and Install	Sq.	27.50	470		497.50	
	Reinstall	Sq.		296.30		296.30	
	Minimum Charge	Job		250		250	
Corrugated Bright Red	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost includes birdstop, booster, ridge and rake tiles.
	Install	Sq.	27.50	370		397.50	
	Demolish and Install	Sq.	27.50	470		497.50	
	Reinstall	Sq.		296.30		296.30	
	Minimum Charge	Job		250		250	
Corrugated Black	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost includes birdstop, booster, ridge and rake tiles.
	Install	Sq.	27.50	370		397.50	
	Demolish and Install	Sq.	27.50	470		497.50	
	Reinstall	Sq.		296.30		296.30	
	Minimum Charge	Job		250		250	
Corrugated Green	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost includes birdstop, booster, ridge and rake tiles.
	Install	Sq.	27.50	370		397.50	
	Demolish and Install	Sq.	27.50	470		497.50	
	Reinstall	Sq.		296.30		296.30	
	Minimum Charge	Job		250		250	
Corrugated Blue	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost includes birdstop, booster, ridge and rake tiles.
	Install	Sq.	27.50	370		397.50	
	Demolish and Install	Sq.	27.50	470		497.50	
	Reinstall	Sq.		296.30		296.30	
	Minimum Charge	Job		250		250	
Flat Natural Gray	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost includes birdstop, booster, ridge and rake tiles.
	Install	Sq.	179	370		549	
	Demolish and Install	Sq.	179	470		649	
	Reinstall	Sq.		296.30		296.30	
	Minimum Charge	Job		250		250	

Roofing

Concrete Tile Roofing		Unit	Material	Labor	Equip.	Total	Specification
Flat Red / Brown							
	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost includes birdstop, booster, ridge and rake tiles.
	Install	Sq.	179	370		549	
	Demolish and Install	Sq.	179	470		649	
	Reinstall	Sq.		296.30		296.30	
	Minimum Charge	Job		250		250	
Flat Bright Red							
	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost includes birdstop, booster, ridge and rake tiles.
	Install	Sq.	179	370		549	
	Demolish and Install	Sq.	179	470		649	
	Reinstall	Sq.		296.30		296.30	
	Minimum Charge	Job		250		250	
Flat Green							
	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost includes birdstop, booster, ridge and rake tiles.
	Install	Sq.	179	370		549	
	Demolish and Install	Sq.	179	470		649	
	Minimum Charge	Job		250		250	
Flat Blue							
	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost includes birdstop, booster, ridge and rake tiles.
	Install	Sq.	179	370		549	
	Demolish and Install	Sq.	179	470		649	
	Reinstall	Sq.		296.30		296.30	
	Minimum Charge	Job		250		250	
Flat Black							
	Demolish	Sq.		100		100	Includes material and labor to install tile roofing. Cost includes birdstop, booster, ridge and rake tiles.
	Install	Sq.	179	370		549	
	Demolish and Install	Sq.	179	470		649	
	Reinstall	Sq.		296.30		296.30	
	Minimum Charge	Job		250		250	

Aluminum Sheet		Unit	Material	Labor	Equip.	Total	Specification
Corrugated							
.019" Thick Natural							
	Demolish	S.F.		1.06		1.06	Includes material and labor to install aluminum sheet metal roofing.
	Install	S.F.	1.53	2.46		3.99	
	Demolish and Install	S.F.	1.53	3.52		5.05	
	Reinstall	S.F.		1.97		1.97	
	Minimum Charge	Job		590		590	
.016" Thick Natural							
	Demolish	S.F.		1.06		1.06	Includes material and labor to install aluminum sheet metal roofing.
	Install	S.F.	3.03	2.46		5.49	
	Demolish and Install	S.F.	3.03	3.52		6.55	
	Reinstall	S.F.		1.97		1.97	
	Minimum Charge	Job		590		590	
.016" Colored Finish							
	Demolish	S.F.		1.06		1.06	Includes material and labor to install aluminum sheet metal roofing.
	Install	S.F.	1.11	2.46		3.57	
	Demolish and Install	S.F.	1.11	3.52		4.63	
	Reinstall	S.F.		1.97		1.97	
	Minimum Charge	Job		590		590	
.019" Colored Finish							
	Demolish	S.F.		1.06		1.06	Includes material and labor to install aluminum sheet metal roofing.
	Install	S.F.	.89	2.46		3.35	
	Demolish and Install	S.F.	.89	3.52		4.41	
	Reinstall	S.F.		1.97		1.97	
	Minimum Charge	Job		590		590	

Roofing

Aluminum Sheet

Ribbed

.019" Thick Natural

Demolish	S.F.		1.06	1.06	Includes material and labor to install aluminum sheet metal roofing.
Install	S.F.	1.53	2.46	3.99	
Demolish and Install	S.F.	1.53	3.52	5.05	
Reinstall	S.F.		1.97	1.97	
Minimum Charge	Job		590	590	

.016" Thick Natural

Demolish	S.F.		1.06	1.06	Includes material and labor to install aluminum sheet metal roofing.
Install	S.F.	3.03	2.46	5.49	
Demolish and Install	S.F.	3.03	3.52	6.55	
Reinstall	S.F.		1.97	1.97	
Minimum Charge	Job		590	590	

.050" Colored Finish

Demolish	S.F.		1.06	1.06	Includes material and labor to install aluminum sheet metal roofing.
Install	S.F.	5.65	2.46	8.11	
Demolish and Install	S.F.	5.65	3.52	9.17	
Reinstall	S.F.		1.97	1.97	
Minimum Charge	Job		590	590	

.032" Thick Natural

Demolish	S.F.		1.06	1.06	Includes material and labor to install aluminum sheet metal roofing.
Install	S.F.	3.15	2.46	5.61	
Demolish and Install	S.F.	3.15	3.52	6.67	
Reinstall	S.F.		1.97	1.97	
Minimum Charge	Job		590	590	

.040" Thick Natural

Demolish	S.F.		1.06	1.06	Includes material and labor to install aluminum sheet metal roofing.
Install	S.F.	4.59	2.46	7.05	
Demolish and Install	S.F.	4.59	3.52	8.11	
Reinstall	S.F.		1.97	1.97	
Minimum Charge	Job		590	590	

.050" Thick Natural

Demolish	S.F.		1.06	1.06	Includes material and labor to install aluminum sheet metal roofing.
Install	S.F.	4.71	2.46	7.17	
Demolish and Install	S.F.	4.71	3.52	8.23	
Reinstall	S.F.		1.97	1.97	
Minimum Charge	Job		590	590	

.016" Colored Finish

Demolish	S.F.		1.06	1.06	Includes material and labor to install aluminum sheet metal roofing.
Install	S.F.	1.11	2.46	3.57	
Demolish and Install	S.F.	1.11	3.52	4.63	
Reinstall	S.F.		1.97	1.97	
Minimum Charge	Job		590	590	

.019" Colored Finish

Demolish	S.F.		1.06	1.06	Includes material and labor to install aluminum sheet metal roofing.
Install	S.F.	.89	2.46	3.35	
Demolish and Install	S.F.	.89	3.52	4.41	
Reinstall	S.F.		1.97	1.97	
Minimum Charge	Job		590	590	

.032" Colored Finish

Demolish	S.F.		1.06	1.06	Includes material and labor to install aluminum sheet metal roofing.
Install	S.F.	6.35	2.46	8.81	
Demolish and Install	S.F.	6.35	3.52	9.87	
Reinstall	S.F.		1.97	1.97	
Minimum Charge	Job		590	590	

Roofing

Aluminum Sheet		Unit	Material	Labor	Equip.	Total	Specification
.040" Colored Finish							
	Demolish	S.F.		1.06		1.06	Includes material and labor to install aluminum sheet metal roofing.
	Install	S.F.	6.10	2.46		8.56	
	Demolish and Install	S.F.	6.10	3.52		9.62	
	Reinstall	S.F.		1.97		1.97	
	Minimum Charge	Job		590		590	
Fiberglass Sheet		Unit	Material	Labor	Equip.	Total	Specification
12 Ounce Corrugated							
	Demolish	S.F.		1.90		1.90	Cost includes material and labor to install 12 ounce corrugated fiberglass sheet roofing.
	Install	S.F.	8.20	1.99		10.19	
	Demolish and Install	S.F.	8.20	3.89		12.09	
	Reinstall	S.F.		1.59		1.59	
	Minimum Charge	Job		250		250	
8 Ounce Corrugated							
	Demolish	S.F.		1.90		1.90	Cost includes material and labor to install 8 ounce corrugated fiberglass roofing.
	Install	S.F.	2.84	1.99		4.83	
	Demolish and Install	S.F.	2.84	3.89		6.73	
	Reinstall	S.F.		1.59		1.59	
	Minimum Charge	Job		250		250	
Galvanized Steel		Unit	Material	Labor	Equip.	Total	Specification
Corrugated							
24 Gauge							
	Demolish	S.F.		1.06		1.06	Includes material and labor to install galvanized steel sheet metal roofing. Cost based on 24 gauge corrugated or ribbed steel roofing.
	Install	S.F.	16.85	2.09		18.94	
	Demolish and Install	S.F.	16.85	3.15		20	
	Reinstall	S.F.		1.67		1.67	
	Minimum Charge	Job		250		250	
26 Gauge							
	Demolish	S.F.		1.06		1.06	Includes material and labor to install galvanized steel sheet metal roofing. Cost based on 26 gauge corrugated or ribbed steel roofing.
	Install	S.F.	1.58	1.99		3.57	
	Demolish and Install	S.F.	1.58	3.05		4.63	
	Reinstall	S.F.		1.59		1.59	
	Minimum Charge	Job		250		250	
28 Gauge							
	Demolish	S.F.		1.06		1.06	Includes material and labor to install galvanized steel sheet metal roofing. Cost based on 28 gauge corrugated or ribbed steel roofing.
	Install	S.F.	.75	1.89		2.64	
	Demolish and Install	S.F.	.75	2.95		3.70	
	Reinstall	S.F.		1.52		1.52	
	Minimum Charge	Job		250		250	
30 Gauge							
	Demolish	S.F.		1.06		1.06	Includes material and labor to install galvanized steel sheet metal roofing. Cost based on 30 gauge corrugated or ribbed steel roofing.
	Install	S.F.	1.33	1.81		3.14	
	Demolish and Install	S.F.	1.33	2.87		4.20	
	Reinstall	S.F.		1.45		1.45	
	Minimum Charge	Job		250		250	

Roofing

Galvanized Steel		Unit	Material	Labor	Equip.	Total	Specification
Ribbed							
24 Gauge							
	Demolish	S.F.		1.06		1.06	Includes material and labor to install galvanized steel sheet metal roofing. Cost based on 24 gauge corrugated or ribbed steel roofing.
	Install	S.F.	16.85	2.09		18.94	
	Demolish and Install	S.F.	16.85	3.15		20	
	Reinstall	S.F.		1.67		1.67	
	Minimum Charge	Job		250		250	
26 Gauge							
	Demolish	S.F.		1.06		1.06	Includes material and labor to install galvanized steel sheet metal roofing. Cost based on 26 gauge corrugated or ribbed steel roofing.
	Install	S.F.	1.58	1.99		3.57	
	Demolish and Install	S.F.	1.58	3.05		4.63	
	Reinstall	S.F.		1.59		1.59	
	Minimum Charge	Job		250		250	
28 Gauge							
	Demolish	S.F.		1.06		1.06	Includes material and labor to install galvanized steel sheet metal roofing. Cost based on 28 gauge corrugated or ribbed steel roofing.
	Install	S.F.	.75	1.89		2.64	
	Demolish and Install	S.F.	.75	2.95		3.70	
	Reinstall	S.F.		1.52		1.52	
	Minimum Charge	Job		250		250	
30 Gauge							
	Demolish	S.F.		1.06		1.06	Includes material and labor to install galvanized steel sheet metal roofing. Cost based on 30 gauge corrugated or ribbed steel roofing.
	Install	S.F.	1.33	1.81		3.14	
	Demolish and Install	S.F.	1.33	2.87		4.20	
	Reinstall	S.F.		1.45		1.45	
	Minimum Charge	Job		250		250	
Standing Seam		Unit	Material	Labor	Equip.	Total	Specification
Copper							
16 Ounce							
	Demolish	Sq.		106		106	Includes material and labor to install copper standing seam metal roofing. Cost based on 16 ounce copper roofing.
	Install	Sq.	2550	455		3005	
	Demolish and Install	Sq.	2550	561		3111	
	Reinstall	Sq.		362.83		362.83	
	Minimum Charge	Job		295		295	
18 Ounce							
	Demolish	Sq.		106		106	Includes material and labor to install copper standing seam metal roofing. Cost based on 18 ounce copper roofing.
	Install	Sq.	2850	490		3340	
	Demolish and Install	Sq.	2850	596		3446	
	Reinstall	Sq.		393.07		393.07	
	Minimum Charge	Job		295		295	
20 Ounce							
	Demolish	Sq.		106		106	Includes material and labor to install copper standing seam metal roofing. Cost based on 20 ounce copper roofing.
	Install	Sq.	4200	535		4735	
	Demolish and Install	Sq.	4200	641		4841	
	Reinstall	Sq.		428.80		428.80	
	Minimum Charge	Job		295		295	
Stainless Steel							
26 Gauge							
	Demolish	Sq.		106		106	Cost includes material and labor to install 26 gauge stainless steel standing seam metal roofing.
	Install	Sq.	1525	515		2040	
	Demolish and Install	Sq.	1525	621		2146	
	Reinstall	Sq.		410.16		410.16	
	Minimum Charge	Job		295		295	

Roofing

Standing Seam		Unit	Material	Labor	Equip.	Total	Specification
28 Gauge							
	Demolish	Sq.		106		106	Includes material and labor to install standing seam metal roofing. Cost based on 28 gauge stainless steel roofing.
	Install	Sq.	31.50	490		521.50	
	Demolish and Install	Sq.	31.50	596		627.50	
	Reinstall	Sq.		393.07		393.07	
	Minimum Charge	Job		295		295	
Elastomeric Roofing		Unit	Material	Labor	Equip.	Total	Specification
Neoprene							
1/16"							
	Demolish	Sq.		36.50		36.50	Includes material and labor to install neoprene membrane, fully adhered, 1/16" thick.
	Install	Sq.	227	238	61.50	526.50	
	Demolish and Install	Sq.	227	274.50	61.50	563	
	Minimum Charge	Job		1150	116	1266	
GRM Membrane							
1/16"							
	Demolish	Sq.		36.50		36.50	Includes material and labor to install coal tar based elastomeric roofing membrane, polyester fiber reinforced.
	Install	Sq.	91.50	380	38.50	510	
	Demolish and Install	Sq.	91.50	416.50	38.50	546.50	
	Minimum Charge	Job		1150	116	1266	
Cant Strips							
3"							
	Demolish	L.F.		1.14		1.14	Includes material and labor to install cants 3" x 3", treated timber, cut diagonally.
	Install	L.F.	1.19	1.54		2.73	
	Demolish and Install	L.F.	1.19	2.68		3.87	
	Minimum Charge	Job		125		125	
4"							
	Demolish	L.F.		1.14		1.14	Includes material and labor to install cants 4" x 4", treated timber, cut diagonally.
	Install	L.F.	4.42	1.54		5.96	
	Demolish and Install	L.F.	4.42	2.68		7.10	
	Minimum Charge	Job		125		125	
Polyvinyl Chloride (PVC)							
45 mil (loose laid)							
	Demolish	Sq.		36.50		36.50	Cost includes material and labor to install 45 mil PVC elastomeric roofing, loose-laid with stone.
	Install	Sq.	128	44.50	4.54	177.04	
	Demolish and Install	Sq.	128	81	4.54	213.54	
	Minimum Charge	Job		1150	116	1266	
48 mil (loose laid)							
	Demolish	Sq.		36.50		36.50	Cost includes material and labor to install 48 mil PVC elastomeric roofing, loose-laid with stone.
	Install	Sq.	163	44.50	4.54	212.04	
	Demolish and Install	Sq.	163	81	4.54	248.54	
	Minimum Charge	Job		1150	116	1266	
60 mil (loose laid)							
	Demolish	Sq.		36.50		36.50	Cost includes material and labor to install 60 mil PVC elastomeric roofing, loose-laid with stone.
	Install	Sq.	430	44.50	4.54	479.04	
	Demolish and Install	Sq.	430	81	4.54	515.54	
	Minimum Charge	Job		1150	116	1266	
45 mil (attached)							
	Demolish	Sq.		58.50		58.50	Cost includes material and labor to install 45 mil PVC elastomeric roofing fully attached to roof deck.
	Install	Sq.	116	87.50	8.90	212.40	
	Demolish and Install	Sq.	116	146	8.90	270.90	
	Minimum Charge	Job		1150	116	1266	

Roofing

Elastomeric Roofing

48 mil (attached)

Demolish
Install
Demolish and Install
Minimum Charge

Sq.		58.50		58.50
Sq.	149	87.50	8.90	245.40
Sq.	149	146	8.90	303.90
Job		1150	116	1266

Cost includes material and labor to install 48 mil PVC elastomeric roofing fully attached to roof deck.

60 mil (attached)

Demolish
Install
Demolish and Install
Minimum Charge

Sq.		58.50		58.50
Sq.	415	87.50	8.90	511.40
Sq.	415	146	8.90	569.90
Job		1150	116	1266

Cost includes material and labor to install 60 mil PVC elastomeric roofing fully attached to roof deck.

CSPE Type

45 mil (loose laid w / stone)

Demolish
Install
Demolish and Install
Minimum Charge

Sq.		36.50		36.50
Sq.	282	87.50	8.90	378.40
Sq.	282	124	8.90	414.90
Job		1150	116	1266

Cost includes material and labor to install 45 mil CSPE (chlorosulfonated polyethylene-hypalon) roofing material loose laid on deck and ballasted with stone.

45 mil (attached at seams)

Demolish
Install
Demolish and Install
Minimum Charge

Sq.		44		44
Sq.	370	65	6.60	441.60
Sq.	370	109	6.60	485.60
Job		1150	116	1266

Cost includes material and labor to install 45 mil CSPE (chlorosulfonated polyethylene-hypalon) roofing material attached to deck at seams with batten strips.

45 mil (fully attached)

Demolish
Install
Demolish and Install
Minimum Charge

Sq.		58.50		58.50
Sq.	270	65	6.60	341.60
Sq.	270	123.50	6.60	400.10
Job		1150	116	1266

Cost includes material and labor to install 45 mil CSPE (chlorosulfonated polyethylene-hypalon) roofing material fully attached to deck.

EPDM Type

45 mil (attached at seams)

Demolish
Install
Demolish and Install
Minimum Charge

Sq.		44		44
Sq.	163	65	6.60	234.60
Sq.	163	109	6.60	278.60
Job		1150	116	1266

Cost includes material and labor to install 45 mil EPDM (ethylene propylene diene monomer) roofing material attached to deck at seams.

45 mil (fully attached)

Demolish
Install
Demolish and Install
Minimum Charge

Sq.		58.50		58.50
Sq.	149	87.50	8.90	245.40
Sq.	149	146	8.90	303.90
Job		1150	116	1266

Cost includes material and labor to install 45 mil EPDM (ethylene propylene diene monomer) roofing material fully attached to deck.

45 mil (loose laid w / stone)

Demolish
Install
Demolish and Install
Minimum Charge

Sq.		36.50		36.50
Sq.	160	44.50	4.54	209.04
Sq.	160	81	4.54	245.54
Job		1150	116	1266

Cost includes material and labor to install 45 mil EPDM (ethylene propylene diene monomer) roofing material loose laid on deck and ballasted with stones (approx. 1/2 ton of stone per square).

60 mil (attached at seams)

Demolish
Install
Demolish and Install
Minimum Charge

Sq.		44		44
Sq.	180	65	6.60	251.60
Sq.	180	109	6.60	295.60
Job		1150	116	1266

Cost includes material and labor to install 60 mil EPDM (ethylene propylene diene monomer) roofing material attached to deck at seams.

60 mil (fully attached)

Demolish
Install
Demolish and Install
Minimum Charge

Sq.		58.50		58.50
Sq.	166	87.50	8.90	262.40
Sq.	166	146	8.90	320.90
Job		1150	116	1266

Cost includes material and labor to install 60 mil EPDM (ethylene propylene diene monomer) roofing material fully attached to deck.

Roofing

Elastomeric Roofing		Unit	Material	Labor	Equip.	Total	Specification
60 mil (loose laid w / stone)							
	Demolish	Sq.		36.50		36.50	Cost includes material and labor to install 60 mil EPDM (ethylene propylene diene monomer) roofing material loose laid on deck and ballasted with stones (approx. 1/2 ton of stone per square).
	Install	Sq.	178	44.50	4.54	227.04	
	Demolish and Install	Sq.	178	81	4.54	263.54	
	Minimum Charge	Job		1150	116	1266	






Modified Bitumen Roofing		Unit	Material	Labor	Equip.	Total	Specification
Fully Attached							
120 mil							
	Demolish	Sq.		87.50		87.50	Cost includes material and labor to install 120 mil modified bitumen roofing, fully attached to deck by torch.
	Install	Sq.	73.50	11.10	2.87	87.47	
	Demolish and Install	Sq.	73.50	98.60	2.87	174.97	
	Minimum Charge	Job		125		125	
150 mil							
	Demolish	Sq.		87.50		87.50	Cost includes material and labor to install 150 mil modified bitumen roofing, fully attached to deck by torch.
	Install	Sq.	151	27.50	7.05	185.55	
	Demolish and Install	Sq.	151	115	7.05	273.05	
	Minimum Charge	Job		125		125	
160 mil							
	Demolish	Sq.		87.50		87.50	Cost includes material and labor to install 160 mil modified bitumen roofing, fully attached to deck by torch.
	Install	Sq.	134	28.50	7.35	169.85	
	Demolish and Install	Sq.	134	116	7.35	257.35	
	Minimum Charge	Job		125		125	

Built-up Roofing		Unit	Material	Labor	Equip.	Total	Specification
Emergency Repairs							
	Install	Ea.	274	2350	605	3229	Minimum charge for work requiring hot asphalt.
	Minimum Charge	Job		1650	425	2075	
Asphalt							
3-ply Asphalt							
	Demolish	Sq.		91		91	Cost includes material and labor to install 3-ply asphalt built-up roof including one 30 lb and two 15 lb layers of felt.
	Install	Sq.	116	137	35.50	288.50	
	Demolish and Install	Sq.	116	228	35.50	379.50	
	Minimum Charge	Job		1650	425	2075	
4-ply Asphalt							
	Demolish	Sq.		108		108	Cost includes material and labor to install 4-ply asphalt built-up roof including one 30 lb and three 15 lb layers of felt.
	Install	Sq.	176	149	38.50	363.50	
	Demolish and Install	Sq.	176	257	38.50	471.50	
	Minimum Charge	Job		1650	425	2075	
5-ply Asphalt							
	Demolish	Sq.		142		142	Cost includes material and labor to install 5-ply asphalt built-up roof including one 30 lb and four 15 lb layers of felt.
	Install	Sq.	218	164	42.50	424.50	
	Demolish and Install	Sq.	218	306	42.50	566.50	
	Minimum Charge	Job		1650	425	2075	

Roofing

Built-up Roofing		Unit	Material	Labor	Equip.	Total	Specification
Components / Accessories							
Flood Coat	Install	Sq.	44.50	77		121.50	Includes labor and material to install flood coat.
R / R Gravel and Flood Coat	Install	Sq.	50.50	250		300.50	Includes labor and material to install flood coat and gravel.
Aluminum UV Coat	Install	Sq.	29.50	285	29	343.50	Includes labor and material to install aluminum-based UV coating.
Gravel Coat	Demolish	Sq.		45.50		45.50	Includes labor and material to install gravel coat.
	Install	Sq.	6.20	41.50		47.70	
	Demolish and Install	Sq.	6.20	87		93.20	
Mineral Surface Cap Sheet	Install	Sq.	59.50	8.60		68.10	Cost includes labor and material to install mineral surfaced cap sheet.
Fibrated Aluminum UV Coating	Install	Sq.	23.50	77		100.50	Includes labor and material to install fibered aluminum-based UV coating.
Impregnated Walk							
1"	Install	S.F.	3.01	2.67		5.68	Cost includes labor and material to install 1" layer of asphalt coating.
1/2"	Install	S.F.	6.40	2.11		8.51	Cost includes labor and material to install 1/2" layer of asphalt coating.
3/4"	Install	S.F.	2.72	2.22		4.94	Cost includes labor and material to install 3/4" layer of asphalt coating.

Exterior Doors and Windows



Doors

Roof Window

Double Hung Window

Exterior Type Door	Unit	Material	Labor	Equip.	Total	Specification
Entry						
Flush (1-3/4")						
Demolish	Ea.		50		50	Cost includes material and labor to install 3' x 6' 8" pre-hung 1-3/4" door, including casing and stop, hinges, jamb, aluminum sill, weatherstripped.
Install	Ea.	555	33.50		588.50	
Demolish and Install	Ea.	555	83.50		638.50	
Reinstall	Ea.		33.60		33.60	
Clean	Ea.	3.27	16.85		20.12	
Paint	Ea.	16.70	63		79.70	
Minimum Charge	Job		269		269	
Raised Panel						
Demolish	Ea.		50		50	Cost includes material and labor to install 3' x 6' 8" pre-hung 1-3/4" door, jamb, including casing and stop, hinges, aluminum sill, weatherstripping.
Install	Ea.	525	30		555	
Demolish and Install	Ea.	525	80		605	
Reinstall	Ea.		29.87		29.87	
Clean	Ea.	3.27	16.85		20.12	
Paint	Ea.	16.70	63		79.70	
Minimum Charge	Job		269		269	
Entry w / Lights						
Good Quality						
Demolish	Ea.		50		50	Cost includes material and labor to install 3' x 6' 8" pre-hung 1-3/4" door, solid wood lower panel, with up to 9-light glass panels, casing, sill, weatherstripped.
Install	Ea.	1350	67		1417	
Demolish and Install	Ea.	1350	117		1467	
Reinstall	Ea.		67.20		67.20	
Clean	Ea.	3.27	16.85		20.12	
Paint	Ea.	15.80	29.50		45.30	
Minimum Charge	Job		269		269	
Better Quality						
Demolish	Ea.		50		50	Cost includes material and labor to install 3' x 6' 8" pre-hung 1-3/4" Ash door, solid wood, raised panel door without glass panels.
Install	Ea.	1375	67		1442	
Demolish and Install	Ea.	1375	117		1492	
Reinstall	Ea.		67.20		67.20	
Clean	Ea.	3.27	16.85		20.12	
Paint	Ea.	16.70	63		79.70	
Minimum Charge	Job		269		269	
Premium Quality						
Demolish	Ea.		50		50	Cost includes material and labor to install 3' x 6' 8" pre-hung 1-3/4" Oak door, solid wood, raised panel door without glass panels.
Install	Ea.	3175	31.50		3206.50	
Demolish and Install	Ea.	3175	81.50		3256.50	
Reinstall	Ea.		31.62		31.62	
Clean	Ea.	3.27	16.85		20.12	
Paint	Ea.	16.70	63		79.70	
Minimum Charge	Job		269		269	

Exterior Doors and Windows

Exterior Type Door		Unit	Material	Labor	Equip.	Total	Specification
Custom Quality							
	Demolish	Ea.		50		50	Cost includes material and labor to install 3' x 6' 8" pre-hung 1-3/4" hand-made, solid wood, raised panel door with custom stained glass.
	Install	Ea.	1900	71.50		1971.50	
	Demolish and Install	Ea.	1900	121.50		2021.50	
	Reinstall	Ea.		71.68		71.68	
	Clean	Ea.	.22	16.85		17.07	
	Paint	Ea.	5.65	147		152.65	
	Minimum Charge	Job		269		269	
Miami Style							
	Demolish	Ea.		50		50	
	Install	Ea.	555	31.50		586.50	
	Demolish and Install	Ea.	555	81.50		636.50	Cost includes material and labor to install 3' x 6' 8" pre-hung 1-3/4" luan door of solid wood.
	Reinstall	Ea.		31.62		31.62	
	Clean	Ea.	.22	16.85		17.07	
	Paint	Ea.	16.70	63		79.70	
	Minimum Charge	Job		269		269	
French Style							
1-Light							
	Demolish	Ea.		50		50	Cost includes material and labor to install 3' x 6' 8" pre-hung 1-3/4" French style door with 1 light.
	Install	Ea.	735	89.50		824.50	
	Demolish and Install	Ea.	735	139.50		874.50	
	Reinstall	Ea.		89.60		89.60	
	Clean	Ea.	2.05	25.50		27.55	
	Paint	Ea.	25	110		135	
	Minimum Charge	Job		269		269	
9-Light							
	Demolish	Ea.		50		50	Cost includes material and labor to install 3' x 6' 8" pre-hung 1-3/4" French style door with 9 lights.
	Install	Ea.	1125	38.50		1163.50	
	Demolish and Install	Ea.	1125	88.50		1213.50	
	Reinstall	Ea.		38.40		38.40	
	Clean	Ea.	.45	33.50		33.95	
	Paint	Ea.	25	110		135	
	Minimum Charge	Job		269		269	
15-Light							
	Demolish	Ea.		56		56	Cost includes material and labor to install 3' x 6' 8" pre-hung 1-3/4" French style door with 15 lights.
	Install	Ea.	1150	77		1227	
	Demolish and Install	Ea.	1150	133		1283	
	Reinstall	Ea.		76.80		76.80	
	Clean	Ea.	.45	33.50		33.95	
	Paint	Ea.	25	110		135	
	Minimum Charge	Job		269		269	
Jamb							
Wood							
	Demolish	Ea.		37.50		37.50	Includes material and labor to install flat pine jamb with square cut heads and rabbeted sides for 6' 8" high and 3-9/16" door including trim sets for both sides.
	Install	Ea.	157	14.55		171.55	
	Demolish and Install	Ea.	157	52.05		209.05	
	Clean	Ea.	.10	10.10		10.20	
	Paint	Ea.	15.80	29.50		45.30	
	Minimum Charge	Job		269		269	
Metal 6' 8" High							
	Demolish	Ea.		30		30	Cost includes material and labor to install 18 gauge hollow metal door frame to fit a 4-1/2" jamb 6' 8" high and up to 3' 6" opening.
	Install	Ea.	475	33.50		508.50	
	Demolish and Install	Ea.	475	63.50		538.50	
	Reinstall	Ea.		33.60		33.60	
	Clean	Ea.	.68	8.45		9.13	
	Paint	Ea.	3.83	8.80		12.63	
	Minimum Charge	Job		269		269	

Exterior Doors and Windows

Exterior Type Door		Unit	Material	Labor	Equip.	Total	Specification
Metal 7' High							
	Demolish	Ea.		30		30	Cost includes material and labor to install 18 gauge hollow metal door frame to fit a 4-1/2" jamb 7' high and up to 3' 6" opening.
	Install	Ea.	480	36		516	
	Demolish and Install	Ea.	480	66		546	
	Reinstall	Ea.		35.84		35.84	
	Clean	Ea.	.68	8.45		9.13	
	Paint	Ea.	3.83	8.80		12.63	
	Minimum Charge	Job		269		269	
Metal 8' High							
	Demolish	Ea.		30		30	Cost includes material and labor to install 18 gauge hollow metal door frame to fit a 4-1/2" jamb 8' high and up to 3' 6" opening.
	Install	Ea.	805	45		850	
	Demolish and Install	Ea.	805	75		880	
	Reinstall	Ea.		44.80		44.80	
	Clean	Ea.	.96	10.10		11.06	
	Paint	Ea.	4.27	9.80		14.07	
	Minimum Charge	Job		269		269	
Metal 9' High							
	Demolish	Ea.		30		30	Cost includes material and labor to install 18 gauge hollow metal door frame to fit a 4-1/2" jamb 9' high and up to 3' 6" opening.
	Install	Ea.	350	54		404	
	Demolish and Install	Ea.	350	84		434	
	Reinstall	Ea.		53.76		53.76	
	Clean	Ea.	.96	10.10		11.06	
	Paint	Ea.	4.27	9.80		14.07	
	Minimum Charge	Job		269		269	
Casing Trim							
Single Width							
	Demolish	Ea.		9.50		9.50	Cost includes material and labor to install 11/16" x 2-1/2" pine ranch style casing for one side of a standard door opening.
	Install	Opng.	28	45		73	
	Demolish and Install	Opng.	28	54.50		82.50	
	Reinstall	Opng.		35.84		35.84	
	Clean	Opng.	.46	4.05		4.51	
	Paint	Ea.	11.20	8.80		20	
	Minimum Charge	Job		269		269	
Double Width							
	Demolish	Ea.		11.25		11.25	Cost includes material and labor to install 11/16" x 2-1/2" pine ranch style door casing for one side of a double door opening.
	Install	Opng.	33	54		87	
	Demolish and Install	Opng.	33	65.25		98.25	
	Reinstall	Opng.		43.01		43.01	
	Clean	Opng.	.55	8.10		8.65	
	Paint	Ea.	11.20	10		21.20	
	Minimum Charge	Job		269		269	

Residential Metal Door		Unit	Material	Labor	Equip.	Total	Specification
Pre-hung, Steel-clad							
2' 8" x 6' 8"							
	Demolish	Ea.		50		50	Cost includes material and labor to install 2' 6" x 6' 8" pre-hung 1-3/4" 24 gauge steel clad door with 4-1/2" wood frame, trims, hinges, aluminum sill, weatherstripped.
	Install	Ea.	1525	63.50		1588.50	
	Demolish and Install	Ea.	1525	113.50		1638.50	
	Reinstall	Ea.		63.25		63.25	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	25	63		88	
	Minimum Charge	Job		269		269	

Exterior Doors and Windows

Residential Metal Door		Unit	Material	Labor	Equip.	Total	Specification
3' x 6' 8"							
	Demolish	Ea.		50		50	Cost includes material and labor to install 3' x 6' 8" pre-hung 1-3/4" 24 gauge steel clad door with 4-1/2" wood frame, trims, hinges, aluminum sill, weatherstripped.
	Install	Ea.	1150	71.50		1221.50	
	Demolish and Install	Ea.	1150	121.50		1271.50	
	Reinstall	Ea.		71.68		71.68	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	25	63		88	
	Minimum Charge	Job		269		269	

Metal Door		Unit	Material	Labor	Equip.	Total	Specification
Steel, Door Only							
2' 8" x 6' 8", 18 Gauge							
	Demolish	Ea.		10.65		10.65	Cost includes material and labor to install 18 gauge 2' 8" x 6' 8" steel door only, 1-3/4" thick, hinges.
	Install	Ea.	700	33.50		733.50	
	Demolish and Install	Ea.	700	44.15		744.15	
	Reinstall	Ea.		33.60		33.60	
	Clean	Ea.	1.36	12.65		14.01	
	Paint	Ea.	13.85	36.50		50.35	
	Minimum Charge	Job		269		269	
3' x 6' 8", 18 Gauge							
	Demolish	Ea.		10.65		10.65	Cost includes material and labor to install 18 gauge 3' x 6' 8" steel door only, 1-3/4" thick, hinges.
	Install	Ea.	480	36		516	
	Demolish and Install	Ea.	480	46.65		526.65	
	Reinstall	Ea.		35.84		35.84	
	Clean	Ea.	1.36	12.65		14.01	
	Paint	Ea.	13.85	36.50		50.35	
	Minimum Charge	Job		269		269	
2' 8" x 7', 18 Gauge							
	Demolish	Ea.		10.65		10.65	Cost includes material and labor to install 18 gauge 2' 8" x 7' steel door only, 1-3/4" thick, hinges.
	Install	Ea.	510	36		546	
	Demolish and Install	Ea.	510	46.65		556.65	
	Reinstall	Ea.		35.84		35.84	
	Clean	Ea.	1.36	12.65		14.01	
	Paint	Ea.	13.85	36.50		50.35	
	Minimum Charge	Job		269		269	
3' x 7', 18 Gauge							
	Demolish	Ea.		10.65		10.65	Cost includes material and labor to install 18 gauge 3' x 7' steel door only, 1-3/4" thick, hinges.
	Install	Ea.	530	38.50		568.50	
	Demolish and Install	Ea.	530	49.15		579.15	
	Reinstall	Ea.		38.40		38.40	
	Clean	Ea.	1.36	12.65		14.01	
	Paint	Ea.	13.85	36.50		50.35	
	Minimum Charge	Job		269		269	
3' 6" x 7', 18 Gauge							
	Demolish	Ea.		10.65		10.65	Cost includes material and labor to install 18 gauge 3' 6" x 7' steel door only, 1-3/4" thick, hinges.
	Install	Ea.	420	41.50		461.50	
	Demolish and Install	Ea.	420	52.15		472.15	
	Reinstall	Ea.		41.35		41.35	
	Clean	Ea.	1.36	12.65		14.01	
	Paint	Ea.	13.85	36.50		50.35	
	Minimum Charge	Job		269		269	

Exterior Doors and Windows

Metal Door		Unit	Material	Labor	Equip.	Total	Specification
Casing Trim							
Single Width							
	Demolish	Ea.		9.50		9.50	Cost includes material and labor to install 1 1/16" x 2-1/2" pine ranch style casing for one side of a standard door opening.
	Install	Opng.	28	45		73	
	Demolish and Install	Opng.	28	54.50		82.50	
	Reinstall	Opng.		35.84		35.84	
	Clean	Opng.	.46	4.05		4.51	
	Paint	Ea.	11.20	8.80		20	
	Minimum Charge	Job		269		269	
Double Width							
	Demolish	Ea.		11.25		11.25	Cost includes material and labor to install 1 1/16" x 2-1/2" pine ranch style door casing for one side of a double door opening.
	Install	Opng.	33	54		87	
	Demolish and Install	Opng.	33	65.25		98.25	
	Reinstall	Opng.		43.01		43.01	
	Clean	Opng.	.55	8.10		8.65	
	Paint	Ea.	11.20	10		21.20	
	Minimum Charge	Job		269		269	
Solid Core Door		Unit	Material	Labor	Equip.	Total	Specification
Exterior Type							
Flush (1-3/4")							
	Demolish	Ea.		50		50	Cost includes material and labor to install 3' x 6' 8" pre-hung 1-3/4" door, including casing and stop, hinges, jamb, aluminum sill, weatherstripped.
	Install	Ea.	1450	67		1517	
	Demolish and Install	Ea.	1450	117		1567	
	Reinstall	Ea.		67.20		67.20	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	25	63		88	
	Minimum Charge	Job		269		269	
Raised Panel							
	Demolish	Ea.		50		50	Cost includes material and labor to install 3' x 6' 8" pre-hung 1-3/4" door, jamb, including casing and stop, hinges, aluminum sill, weatherstripping.
	Install	Ea.	525	30		555	
	Demolish and Install	Ea.	525	80		605	
	Reinstall	Ea.		29.87		29.87	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	25	147		172	
	Minimum Charge	Job		269		269	
Entry w / Lights							
	Demolish	Ea.		50		50	Cost includes material and labor to install 3' x 6' 8" pre-hung 1-3/4" door, solid wood lower panel, with up to 9-light glass panels, casing, sill, weatherstripped.
	Install	Ea.	1350	67		1417	
	Demolish and Install	Ea.	1350	117		1467	
	Reinstall	Ea.		67.20		67.20	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	5.65	147		152.65	
	Minimum Charge	Job		269		269	
Custom Entry							
	Demolish	Ea.		50		50	Cost includes material and labor to install prehung, fir, single glazed with lead coming, 1-3/4" x 6' 8" x 3'
	Install	Ea.	2300	108		2408	
	Demolish and Install	Ea.	2300	158		2458	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	13.85	36.50		50.35	
	Minimum Charge	Job		269		269	

Exterior Doors and Windows

Solid Core Door

Dutch Style

Demolish	Ea.		50		50	Includes material and labor to install dutch door, pine, 1-3/4" x 6' 8" x 2' 8" wide.
Install	Ea.	2300	89.50		2389.50	
Demolish and Install	Ea.	2300	139.50		2439.50	
Reinstall	Ea.		89.60		89.60	
Clean	Ea.	3.27	16.85		20.12	
Paint	Ea.	5.65	147		152.65	
Minimum Charge	Job		269		269	

Miami Style

Demolish	Ea.		50		50	Cost includes material and labor to install 3' x 6' 8" pre-hung 1-3/4" lauan door of solid wood.
Install	Ea.	555	31.50		586.50	
Demolish and Install	Ea.	555	81.50		636.50	
Reinstall	Ea.		31.62		31.62	
Clean	Ea.	3.27	16.85		20.12	
Paint	Ea.	16.70	63		79.70	
Minimum Charge	Job		269		269	

French Style

Demolish	Ea.		56		56	Cost includes material and labor to install 3' x 6' 8" pre-hung 1-3/4" French style door with 15 lights.
Install	Ea.	1150	77		1227	
Demolish and Install	Ea.	1150	133		1283	
Reinstall	Ea.		76.80		76.80	
Clean	Ea.	.22	16.85		17.07	
Paint	Ea.	13.30	220		233.30	
Minimum Charge	Job		269		269	

Double

Demolish	Ea.		37.50		37.50	Includes material and labor to install a pre-hung double entry door including frame and exterior trim.
Install	Ea.	1725	134		1859	
Demolish and Install	Ea.	1725	171.50		1896.50	
Clean	Ea.	.12	65.50		65.62	
Paint	Ea.	49.50	220		269.50	
Minimum Charge	Job		134		134	

Commercial Grade

3' x 6' 8"

Demolish	Ea.		50		50	Includes material and labor to install flush solid core 1-3/4" hardwood veneer 3' x 6' 8" door only.
Install	Ea.	1300	31.50		1331.50	
Demolish and Install	Ea.	1300	81.50		1381.50	
Reinstall	Ea.		31.62		31.62	
Clean	Ea.	3.27	16.85		20.12	
Paint	Ea.	23	36.50		59.50	
Minimum Charge	Job		269		269	

3' 6" x 6' 8"

Demolish	Ea.		50		50	Includes material and labor to install flush solid core 1-3/4" hardwood veneer 3' 6" x 6' 8" door only.
Install	Ea.	1350	31.50		1381.50	
Demolish and Install	Ea.	1350	81.50		1431.50	
Reinstall	Ea.		31.62		31.62	
Clean	Ea.	3.27	16.85		20.12	
Paint	Ea.	23	36.50		59.50	
Minimum Charge	Job		269		269	

3' x 7'

Demolish	Ea.		50		50	Includes material and labor to install flush solid core 1-3/4" hardwood veneer 3' x 7' door only.
Install	Ea.	940	77		1017	
Demolish and Install	Ea.	940	127		1067	
Reinstall	Ea.		76.80		76.80	
Clean	Ea.	3.27	16.85		20.12	
Paint	Ea.	23	36.50		59.50	
Minimum Charge	Job		269		269	

Exterior Doors and Windows

Solid Core Door		Unit	Material	Labor	Equip.	Total	Specification
3' 6" x 7'							
	Demolish	Ea.		50		50	Includes material and labor to install flush solid core 1-3/4" hardwood veneer 3' 6" x 7' door only.
	Install	Ea.	1450	38.50		1488.50	
	Demolish and Install	Ea.	1450	88.50		1538.50	
	Reinstall	Ea.		38.40		38.40	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	23	36.50		59.50	
	Minimum Charge	Job		269		269	
3' x 8'							
	Demolish	Ea.		50		50	Includes material and labor to install flush solid core 1-3/4" hardwood veneer 3' x 8' door only.
	Install	Ea.	1475	67		1542	
	Demolish and Install	Ea.	1475	117		1592	
	Reinstall	Ea.		67.20		67.20	
	Clean	Ea.	3.93	25.50		29.43	
	Paint	Ea.	23	36.50		59.50	
	Minimum Charge	Job		269		269	
3' 6" x 8'							
	Demolish	Ea.		50		50	Includes material and labor to install flush solid core 1-3/4" hardwood veneer 3' 6" x 8' door only.
	Install	Ea.	1600	67		1667	
	Demolish and Install	Ea.	1600	117		1717	
	Reinstall	Ea.		67.20		67.20	
	Clean	Ea.	3.93	25.50		29.43	
	Paint	Ea.	23	36.50		59.50	
	Minimum Charge	Job		269		269	
3' x 9'							
	Demolish	Ea.		50		50	Includes material and labor to install flush solid core 1-3/4" hardwood veneer 3' x 9' door only.
	Install	Ea.	855	77		932	
	Demolish and Install	Ea.	855	127		982	
	Reinstall	Ea.		76.80		76.80	
	Clean	Ea.	3.93	25.50		29.43	
	Paint	Ea.	23	36.50		59.50	
	Minimum Charge	Job		269		269	
Stain							
	Install	Ea.	25.50	49		74.50	Includes labor and material to stain exterior type door and trim on both sides.
	Minimum Charge	Job		220		220	
Door Only (SC)							
2' 4" x 6' 8"							
	Demolish	Ea.		10.65		10.65	Cost includes material and labor to install 2' 4" x 6' 8" lauan solid core door slab.
	Install	Ea.	194	30		224	
	Demolish and Install	Ea.	194	40.65		234.65	
	Reinstall	Ea.		29.87		29.87	
	Clean	Ea.	1.36	12.65		14.01	
	Paint	Ea.	8.85	55		63.85	
	Minimum Charge	Job		269		269	
2' 8" x 6' 8"							
	Demolish	Ea.		10.65		10.65	Cost includes material and labor to install 2' 8" x 6' 8" lauan solid core door slab.
	Install	Ea.	213	30		243	
	Demolish and Install	Ea.	213	40.65		253.65	
	Reinstall	Ea.		29.87		29.87	
	Clean	Ea.	1.36	12.65		14.01	
	Paint	Ea.	8.85	55		63.85	
	Minimum Charge	Job		269		269	

Exterior Doors and Windows

Solid Core Door		Unit	Material	Labor	Equip.	Total	Specification
3' x 6' 8"							
	Demolish	Ea.		10.65		10.65	Cost includes material and labor to install 3' x 6' 8" luan solid core door slab.
	Install	Ea.	233	31.50		264.50	
	Demolish and Install	Ea.	233	42.15		275.15	
	Reinstall	Ea.		31.62		31.62	
	Clean	Ea.	1.36	12.65		14.01	
	Paint	Ea.	8.85	55		63.85	
	Minimum Charge	Job		269		269	
3' 6" x 6' 8"							
	Demolish	Ea.		10.65		10.65	Cost includes material and labor to install 3' x 6" x 6' 8" luan solid core door slab.
	Install	Ea.	320	33.50		353.50	
	Demolish and Install	Ea.	320	44.15		364.15	
	Reinstall	Ea.		33.60		33.60	
	Clean	Ea.	1.36	12.65		14.01	
	Paint	Ea.	8.85	55		63.85	
	Minimum Charge	Job		269		269	
Panel							
	Demolish	Ea.		10.65		10.65	Cost includes material and labor to install 3' x 6' 8" six (6) panel interior door.
	Install	Ea.	287	63.50		350.50	
	Demolish and Install	Ea.	287	74.15		361.15	
	Reinstall	Ea.		63.25		63.25	
	Clean	Ea.	1.64	12.65		14.29	
	Paint	Ea.	8.85	55		63.85	
	Minimum Charge	Job		269		269	
Casing Trim							
Single Width							
	Demolish	Ea.		9.50		9.50	Cost includes material and labor to install 1 1/16" x 2-1/2" pine ranch style casing for one side of a standard door opening.
	Install	Opng.	28	45		73	
	Demolish and Install	Opng.	28	54.50		82.50	
	Reinstall	Opng.		35.84		35.84	
	Clean	Opng.	.46	4.05		4.51	
	Paint	Ea.	11.20	8.80		20	
	Minimum Charge	Job		269		269	
Double Width							
	Demolish	Ea.		11.25		11.25	Cost includes material and labor to install 1 1/16" x 2-1/2" pine ranch style door casing for one side of a double door opening.
	Install	Opng.	33	54		87	
	Demolish and Install	Opng.	33	65.25		98.25	
	Reinstall	Opng.		43.01		43.01	
	Clean	Opng.	.55	8.10		8.65	
	Paint	Ea.	11.20	10		21.20	
	Minimum Charge	Job		269		269	

Components		Unit	Material	Labor	Equip.	Total	Specification
Hardware							
Doorknob							
	Demolish	Ea.		21.50		21.50	Includes material and labor to install residential passage lockset, keyless bored type.
	Install	Ea.	66	33.50		99.50	
	Demolish and Install	Ea.	66	55		121	
	Reinstall	Ea.		26.88		26.88	
	Clean	Ea.	.33	12.65		12.98	
	Minimum Charge	Job		269		269	

Exterior Doors and Windows

Components		Unit	Material	Labor	Equip.	Total	Specification
Doorknob w / Lock	Demolish	Ea.		21.50		21.50	Includes material and labor to install privacy lockset.
	Install	Ea.	68	33.50		101.50	
	Demolish and Install	Ea.	68	55		123	
	Reinstall	Ea.		26.88		26.88	
	Clean	Ea.	.33	12.65		12.98	
	Minimum Charge	Job		269		269	
Lever Handle	Demolish	Ea.		21.50		21.50	Includes material and labor to install residential passage lockset, keyless bored type with lever handle.
	Install	Ea.	284	54		338	
	Demolish and Install	Ea.	284	75.50		359.50	
	Reinstall	Ea.		43.01		43.01	
	Clean	Ea.	.33	12.65		12.98	
	Minimum Charge	Job		269		269	
Deadbolt	Demolish	Ea.		18.65		18.65	Includes material and labor to install a deadbolt.
	Install	Ea.	142	38.50		180.50	
	Demolish and Install	Ea.	142	57.15		199.15	
	Reinstall	Ea.		30.72		30.72	
	Clean	Ea.	.33	12.65		12.98	
	Minimum Charge	Job		269		269	
Grip Handle Entry	Demolish	Ea.		17.05		17.05	Includes material and labor to install residential keyed entry lock set with grip type handle.
	Install	Ea.	171	59.50		230.50	
	Demolish and Install	Ea.	171	76.55		247.55	
	Reinstall	Ea.		47.79		47.79	
	Clean	Ea.	.33	12.65		12.98	
	Minimum Charge	Job		269		269	
Panic Device	Demolish	Ea.		45		45	Includes material and labor to install touch bar, low profile, exit only.
	Install	Ea.	585	89.50		674.50	
	Demolish and Install	Ea.	585	134.50		719.50	
	Reinstall	Ea.		71.68		71.68	
	Clean	Ea.	.17	22.50		22.67	
	Minimum Charge	Job		269		269	
Closer	Demolish	Ea.		11.20		11.20	Includes material and labor to install pneumatic heavy duty closer for exterior type doors.
	Install	Ea.	435	89.50		524.50	
	Demolish and Install	Ea.	435	100.70		535.70	
	Reinstall	Ea.		71.68		71.68	
	Clean	Ea.	.17	16.85		17.02	
	Minimum Charge	Job		269		269	
Peep-hole	Demolish	Ea.		10		10	Includes material and labor to install peep-hole for door.
	Install	Ea.	16.10	16.80		32.90	
	Demolish and Install	Ea.	16.10	26.80		42.90	
	Reinstall	Ea.		13.44		13.44	
	Clean	Ea.	.02	5.05		5.07	
	Minimum Charge	Job		269		269	
Exit Sign	Demolish	Ea.		32.50		32.50	Includes material and labor to install a wall mounted interior electric exit sign.
	Install	Ea.	127	80.50		207.50	
	Demolish and Install	Ea.	127	113		240	
	Reinstall	Ea.		64.52		64.52	
	Clean	Ea.	.02	10.25		10.27	
	Minimum Charge	Job		269		269	

Exterior Doors and Windows

Components		Unit	Material	Labor	Equip.	Total	Specification
Kickplate							
	Demolish	Ea.		16.60		16.60	Includes material and labor to install aluminum kickplate, 10" x 28".
	Install	Ea.	42.50	36		78.50	
	Demolish and Install	Ea.	42.50	52.60		95.10	
	Reinstall	Ea.		28.67		28.67	
	Clean	Ea.	.33	12.65		12.98	
	Minimum Charge	Job		269		269	
Threshold							
	Install	L.F.	2.89	5.40		8.29	Includes labor and material to install oak threshold.
	Minimum Charge	Job		134		134	
Weatherstripping							
	Install	L.F.	1.78	1.34		3.12	Includes labor and material to install rubber weatherstripping for door.
	Minimum Charge	Job		134		134	
Metal Jamb							
6' 8" High							
	Demolish	Ea.		30		30	Cost includes material and labor to install 18 gauge hollow metal door frame to fit a 4-1/2" jamb 6' 8" high and up to 3' 6" opening.
	Install	Ea.	475	33.50		508.50	
	Demolish and Install	Ea.	475	63.50		538.50	
	Reinstall	Ea.		33.60		33.60	
	Clean	Ea.	.68	8.45		9.13	
	Paint	Ea.	3.83	8.80		12.63	
	Minimum Charge	Job		269		269	
7' High							
	Demolish	Ea.		30		30	Cost includes material and labor to install 18 gauge hollow metal door frame to fit a 4-1/2" jamb 7' high and up to 3' 6" opening.
	Install	Ea.	480	36		516	
	Demolish and Install	Ea.	480	66		546	
	Reinstall	Ea.		35.84		35.84	
	Clean	Ea.	.68	8.45		9.13	
	Paint	Ea.	3.83	8.80		12.63	
	Minimum Charge	Job		269		269	
8' High							
	Demolish	Ea.		30		30	Cost includes material and labor to install 18 gauge hollow metal door frame to fit a 4-1/2" jamb 8' high and up to 3' 6" opening.
	Install	Ea.	805	45		850	
	Demolish and Install	Ea.	805	75		880	
	Reinstall	Ea.		44.80		44.80	
	Clean	Ea.	.96	10.10		11.06	
	Paint	Ea.	4.27	9.80		14.07	
	Minimum Charge	Job		269		269	
9' High							
	Demolish	Ea.		30		30	Cost includes material and labor to install 18 gauge hollow metal door frame to fit a 4-1/2" jamb 9' high and up to 3' 6" opening.
	Install	Ea.	350	54		404	
	Demolish and Install	Ea.	350	84		434	
	Reinstall	Ea.		53.76		53.76	
	Clean	Ea.	.96	10.10		11.06	
	Paint	Ea.	4.27	9.80		14.07	
	Minimum Charge	Job		269		269	
Wood Jamb							
	Demolish	Ea.		37.50		37.50	Includes material and labor to install flat pine jamb with square cut heads and rabbeted sides for 6' 8" high and 3-9/16" door including trim sets for both sides.
	Install	Ea.	157	14.55		171.55	
	Demolish and Install	Ea.	157	52.05		209.05	
	Clean	Ea.	.10	10.10		10.20	
	Paint	Ea.	15.80	29.50		45.30	
	Minimum Charge	Job		269		269	
Stain							
	Install	Ea.	17.35	36.50		53.85	Includes labor and material to stain single door and trim on both sides.
	Minimum Charge	Job		220		220	

Exterior Doors and Windows

Components	Unit	Material	Labor	Equip.	Total	Specification
Shave & Refit						
Install	Ea.		45		45	Includes labor to shave and rework door to fit opening at the job site.
Minimum Charge	Job		134		134	
Sliding Patio Door						
Aluminum						
6' Single Pane						
Demolish	Ea.		74.50		74.50	Cost includes material and labor to install 6' x 6' 8" sliding anodized aluminum patio door with single pane tempered safety glass, anodized frame, screen, weatherstripped.
Install	Ea.	3675	269		3944	
Demolish and Install	Ea.	3675	343.50		4018.50	
Reinstall	Ea.		215.04		215.04	
Clean	Ea.	2.05	25.50		27.55	
Minimum Charge	Job		269		269	
8' Single Pane						
Demolish	Ea.		74.50		74.50	Cost includes material and labor to install 8' x 6' 8" sliding aluminum patio door with single pane tempered safety glass, anodized frame, screen, weatherstripped.
Install	Ea.	4850	360		5210	
Demolish and Install	Ea.	4850	434.50		5284.50	
Reinstall	Ea.		286.72		286.72	
Clean	Ea.	2.05	25.50		27.55	
Minimum Charge	Job		269		269	
10' Single Pane						
Demolish	Ea.		74.50		74.50	Cost includes material and labor to install 10' x 6' 8" sliding aluminum patio door with single pane tempered safety glass, anodized frame, screen, weatherstripped.
Install	Ea.	7100	540		7640	
Demolish and Install	Ea.	7100	614.50		7714.50	
Reinstall	Ea.		430.08		430.08	
Clean	Ea.	2.05	25.50		27.55	
Minimum Charge	Job		269		269	
6' Insulated						
Demolish	Ea.		74.50		74.50	Cost includes material and labor to install 6' x 6' 8" sliding aluminum patio door with double insulated tempered glass, baked-on enamel finish, screen, weatherstripped.
Install	Ea.	4850	269		5119	
Demolish and Install	Ea.	4850	343.50		5193.50	
Reinstall	Ea.		215.04		215.04	
Clean	Ea.	2.05	25.50		27.55	
Minimum Charge	Job		269		269	
8' Insulated						
Demolish	Ea.		74.50		74.50	Cost includes material and labor to install 8' x 6' 8" sliding aluminum patio door with insulated tempered glass, baked-on enamel finish, screen, weatherstripped.
Install	Ea.	5150	360		5510	
Demolish and Install	Ea.	5150	434.50		5584.50	
Reinstall	Ea.		286.72		286.72	
Clean	Ea.	2.05	25.50		27.55	
Minimum Charge	Job		269		269	
10' Insulated						
Demolish	Ea.		74.50		74.50	Cost includes material and labor to install 10' x 6' 8" sliding aluminum patio door with double insulated tempered glass, baked-on enamel finish, screen, weatherstripped.
Install	Ea.	7100	540		7640	
Demolish and Install	Ea.	7100	614.50		7714.50	
Reinstall	Ea.		430.08		430.08	
Clean	Ea.	2.05	25.50		27.55	
Minimum Charge	Job		269		269	

Exterior Doors and Windows

Sliding Patio Door		Unit	Material	Labor	Equip.	Total	Specification
Vinyl							
6' Single Pane							
	Demolish	Ea.		74.50		74.50	Cost includes material and labor to install 6' x 6' 8" sliding vinyl patio door with single pane tempered safety glass, anodized frame, screen, weatherstripped.
	Install	Ea.	1975	269		2244	
	Demolish and Install	Ea.	1975	343.50		2318.50	
	Reinstall	Ea.		215.04		215.04	
	Clean	Ea.	2.05	25.50		27.55	
	Minimum Charge	Job		269		269	
8' Single Pane							
	Demolish	Ea.		74.50		74.50	Cost includes material and labor to install 8' x 6' 8" sliding vinyl patio door with single pane tempered safety glass, anodized frame, screen, weatherstripped.
	Install	Ea.	1975	360		2335	
	Demolish and Install	Ea.	1975	434.50		2409.50	
	Reinstall	Ea.		286.72		286.72	
	Clean	Ea.	2.05	25.50		27.55	
	Minimum Charge	Job		269		269	
10' Single Pane							
	Demolish	Ea.		74.50		74.50	Cost includes material and labor to install 10' x 6' 8" sliding vinyl patio door with single pane tempered safety glass, anodized frame, screen, weatherstripped.
	Install	Ea.	7100	540		7640	
	Demolish and Install	Ea.	7100	614.50		7714.50	
	Reinstall	Ea.		430.08		430.08	
	Clean	Ea.	2.05	25.50		27.55	
	Minimum Charge	Job		269		269	
6' Insulated							
	Demolish	Ea.		74.50		74.50	Cost includes material and labor to install 6' x 6' 8" sliding vinyl patio door with double insulated tempered glass, anodized frame, screen, weatherstripped.
	Install	Ea.	4200	269		4469	
	Demolish and Install	Ea.	4200	343.50		4543.50	
	Reinstall	Ea.		215.04		215.04	
	Clean	Ea.	2.05	25.50		27.55	
	Minimum Charge	Job		269		269	
8' Insulated							
	Demolish	Ea.		74.50		74.50	Cost includes material and labor to install 8' x 6' 8" sliding vinyl patio door with double insulated tempered glass, anodized frame, screen, weatherstripped.
	Install	Ea.	4850	360		5210	
	Demolish and Install	Ea.	4850	434.50		5284.50	
	Reinstall	Ea.		286.72		286.72	
	Clean	Ea.	2.05	25.50		27.55	
	Minimum Charge	Job		269		269	
10' Insulated							
	Demolish	Ea.		74.50		74.50	Cost includes material and labor to install 10' x 6' 8" sliding vinyl patio door with double insulated tempered glass, anodized frame, screen, weatherstripped.
	Install	Ea.	7100	269		7369	
	Demolish and Install	Ea.	7100	343.50		7443.50	
	Reinstall	Ea.		215.04		215.04	
	Clean	Ea.	2.05	25.50		27.55	
	Minimum Charge	Job		269		269	
Wood Framed							
6' Premium Insulated							
	Demolish	Ea.		74.50		74.50	Cost includes material and labor to install 6' x 6' 8" sliding wood patio door with pine frame, double insulated glass, screen, lock and dead bolt, weatherstripped. Add for casing and finishing.
	Install	Ea.	9350	269		9619	
	Demolish and Install	Ea.	9350	343.50		9693.50	
	Reinstall	Ea.		215.04		215.04	
	Clean	Ea.	2.05	25.50		27.55	
	Minimum Charge	Job		269		269	

Exterior Doors and Windows

Sliding Patio Door		Unit	Material	Labor	Equip.	Total	Specification
8' Premium Insulated							
	Demolish	Ea.		74.50		74.50	Cost includes material and labor to install 8' x 6' 8" sliding wood patio door with pine frame, double insulated glass, screen, lock and dead bolt, weatherstripped. Add for casing and finishing.
	Install	Ea.	13600	360		13960	
	Demolish and Install	Ea.	13600	434.50		14034.50	
	Reinstall	Ea.		286.72		286.72	
	Clean	Ea.	2.05	25.50		27.55	
	Minimum Charge	Job		269		269	
9' Premium Insulated							
	Demolish	Ea.		74.50		74.50	Cost includes material and labor to install 9' x 6' 8" sliding wood patio door with pine frame, double insulated glass, screen, lock and dead bolt, weatherstripped. Add for casing and finishing.
	Install	Ea.	13600	360		13960	
	Demolish and Install	Ea.	13600	434.50		14034.50	
	Reinstall	Ea.		286.72		286.72	
	Clean	Ea.	2.05	25.50		27.55	
	Minimum Charge	Job		269		269	
Stain							
	Install	Ea.	25.50	49		74.50	Includes labor and material to stain exterior type door and trim on both sides.
	Minimum Charge	Job		220		220	
Casing Trim							
	Demolish	Ea.		11.25		11.25	Cost includes material and labor to install 11/16" x 2-1/2" pine ranch style door casing for one side of a double door opening.
	Install	Opng.	33	54		87	
	Demolish and Install	Opng.	33	65.25		98.25	
	Reinstall	Opng.		43.01		43.01	
	Clean	Opng.	.55	8.10		8.65	
	Paint	Ea.	11.20	10		21.20	
	Minimum Charge	Job		269		269	
Sliding Screen							
	Demolish	Ea.		10.65		10.65	Includes material and labor to install sliding screen door, 6' 8" x 3'.
	Install	Ea.	590	27		617	
	Demolish and Install	Ea.	590	37.65		627.65	
	Reinstall	Ea.		21.50		21.50	
	Clean	Ea.	.68	8.45		9.13	
	Minimum Charge	Job		269		269	

Screen Door		Unit	Material	Labor	Equip.	Total	Specification
Aluminum							
	Demolish	Ea.		50		50	Includes material and labor to install aluminum frame screen door with fiberglass screen cloth, closer, hinges, latch.
	Install	Ea.	475	77		552	
	Demolish and Install	Ea.	475	127		602	
	Reinstall	Ea.		61.44		61.44	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	10.80	17.65		28.45	
	Minimum Charge	Job		269		269	
Wood							
	Demolish	Ea.		50		50	Includes material and labor to install wood screen door with aluminum cloth screen. Frame and hardware not included.
	Install	Ea.	770	89.50		859.50	
	Demolish and Install	Ea.	770	139.50		909.50	
	Reinstall	Ea.		71.68		71.68	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	10.80	17.65		28.45	
	Minimum Charge	Job		269		269	
Shave & Refit							
	Install	Ea.		45		45	Includes labor to shave and rework door to fit opening at the job site.
	Minimum Charge	Job		269		269	

Exterior Doors and Windows

Storm Door		Unit	Material	Labor	Equip.	Total	Specification
Good Grade							
	Demolish	Ea.		50		50	Includes material and labor to install aluminum frame storm door with fiberglass screen cloth, upper glass panel, closer, hinges, latch.
	Install	Ea.	505	77		582	
	Demolish and Install	Ea.	505	127		632	
	Reinstall	Ea.		61.44		61.44	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	10.80	17.65		28.45	
	Minimum Charge	Job		269		269	
Better Grade							
	Demolish	Ea.		50		50	Includes material and labor to install aluminum frame storm door with fiberglass screen cloth, upper and lower glass panel, closer, latch.
	Install	Ea.	505	77		582	
	Demolish and Install	Ea.	505	127		632	
	Reinstall	Ea.		61.44		61.44	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	10.80	17.65		28.45	
	Minimum Charge	Job		269		269	
Premium Grade							
	Demolish	Ea.		50		50	Includes material and labor to install aluminum frame storm door with fiberglass screen cloth, upper and lower glass panel, closer, latch.
	Install	Ea.	405	77		482	
	Demolish and Install	Ea.	405	127		532	
	Reinstall	Ea.		61.44		61.44	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	10.80	17.65		28.45	
	Minimum Charge	Job		269		269	
Insulated							
	Demolish	Ea.		50		50	Includes material and labor to install aluminum frame storm door with fiberglass screen cloth, upper and lower glass panel, closer, latch.
	Install	Ea.	505	38.50		543.50	
	Demolish and Install	Ea.	505	88.50		593.50	
	Reinstall	Ea.		30.72		30.72	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	10.80	17.65		28.45	
	Minimum Charge	Job		269		269	

Garage Door		Unit	Material	Labor	Equip.	Total	Specification
9' One Piece Metal							
	Demolish	Ea.		126		126	Includes material and labor to install one piece steel garage door 9' x 7' primed including hardware.
	Install	Ea.	2475	134		2609	
	Demolish and Install	Ea.	2475	260		2735	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	4.09	50.50		54.59	
	Paint	Ea.	11.05	110		121.05	
	Minimum Charge	Job		269		269	
16' One Piece Metal							
	Demolish	Ea.		149		149	Includes material and labor to install one piece steel garage door 16' x 7' primed including hardware.
	Install	Ea.	4600	179		4779	
	Demolish and Install	Ea.	4600	328		4928	
	Reinstall	Ea.		143.36		143.36	
	Clean	Ea.	8.20	67.50		75.70	
	Paint	Ea.	22	126		148	
	Minimum Charge	Job		269		269	

Exterior Doors and Windows

Garage Door		Unit	Material	Labor	Equip.	Total	Specification
9' Metal Sectional							
	Demolish	Ea.		126		126	Includes material and labor to install sectional metal garage door 9' x 7' primed including hardware.
	Install	Ea.	1300	134		1434	
	Demolish and Install	Ea.	1300	260		1560	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	4.18	58		62.18	
	Paint	Ea.	22	126		148	
	Minimum Charge	Job		269		269	
16' Metal Sectional							
	Demolish	Ea.		149		149	Includes material and labor to install sectional metal garage door 16' x 7' primed including hardware.
	Install	Ea.	2200	179		2379	
	Demolish and Install	Ea.	2200	328		2528	
	Reinstall	Ea.		143.36		143.36	
	Clean	Ea.	8.20	67.50		75.70	
	Paint	Ea.	22	126		148	
	Minimum Charge	Job		269		269	
Metal / Steel Roll Up							
8' x 8' Steel							
	Demolish	Ea.		171		171	Cost includes material and labor to install 8' x 8' steel overhead roll-up, chain hoist operated service door.
	Install	Ea.	1200	755		1955	
	Demolish and Install	Ea.	1200	926		2126	
	Reinstall	Ea.		603.20		603.20	
	Clean	Ea.	4.18	58		62.18	
	Paint	Ea.	23.50	147		170.50	
	Minimum Charge	Job		1200		1200	
10' x 10' Steel							
	Demolish	Ea.		199		199	Cost includes material and labor to install 10' x 10' steel overhead roll-up, chain hoist operated service door.
	Install	Ea.	1625	860		2485	
	Demolish and Install	Ea.	1625	1059		2684	
	Reinstall	Ea.		689.37		689.37	
	Clean	Ea.	6.55	81		87.55	
	Paint	Ea.	37	147		184	
	Minimum Charge	Job		1200		1200	
12' x 12' Steel							
	Demolish	Ea.		239		239	Cost includes material and labor to install 12' x 12' steel overhead roll-up, chain hoist operated service door.
	Install	Ea.	2000	1000		3000	
	Demolish and Install	Ea.	2000	1239		3239	
	Reinstall	Ea.		804.27		804.27	
	Clean	Ea.	9.40	90		99.40	
	Paint	Ea.	53	176		229	
	Minimum Charge	Job		1200		1200	
14' x 14' Steel							
	Demolish	Ea.		299		299	Cost includes material and labor to install 14' x 14' steel overhead roll-up, chain hoist operated service door.
	Install	Ea.	3025	1500		4525	
	Demolish and Install	Ea.	3025	1799		4824	
	Reinstall	Ea.		1206.40		1206.40	
	Clean	Ea.	12.80	116		128.80	
	Paint	Ea.	61.50	220		281.50	
	Minimum Charge	Job		1200		1200	
18' x 18' Steel							
	Demolish	Ea.		330		330	Cost includes material and labor to install 18' x 18' steel overhead roll-up, chain hoist operated service door.
	Install	Opng.	4600	2000		6600	
	Demolish and Install	Opng.	4600	2330		6930	
	Reinstall	Opng.		1608.53		1608.53	
	Clean	Ea.	12.80	67.50		80.30	
	Paint	Ea.	119	440		559	
	Minimum Charge	Job		1200		1200	
Automatic Motor							
	Install	Ea.	1600	54		1654	Includes labor and material to install electric opener motor, 1/3 HP.
	Minimum Charge	Job		269		269	

Exterior Doors and Windows

Garage Door		Unit	Material	Labor	Equip.	Total	Specification
9' One Piece Wood							
	Demolish	Ea.		126		126	Includes material and labor to install one piece wood garage door 9' x 7' primed including hardware.
	Install	Ea.	3950	134		4084	
	Demolish and Install	Ea.	3950	260		4210	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	4.09	50.50		54.59	
	Paint	Ea.	11.05	110		121.05	
	Minimum Charge	Job		269		269	
9' Wood Sectional							
	Demolish	Ea.		126		126	Includes material and labor to install sectional wood garage door 9' x 7' unfinished including hardware.
	Install	Ea.	3325	134		3459	
	Demolish and Install	Ea.	3325	260		3585	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	4.09	50.50		54.59	
	Paint	Ea.	11.05	110		121.05	
	Minimum Charge	Job		269		269	
16' Wood Sectional							
	Demolish	Ea.		149		149	Includes material and labor to install sectional fiberglass garage door 16' x 7' unfinished including hardware.
	Install	Ea.	3600	179		3779	
	Demolish and Install	Ea.	3600	328		3928	
	Reinstall	Ea.		143.36		143.36	
	Clean	Ea.	8.20	67.50		75.70	
	Paint	Ea.	22	126		148	
	Minimum Charge	Job		269		269	
Electric Opener							
	Demolish	Ea.		90		90	Includes material and labor to install electric opener, 1/3 HP economy.
	Install	Ea.	1275	101		1376	
	Demolish and Install	Ea.	1275	191		1466	
	Reinstall	Ea.		80.69		80.69	
	Clean	Ea.	.17	22.50		22.67	
	Minimum Charge	Job		269		269	
Springs							
	Install	Pair	110	134		244	Includes labor and material to replace springs for garage door.
	Minimum Charge	Job		269		269	

Commercial Metal Door		Unit	Material	Labor	Equip.	Total	Specification
Pre-hung Steel Door							
2' 8" x 6' 8"							
	Demolish	Ea.		74.50		74.50	Cost includes material and labor to install 2' 8" x 6' 8" pre-hung 1-3/4" 18 gauge steel door with steel frame, hinges, aluminum sill, weather-stripped.
	Install	Ea.	620	33.50		653.50	
	Demolish and Install	Ea.	620	108		728	
	Reinstall	Ea.		33.60		33.60	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	13.85	36.50		50.35	
	Minimum Charge	Job		269		269	
3' x 6' 8"							
	Demolish	Ea.		74.50		74.50	Cost includes material and labor to install 3' x 6' 8" pre-hung 1-3/4" 18 gauge steel door with steel frame, hinges, aluminum sill, weather-stripped.
	Install	Ea.	1150	36		1186	
	Demolish and Install	Ea.	1150	110.50		1260.50	
	Reinstall	Ea.		35.84		35.84	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	13.85	36.50		50.35	
	Minimum Charge	Job		269		269	

Exterior Doors and Windows

Commercial Metal Door

3' 6" x 6' 8"

Demolish	Ea.		74.50		74.50
Install	Ea.	1250	41.50		1291.50
Demolish and Install	Ea.	1250	116		1366
Reinstall	Ea.		41.35		41.35
Clean	Ea.	3.27	16.85		20.12
Paint	Ea.	13.85	36.50		50.35
Minimum Charge	Job		269		269

Cost includes material and labor to install 3' 6" x 6' 8" pre-hung 1-3/4" 18 gauge steel door with steel frame, hinges, aluminum sill, weather-stripped.

4' x 6' 8"

Demolish	Ea.		74.50		74.50
Install	Ea.	1350	54		1404
Demolish and Install	Ea.	1350	128.50		1478.50
Reinstall	Ea.		53.76		53.76
Clean	Ea.	3.27	16.85		20.12
Paint	Ea.	13.85	36.50		50.35
Minimum Charge	Job		269		269

Cost includes material and labor to install 4' x 6' 8" pre-hung 1-3/4" 18 gauge steel door with steel frame, hinges, aluminum sill, weather-stripped.

Metal Jamb

6' 8" High

Demolish	Ea.		30		30
Install	Ea.	475	33.50		508.50
Demolish and Install	Ea.	475	63.50		538.50
Reinstall	Ea.		33.60		33.60
Clean	Ea.	.68	8.45		9.13
Paint	Ea.	3.83	8.80		12.63
Minimum Charge	Job		269		269

Cost includes material and labor to install 18 gauge hollow metal door frame to fit a 4-1/2" jamb 6' 8" high and up to 3' 6" opening.

7' High

Demolish	Ea.		30		30
Install	Ea.	480	36		516
Demolish and Install	Ea.	480	66		546
Reinstall	Ea.		35.84		35.84
Clean	Ea.	.68	8.45		9.13
Paint	Ea.	3.83	8.80		12.63
Minimum Charge	Job		269		269

Cost includes material and labor to install 18 gauge hollow metal door frame to fit a 4-1/2" jamb 7' high and up to 3' 6" opening.

8' High

Demolish	Ea.		30		30
Install	Ea.	805	45		850
Demolish and Install	Ea.	805	75		880
Reinstall	Ea.		44.80		44.80
Clean	Ea.	.96	10.10		11.06
Paint	Ea.	4.27	9.80		14.07
Minimum Charge	Job		269		269

Cost includes material and labor to install 18 gauge hollow metal door frame to fit a 4-1/2" jamb 8' high and up to 3' 6" opening.

9' High

Demolish	Ea.		30		30
Install	Ea.	350	54		404
Demolish and Install	Ea.	350	84		434
Reinstall	Ea.		53.76		53.76
Clean	Ea.	.96	10.10		11.06
Paint	Ea.	4.27	9.80		14.07
Minimum Charge	Job		269		269

Cost includes material and labor to install 18 gauge hollow metal door frame to fit a 4-1/2" jamb 9' high and up to 3' 6" opening.

Hardware

Doorknob w / Lock

Demolish	Ea.		21.50		21.50
Install	Ea.	295	45		340
Demolish and Install	Ea.	295	66.50		361.50
Reinstall	Ea.		35.84		35.84
Clean	Ea.	.33	12.65		12.98
Minimum Charge	Job		269		269

Includes material and labor to install keyed entry lock set, bored type including knob trim, strike and strike box for standard commercial application.

Exterior Doors and Windows

Commercial Metal Door		Unit	Material	Labor	Equip.	Total	Specification
Lever Handle							
	Demolish	Ea.		21.50		21.50	Includes material and labor to install passage lockset, keyless bored type with lever handle, non-locking standard commercial latchset.
	Install	Ea.	156	54		210	
	Demolish and Install	Ea.	156	75.50		231.50	
	Reinstall	Ea.		43.01		43.01	
	Clean	Ea.	.33	12.65		12.98	
	Minimum Charge	Job		269		269	
Deadbolt							
	Demolish	Ea.		18.65		18.65	Includes material and labor to install a deadbolt.
	Install	Ea.	142	38.50		180.50	
	Demolish and Install	Ea.	142	57.15		199.15	
	Reinstall	Ea.		30.72		30.72	
	Clean	Ea.	.33	12.65		12.98	
	Minimum Charge	Job		269		269	
Panic Device							
	Demolish	Ea.		45		45	Includes material and labor to install touch bar, low profile, exit only.
	Install	Ea.	585	89.50		674.50	
	Demolish and Install	Ea.	585	134.50		719.50	
	Reinstall	Ea.		71.68		71.68	
	Clean	Ea.	.17	22.50		22.67	
	Minimum Charge	Job		269		269	
Closer							
	Demolish	Ea.		11.20		11.20	Includes material and labor to install pneumatic heavy duty model for exterior type doors.
	Install	Ea.	390	89.50		479.50	
	Demolish and Install	Ea.	390	100.70		490.70	
	Reinstall	Ea.		71.68		71.68	
	Clean	Ea.	.17	16.85		17.02	
	Minimum Charge	Job		269		269	
Peep-Hole							
	Demolish	Ea.		10		10	Includes material and labor to install peep-hole for door.
	Install	Ea.	16.10	16.80		32.90	
	Demolish and Install	Ea.	16.10	26.80		42.90	
	Reinstall	Ea.		13.44		13.44	
	Clean	Ea.	.02	5.05		5.07	
	Minimum Charge	Job		269		269	
Exit Sign							
	Demolish	Ea.		32.50		32.50	Includes material and labor to install a wall mounted interior electric exit sign.
	Install	Ea.	127	80.50		207.50	
	Demolish and Install	Ea.	127	113		240	
	Reinstall	Ea.		64.52		64.52	
	Clean	Ea.	.02	10.25		10.27	
	Minimum Charge	Job		269		269	
Kickplate							
	Demolish	Ea.		16.60		16.60	Includes material and labor to install stainless steel kickplate, 10" x 36".
	Install	Ea.	143	36		179	
	Demolish and Install	Ea.	143	52.60		195.60	
	Reinstall	Ea.		28.67		28.67	
	Clean	Ea.	.33	12.65		12.98	
	Minimum Charge	Job		269		269	

Aluminum Window		Unit	Material	Labor	Equip.	Total	Specification
Single Hung Two Light 2' x 2'							
	Demolish	Ea.		28		28	Cost includes material and labor to install 2' x 2' single hung, two light, double glazed aluminum window including screen.
	Install	Ea.	420	110		530	
	Demolish and Install	Ea.	420	138		558	
	Reinstall	Ea.		87.74		87.74	
	Clean	Ea.	.03	11.75		11.78	
	Minimum Charge	Job		300		300	

Exterior Doors and Windows

Aluminum Window		Unit	Material	Labor	Equip.	Total	Specification
2' x 2' 6"	Demolish	Ea.		28		28	Cost includes material and labor to install 2' x 2' 6" single hung, two light, double glazed aluminum window including screen.
	Install	Ea.	490	110		600	
	Demolish and Install	Ea.	490	138		628	
	Reinstall	Ea.		87.74		87.74	
	Clean	Ea.	.03	11.75		11.78	
3' x 1' 6"	Minimum Charge	Job		300		300	Cost includes material and labor to install 3' x 1' 6" single hung, two light, double glazed aluminum window including screen.
	Demolish	Ea.		28		28	
	Install	Ea.	365	121		486	
	Demolish and Install	Ea.	365	149		514	
	Reinstall	Ea.		96.51		96.51	
3' x 2'	Clean	Ea.	.02	10.25		10.27	Cost includes material and labor to install 3' x 2' single hung, two light, double glazed aluminum window including screen.
	Minimum Charge	Job		300		300	
	Demolish	Ea.		28		28	
	Install	Ea.	560	121		681	
	Demolish and Install	Ea.	560	149		709	
3' x 2' 6"	Reinstall	Ea.		96.51		96.51	Cost includes material and labor to install 3' x 2' 6" single hung, two light, double glazed aluminum window including screen.
	Clean	Ea.	.02	10.25		10.27	
	Minimum Charge	Job		300		300	
	Demolish	Ea.		28		28	
	Install	Ea.	775	121		896	
3' x 3'	Demolish and Install	Ea.	775	149		924	Cost includes material and labor to install 3' x 3' single hung, two light, double glazed aluminum window including screen.
	Reinstall	Ea.		96.51		96.51	
	Clean	Ea.	.03	11.75		11.78	
	Minimum Charge	Job		300		300	
	Demolish	Ea.		28		28	
3' x 3' 6"	Install	Ea.	860	121		981	Cost includes material and labor to install 3' x 3' 6" single hung, two light, double glazed aluminum window including screen.
	Demolish and Install	Ea.	860	149		1009	
	Reinstall	Ea.		96.51		96.51	
	Clean	Ea.	.03	11.75		11.78	
	Minimum Charge	Job		300		300	
3' x 4'	Demolish	Ea.		28		28	Cost includes material and labor to install 3' x 4' single hung, two light, double glazed aluminum window including screen.
	Install	Ea.	900	121		1021	
	Demolish and Install	Ea.	900	149		1049	
	Reinstall	Ea.		96.51		96.51	
	Clean	Ea.	.04	13.70		13.74	
3' x 5'	Minimum Charge	Job		300		300	Cost includes material and labor to install 3' x 5' single hung, two light, double glazed aluminum window including screen.
	Demolish	Ea.		41		41	
	Install	Ea.	990	121		1111	
	Demolish and Install	Ea.	990	162		1152	
	Reinstall	Ea.		96.51		96.51	
	Clean	Ea.	.07	16.40		16.47	
	Minimum Charge	Job		300		300	

Exterior Doors and Windows

Aluminum Window		Unit	Material	Labor	Equip.	Total	Specification
3' x 6'							
	Demolish	Ea.		41		41	Cost includes material and labor to install 3' x 6' single hung, two light, double glazed aluminum window including screen.
	Install	Ea.	1200	134		1334	
	Demolish and Install	Ea.	1200	175		1375	
	Reinstall	Ea.		107.24		107.24	
	Clean	Ea.	.08	19.30		19.38	
	Minimum Charge	Job		300		300	
Double Hung Two Light							
2' x 2'							
	Demolish	Ea.		28		28	Cost includes material and labor to install 2' x 2' double hung, two light, double glazed aluminum window including screen.
	Install	Ea.	510	110		620	
	Demolish and Install	Ea.	510	138		648	
	Reinstall	Ea.		87.74		87.74	
	Clean	Ea.	.02	10.25		10.27	
	Minimum Charge	Job		300		300	
2' x 2' 6"							
	Demolish	Ea.		28		28	Cost includes material and labor to install 2' x 2' 6" double hung, two light, double glazed aluminum window including screen.
	Install	Ea.	570	110		680	
	Demolish and Install	Ea.	570	138		708	
	Reinstall	Ea.		87.74		87.74	
	Clean	Ea.	.02	10.25		10.27	
	Minimum Charge	Job		300		300	
3' x 1' 6"							
	Demolish	Ea.		28		28	Cost includes material and labor to install 3' x 1' 6" double hung, two light, double glazed aluminum window including screen.
	Install	Ea.	615	121		736	
	Demolish and Install	Ea.	615	149		764	
	Reinstall	Ea.		96.51		96.51	
	Clean	Ea.	.02	10.25		10.27	
	Minimum Charge	Job		300		300	
3' x 2'							
	Demolish	Ea.		28		28	Cost includes material and labor to install 3' x 2' double hung, two light, double glazed aluminum window including screen.
	Install	Ea.	690	121		811	
	Demolish and Install	Ea.	690	149		839	
	Reinstall	Ea.		96.51		96.51	
	Clean	Ea.	.02	10.25		10.27	
	Minimum Charge	Job		300		300	
3' x 2' 6"							
	Demolish	Ea.		28		28	Cost includes material and labor to install 3' x 2' 6" double hung, two light, double glazed aluminum window including screen.
	Install	Ea.	710	121		831	
	Demolish and Install	Ea.	710	149		859	
	Reinstall	Ea.		96.51		96.51	
	Clean	Ea.	.03	11.75		11.78	
	Minimum Charge	Job		300		300	
3' x 3'							
	Demolish	Ea.		28		28	Cost includes material and labor to install 3' x 3' double hung, two light, double glazed aluminum window including screen.
	Install	Ea.	800	121		921	
	Demolish and Install	Ea.	800	149		949	
	Reinstall	Ea.		96.51		96.51	
	Clean	Ea.	.03	11.75		11.78	
	Minimum Charge	Job		300		300	
3' x 3' 6"							
	Demolish	Ea.		28		28	Cost includes material and labor to install 3' x 3' 6" double hung, two light, double glazed aluminum window including screen.
	Install	Ea.	840	121		961	
	Demolish and Install	Ea.	840	149		989	
	Reinstall	Ea.		96.51		96.51	
	Clean	Ea.	.04	13.70		13.74	
	Minimum Charge	Job		300		300	

Exterior Doors and Windows

Aluminum Window		Unit	Material	Labor	Equip.	Total	Specification
3' x 4'	Demolish	Ea.		28		28	Cost includes material and labor to install 3' x 4' double hung, two light, double glazed aluminum window including screen.
	Install	Ea.	925	121		1046	
	Demolish and Install	Ea.	925	149		1074	
	Reinstall	Ea.		96.51		96.51	
	Clean	Ea.	.04	13.70		13.74	
	Minimum Charge	Job		300		300	
3' x 5'	Demolish	Ea.		41		41	Cost includes material and labor to install 3' x 5' double hung, two light, double glazed aluminum window including screen.
	Install	Ea.	1050	121		1171	
	Demolish and Install	Ea.	1050	162		1212	
	Reinstall	Ea.		96.51		96.51	
	Clean	Ea.	.07	16.40		16.47	
	Minimum Charge	Job		300		300	
3' x 6'	Demolish	Ea.		41		41	Cost includes material and labor to install 3' x 6' double hung, two light, double glazed aluminum window including screen.
	Install	Ea.	1175	134		1309	
	Demolish and Install	Ea.	1175	175		1350	
	Reinstall	Ea.		107.24		107.24	
	Clean	Ea.	.08	19.30		19.38	
	Minimum Charge	Job		300		300	
Sliding Sash							
1' 6" x 3'	Demolish	Ea.		28		28	Cost includes material and labor to install 1' 6" x 3' sliding sash, two light, double glazed aluminum window including screen.
	Install	Ea.	395	110		505	
	Demolish and Install	Ea.	395	138		533	
	Reinstall	Ea.		87.74		87.74	
	Clean	Ea.	.02	10.25		10.27	
	Minimum Charge	Job		300		300	
2' x 2'	Demolish	Ea.		28		28	Cost includes material and labor to install 2' x 2' sliding sash, two light, double glazed aluminum window including screen.
	Install	Ea.	730	121		851	
	Demolish and Install	Ea.	730	149		879	
	Reinstall	Ea.		96.51		96.51	
	Clean	Ea.	.02	10.25		10.27	
	Minimum Charge	Job		300		300	
3' x 2'	Demolish	Ea.		28		28	Cost includes material and labor to install 3' x 2' sliding sash, two light, double glazed aluminum window including screen.
	Install	Ea.	785	121		906	
	Demolish and Install	Ea.	785	149		934	
	Reinstall	Ea.		96.51		96.51	
	Clean	Ea.	.02	10.25		10.27	
	Minimum Charge	Job		300		300	
3' x 2' 6"	Demolish	Ea.		28		28	Cost includes material and labor to install 3' x 2' 6" sliding sash, two light, double glazed aluminum window including screen.
	Install	Ea.	825	121		946	
	Demolish and Install	Ea.	825	149		974	
	Reinstall	Ea.		96.51		96.51	
	Clean	Ea.	.03	11.75		11.78	
	Minimum Charge	Job		300		300	
3' x 3'	Demolish	Ea.		28		28	Cost includes material and labor to install 3' x 3' sliding sash, two light, double glazed aluminum window including screen.
	Install	Ea.	860	121		981	
	Demolish and Install	Ea.	860	149		1009	
	Reinstall	Ea.		96.51		96.51	
	Clean	Ea.	.03	11.75		11.78	
	Minimum Charge	Job		300		300	

Exterior Doors and Windows

Aluminum Window		Unit	Material	Labor	Equip.	Total	Specification
3' x 3' 6"							
	Demolish	Ea.		28		28	Cost includes material and labor to install 3' x 3' 6" sliding sash, two light, double glazed aluminum window including screen.
	Install	Ea.	880	121		1001	
	Demolish and Install	Ea.	880	149		1029	
	Reinstall	Ea.		96.51		96.51	
	Clean	Ea.	.04	13.70		13.74	
	Minimum Charge	Job		300		300	
3' x 4'							
	Demolish	Ea.		28		28	Cost includes material and labor to install 3' x 4' sliding sash, two light, double glazed aluminum window including screen.
	Install	Ea.	945	134		1079	
	Demolish and Install	Ea.	945	162		1107	
	Reinstall	Ea.		107.24		107.24	
	Clean	Ea.	.04	13.70		13.74	
	Minimum Charge	Job		300		300	
3' x 5'							
	Demolish	Ea.		41		41	Cost includes material and labor to install 3' x 5' sliding sash, two light, double glazed aluminum window including screen.
	Install	Ea.	1025	134		1159	
	Demolish and Install	Ea.	1025	175		1200	
	Reinstall	Ea.		107.24		107.24	
	Clean	Ea.	.07	16.40		16.47	
	Minimum Charge	Job		300		300	
4' x 5'							
	Demolish	Ea.		41		41	Cost includes material and labor to install 4' x 5' sliding sash, two light, double glazed aluminum window including screen.
	Install	Ea.	1150	172		1322	
	Demolish and Install	Ea.	1150	213		1363	
	Reinstall	Ea.		137.87		137.87	
	Clean	Ea.	.10	23.50		23.60	
	Minimum Charge	Job		300		300	
5' x 5'							
	Demolish	Ea.		41		41	Cost includes material and labor to install 5' x 5' sliding sash, two light, double glazed aluminum window including screen.
	Install	Ea.	1300	172		1472	
	Demolish and Install	Ea.	1300	213		1513	
	Reinstall	Ea.		137.87		137.87	
	Clean	Ea.	.10	23.50		23.60	
	Minimum Charge	Job		300		300	
Awning Sash							
26" x 26", 2 Light							
	Demolish	Ea.		28		28	Cost includes material and labor to install 26" x 26" two light awning, double glazed aluminum window including screen.
	Install	Ea.	920	134		1054	
	Demolish and Install	Ea.	920	162		1082	
	Reinstall	Ea.		107.24		107.24	
	Clean	Ea.	.03	11.75		11.78	
	Minimum Charge	Job		300		300	
26" x 37", 2 Light							
	Demolish	Ea.		28		28	Cost includes material and labor to install 26" x 37" two light awning, double glazed aluminum window including screen.
	Install	Ea.	735	134		869	
	Demolish and Install	Ea.	735	162		897	
	Reinstall	Ea.		107.24		107.24	
	Clean	Ea.	.03	11.75		11.78	
	Minimum Charge	Job		300		300	
38" x 26", 3 Light							
	Demolish	Ea.		28		28	Cost includes material and labor to install 38" x 26" three light awning, double glazed aluminum window including screen.
	Install	Ea.	775	134		909	
	Demolish and Install	Ea.	775	162		937	
	Reinstall	Ea.		107.24		107.24	
	Clean	Ea.	.04	13.70		13.74	
	Minimum Charge	Job		300		300	

Exterior Doors and Windows

Aluminum Window		Unit	Material	Labor	Equip.	Total	Specification
38" x 37", 3 Light							
	Demolish	Ea.		28		28	Cost includes material and labor to install 38" x 37" three light awning, double glazed aluminum window including screen.
	Install	Ea.	935	151		1086	
	Demolish and Install	Ea.	935	179		1114	
	Reinstall	Ea.		120.64		120.64	
	Clean	Ea.	.04	13.70		13.74	
	Minimum Charge	Job		300		300	
38" x 53", 3 Light							
	Demolish	Ea.		41		41	Cost includes material and labor to install 38" x 53" three light awning, double glazed aluminum window including screen.
	Install	Ea.	1300	151		1451	
	Demolish and Install	Ea.	1300	192		1492	
	Reinstall	Ea.		120.64		120.64	
	Clean	Ea.	.07	16.40		16.47	
	Minimum Charge	Job		300		300	
50" x 37", 4 Light							
	Demolish	Ea.		41		41	Cost includes material and labor to install 50" x 37" four light awning, double glazed aluminum window including screen.
	Install	Ea.	1300	151		1451	
	Demolish and Install	Ea.	1300	192		1492	
	Reinstall	Ea.		120.64		120.64	
	Clean	Ea.	.07	16.40		16.47	
	Minimum Charge	Job		300		300	
50" x 53", 4 Light							
	Demolish	Ea.		41		41	Cost includes material and labor to install 50" x 53" four light awning, double glazed aluminum window including screen.
	Install	Ea.	1575	172		1747	
	Demolish and Install	Ea.	1575	213		1788	
	Reinstall	Ea.		137.87		137.87	
	Clean	Ea.	.08	19.30		19.38	
	Minimum Charge	Job		300		300	
63" x 37", 5 Light							
	Demolish	Ea.		41		41	Cost includes material and labor to install 63" x 37" five light awning, double glazed aluminum window including screen.
	Install	Ea.	1100	172		1272	
	Demolish and Install	Ea.	1100	213		1313	
	Reinstall	Ea.		137.87		137.87	
	Clean	Ea.	.08	19.30		19.38	
	Minimum Charge	Job		300		300	
63" x 53", 5 Light							
	Demolish	Ea.		41		41	Cost includes material and labor to install 63" x 53" five light awning, double glazed aluminum window including screen.
	Install	Ea.	1700	172		1872	
	Demolish and Install	Ea.	1700	213		1913	
	Reinstall	Ea.		137.87		137.87	
	Clean	Ea.	.10	23.50		23.60	
	Minimum Charge	Job		300		300	
Mullion Bars							
	Install	Ea.	117	48.50		165.50	Includes labor and material to install mullions for sliding aluminum window.
	Minimum Charge	Job		300		300	
Bay							
4' 8" x 6' 4"							
	Demolish	Ea.		30		30	Cost includes material and labor to install 4' 8" x 6' 4" angle bay double hung unit, pine frame with aluminum cladding, picture center sash, hardware, screens.
	Install	Ea.	2475	134		2609	
	Demolish and Install	Ea.	2475	164		2639	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	.14	27.50		27.64	
	Minimum Charge	Job		300		300	

Exterior Doors and Windows

Aluminum Window		Unit	Material	Labor	Equip.	Total	Specification
4' 8" x 7' 2"							
	Demolish	Ea.		30		30	Cost includes material and labor to install 4' 8" x 7' 2" angle bay double hung unit, pine frame with aluminum cladding, picture center sash, hardware, screens.
	Install	Ea.	2525	134		2659	
	Demolish and Install	Ea.	2525	164		2689	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	.14	27.50		27.64	
	Minimum Charge	Job		300		300	
4' 8" x 7' 10"							
	Demolish	Ea.		30		30	Cost includes material and labor to install 4' 8" x 7' 10" angle bay double hung unit, pine frame with aluminum cladding, picture center sash, hardware, screens.
	Install	Ea.	2650	134		2784	
	Demolish and Install	Ea.	2650	164		2814	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	.14	27.50		27.64	
	Minimum Charge	Job		300		300	
4' 8" x 8' 6"							
	Demolish	Ea.		34.50		34.50	Cost includes material and labor to install 4' 8" x 8' 6" angle bay double hung unit, pine frame with aluminum cladding, picture center sash, hardware, screens.
	Install	Ea.	3550	154		3704	
	Demolish and Install	Ea.	3550	188.50		3738.50	
	Reinstall	Ea.		122.88		122.88	
	Clean	Ea.	.02	36.50		36.52	
	Minimum Charge	Job		300		300	
4' 8" x 8' 10"							
	Demolish	Ea.		34.50		34.50	Cost includes material and labor to install 4' 8" x 8' 10" angle bay double hung unit, pine frame with aluminum cladding, picture center sash, hardware, screens.
	Install	Ea.	3600	154		3754	
	Demolish and Install	Ea.	3600	188.50		3788.50	
	Reinstall	Ea.		122.88		122.88	
	Clean	Ea.	.02	36.50		36.52	
	Minimum Charge	Job		300		300	
4' 8" x 9' 2"							
	Demolish	Ea.		34.50		34.50	Cost includes material and labor to install 4' 8" x 9' 2" angle bay double hung unit, pine frame with aluminum cladding, picture center sash, hardware, screens.
	Install	Ea.	4200	269		4469	
	Demolish and Install	Ea.	4200	303.50		4503.50	
	Reinstall	Ea.		215.04		215.04	
	Clean	Ea.	.02	36.50		36.52	
	Minimum Charge	Job		300		300	
4' 8" x 9' 10"							
	Demolish	Ea.		34.50		34.50	Cost includes material and labor to install 4' 8" x 9' 10" angle bay double hung unit, pine frame with aluminum cladding, picture center sash, hardware, screens.
	Install	Ea.	4275	269		4544	
	Demolish and Install	Ea.	4275	303.50		4578.50	
	Reinstall	Ea.		215.04		215.04	
	Clean	Ea.	.02	36.50		36.52	
	Minimum Charge	Job		300		300	
Casing							
	Demolish	Ea.		12.45		12.45	Cost includes material and labor to install 1 1/16" x 2-1/2" pine ranch style window casing.
	Install	Opng.	58.50	41.50		100	
	Demolish and Install	Opng.	58.50	53.95		112.45	
	Reinstall	Opng.		33.08		33.08	
	Clean	Opng.	.46	4.05		4.51	
	Paint	Ea.	11.20	8.80		20	
	Minimum Charge	Job		300		300	
Storm Window							
2' x 3' 6"							
	Demolish	Ea.		16.65		16.65	Includes material and labor to install residential aluminum storm window with mill finish, 2' x 3' 6" high.
	Install	Ea.	560	36		596	
	Demolish and Install	Ea.	560	52.65		612.65	
	Reinstall	Ea.		28.67		28.67	
	Clean	Ea.	.02	10.25		10.27	
	Minimum Charge	Job		300		300	

Exterior Doors and Windows

Aluminum Window		Unit	Material	Labor	Equip.	Total	Specification
2' 6" x 5'							
	Demolish	Ea.		16.65		16.65	Includes material and labor to install residential aluminum storm window with mill finish, 2' 6" x 5' high.
	Install	Ea.	770	38.50		808.50	
	Demolish and Install	Ea.	770	55.15		825.15	
	Reinstall	Ea.		30.72		30.72	
	Clean	Ea.	.04	13.70		13.74	
	Minimum Charge	Job		300		300	
4' x 6'							
	Demolish	Ea.		32		32	Includes material and labor to install residential aluminum storm window, 4' x 6' high.
	Install	Ea.	930	43		973	
	Demolish and Install	Ea.	930	75		1005	
	Reinstall	Ea.		34.41		34.41	
	Clean	Ea.	.10	20.50		20.60	
	Minimum Charge	Job		300		300	
Hardware							
Weatherstripping							
	Install	L.F.	.83	4.48		5.31	Includes labor and material to install vinyl V strip weatherstripping for double-hung window.
	Minimum Charge	Job		179		179	
Trim Set							
	Demolish	Ea.		12.45		12.45	Cost includes material and labor to install 1 1/16" x 2-1/2" pine ranch style window casing.
	Install	Opng.	58.50	41.50		100	
	Demolish and Install	Opng.	58.50	53.95		112.45	
	Reinstall	Opng.		33.08		33.08	
	Clean	Opng.	.46	4.05		4.51	
	Paint	Ea.	11.20	8.80		20	
	Minimum Charge	Job		269		269	

Vinyl Window		Unit	Material	Labor	Equip.	Total	Specification
Double Hung							
2' x 2' 6"							
	Demolish	Ea.		20.50		20.50	Cost includes material and labor to install 2' x 2' 6" double hung, two light, vinyl window with screen.
	Install	Ea.	475	71.50		546.50	
	Demolish and Install	Ea.	475	92		567	
	Reinstall	Ea.		57.34		57.34	
	Clean	Ea.	.02	10.25		10.27	
	Minimum Charge	Job		179		179	
2' x 3' 6"							
	Demolish	Ea.		20.50		20.50	Cost includes material and labor to install 2' x 3' 6" double hung, two light, vinyl window with screen.
	Install	Ea.	425	77		502	
	Demolish and Install	Ea.	425	97.50		522.50	
	Reinstall	Ea.		61.44		61.44	
	Clean	Ea.	.03	11.75		11.78	
	Minimum Charge	Job		179		179	
2' 6" x 4' 6"							
	Demolish	Ea.		20.50		20.50	Cost includes material and labor to install 2' 6" x 4' 6" double hung, two light, vinyl window with screen.
	Install	Ea.	515	82.50		597.50	
	Demolish and Install	Ea.	515	103		618	
	Reinstall	Ea.		66.17		66.17	
	Clean	Ea.	.04	13.70		13.74	
	Minimum Charge	Job		179		179	
3' x 4'							
	Demolish	Ea.		20.50		20.50	Includes material and labor to install medium size double hung, 3' x 4', two light, vinyl window with screen.
	Install	Ea.	530	108		638	
	Demolish and Install	Ea.	530	128.50		658.50	
	Reinstall	Ea.		86.02		86.02	
	Clean	Ea.	.04	13.70		13.74	
	Minimum Charge	Job		179		179	

Exterior Doors and Windows

Vinyl Window		Unit	Material	Labor	Equip.	Total	Specification
3' x 4' 6"							
	Demolish	Ea.		25		25	Cost includes material and labor to install 3' x 4' 6" double hung, two light, vinyl window with screen.
	Install	Ea.	585	119		704	
	Demolish and Install	Ea.	585	144		729	
	Reinstall	Ea.		95.57		95.57	
	Clean	Ea.	.07	16.40		16.47	
	Minimum Charge	Job		179		179	
4' x 4' 6"							
	Demolish	Ea.		25		25	Cost includes material and labor to install 4' x 4' 6" double hung, two light, vinyl window with screen.
	Install	Ea.	595	134		729	
	Demolish and Install	Ea.	595	159		754	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	.08	19.30		19.38	
	Minimum Charge	Job		179		179	
4' x 6'							
	Demolish	Ea.		25		25	Includes material and labor to install large double hung, 4' x 6', two light, vinyl window with screen.
	Install	Ea.	670	154		824	
	Demolish and Install	Ea.	670	179		849	
	Reinstall	Ea.		122.88		122.88	
	Clean	Ea.	.10	23.50		23.60	
	Minimum Charge	Job		179		179	
Trim Set							
	Demolish	Ea.		12.45		12.45	Cost includes material and labor to install 1 1/16" x 2-1/2" pine ranch style window casing.
	Install	Opng.	58.50	41.50		100	
	Demolish and Install	Opng.	58.50	53.95		112.45	
	Reinstall	Opng.		33.08		33.08	
	Clean	Opng.	.46	4.05		4.51	
	Paint	Ea.	11.20	8.80		20	
	Minimum Charge	Job		300		300	

Wood Window		Unit	Material	Labor	Equip.	Total	Specification
Double Hung							
2' 2" x 3' 4"							
	Demolish	Ea.		20.50		20.50	Cost includes material and labor to install 2' 2" x 3' 4" double hung, two light, double glazed wood window with screen.
	Install	Ea.	515	71.50		586.50	
	Demolish and Install	Ea.	515	92		607	
	Reinstall	Ea.		57.34		57.34	
	Clean	Ea.	.03	11.75		11.78	
	Paint	Ea.	7.05	18.35		25.40	
	Minimum Charge	Job		269		269	
2' 2" x 4' 4"							
	Demolish	Ea.		20.50		20.50	Cost includes material and labor to install 2' 2" x 4' 4" double hung, two light, double glazed wood window with screen.
	Install	Ea.	635	77		712	
	Demolish and Install	Ea.	635	97.50		732.50	
	Reinstall	Ea.		61.44		61.44	
	Clean	Ea.	.03	11.75		11.78	
	Paint	Ea.	7.05	18.35		25.40	
	Minimum Charge	Job		269		269	
2' 6" x 3' 4"							
	Demolish	Ea.		20.50		20.50	Cost includes material and labor to install 2' 6" x 3' 4" double hung, two light, double glazed wood window with screen.
	Install	Ea.	565	82.50		647.50	
	Demolish and Install	Ea.	565	103		668	
	Reinstall	Ea.		66.17		66.17	
	Clean	Ea.	.04	13.70		13.74	
	Paint	Ea.	9	22		31	
	Minimum Charge	Job		269		269	

Exterior Doors and Windows

Wood Window		Unit	Material	Labor	Equip.	Total	Specification
2' 6" x 4'							
	Demolish	Ea.		20.50		20.50	Cost includes material and labor to install 2' 6" x 4' double hung, two light, double glazed wood window with screen.
	Install	Ea.	1175	89.50		1264.50	
	Demolish and Install	Ea.	1175	110		1285	
	Reinstall	Ea.		71.68		71.68	
	Clean	Ea.	.04	13.70		13.74	
	Paint	Ea.	9	22		31	
	Minimum Charge	Job		269		269	
2' 6" x 4' 8"							
	Demolish	Ea.		20.50		20.50	Cost includes material and labor to install 2' 6" x 4' 8" double hung, two light, double glazed wood window with screen.
	Install	Ea.	460	89.50		549.50	
	Demolish and Install	Ea.	460	110		570	
	Reinstall	Ea.		71.68		71.68	
	Clean	Ea.	.04	13.70		13.74	
	Paint	Ea.	9	22		31	
	Minimum Charge	Job		269		269	
2' 10" x 3' 4"							
	Demolish	Ea.		20.50		20.50	Cost includes material and labor to install 2' 10" x 3' 4" double hung, two light, double glazed wood window with screen.
	Install	Ea.	640	108		748	
	Demolish and Install	Ea.	640	128.50		768.50	
	Reinstall	Ea.		86.02		86.02	
	Clean	Ea.	.04	13.70		13.74	
	Paint	Ea.	9	22		31	
	Minimum Charge	Job		269		269	
2' 10" x 4'							
	Demolish	Ea.		20.50		20.50	Cost includes material and labor to install 2' 10" x 4' double hung, two light, double glazed wood window with screen.
	Install	Ea.	1300	108		1408	
	Demolish and Install	Ea.	1300	128.50		1428.50	
	Reinstall	Ea.		86.02		86.02	
	Clean	Ea.	.04	13.70		13.74	
	Paint	Ea.	9	22		31	
	Minimum Charge	Job		269		269	
3' 7" x 3' 4"							
	Demolish	Ea.		20.50		20.50	Cost includes material and labor to install 3' 7" x 3' 4" double hung, two light, double glazed wood window with screen.
	Install	Ea.	1125	119		1244	
	Demolish and Install	Ea.	1125	139.50		1264.50	
	Reinstall	Ea.		95.57		95.57	
	Clean	Ea.	.04	13.70		13.74	
	Paint	Ea.	9	22		31	
	Minimum Charge	Job		269		269	
3' 7" x 5' 4"							
	Demolish	Ea.		25		25	Cost includes material and labor to install 3' 7" x 5' 4" double hung, two light, double glazed wood window with screen.
	Install	Ea.	950	119		1069	
	Demolish and Install	Ea.	950	144		1094	
	Reinstall	Ea.		95.57		95.57	
	Clean	Ea.	.10	23.50		23.60	
	Paint	Ea.	15	36.50		51.50	
	Minimum Charge	Job		269		269	
4' 3" x 5' 4"							
	Demolish	Ea.		25		25	Cost includes material and labor to install 4' 3" x 5' 4" double hung, two light, double glazed wood window with screen.
	Install	Ea.	980	134		1114	
	Demolish and Install	Ea.	980	159		1139	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	.10	23.50		23.60	
	Paint	Ea.	65.50	44		109.50	
	Minimum Charge	Job		269		269	

Exterior Doors and Windows

Wood Window		Unit	Material	Labor	Equip.	Total	Specification
Casement							
2' x 3' 4"							
	Demolish	Ea.		20.50		20.50	Cost includes material and labor to install 2' x 3' 4" casement window with 3/4" insulated glass, screens, weatherstripping, hardware.
	Install	Ea.	1150	54		1204	
	Demolish and Install	Ea.	1150	74.50		1224.50	
	Reinstall	Ea.		43.01		43.01	
	Clean	Ea.	.03	11.75		11.78	
	Paint	Ea.	7.05	18.35		25.40	
	Minimum Charge	Job		540		540	
2' x 4'							
	Demolish	Ea.		20.50		20.50	Cost includes material and labor to install 2' x 4' casement window with 3/4" insulated glass, screens, weatherstripping, hardware.
	Install	Ea.	1100	59.50		1159.50	
	Demolish and Install	Ea.	1100	80		1180	
	Reinstall	Ea.		47.79		47.79	
	Clean	Ea.	.03	11.75		11.78	
	Paint	Ea.	7.05	18.35		25.40	
	Minimum Charge	Job		540		540	
2' x 5'							
	Demolish	Ea.		20.50		20.50	Cost includes material and labor to install 2' x 5' casement window with 3/4" insulated glass, screens, weatherstripping, hardware.
	Install	Ea.	1275	63.50		1338.50	
	Demolish and Install	Ea.	1275	84		1359	
	Reinstall	Ea.		50.60		50.60	
	Clean	Ea.	.04	13.70		13.74	
	Paint	Ea.	9	22		31	
	Minimum Charge	Job		540		540	
2' x 6'							
	Demolish	Ea.		20.50		20.50	Cost includes material and labor to install 2' x 6' casement window with 3/4" insulated glass, screens, weatherstripping, hardware.
	Install	Ea.	1400	67		1467	
	Demolish and Install	Ea.	1400	87.50		1487.50	
	Reinstall	Ea.		53.76		53.76	
	Clean	Ea.	.04	13.70		13.74	
	Paint	Ea.	9	22		31	
	Minimum Charge	Job		540		540	
4' x 3' 4"							
	Demolish	Ea.		25		25	Cost includes material and labor to install 4' x 3' 4" casement windows with 3/4" insulated glass, screens, weatherstripping, hardware.
	Install	Ea.	2350	71.50		2421.50	
	Demolish and Install	Ea.	2350	96.50		2446.50	
	Reinstall	Ea.		57.34		57.34	
	Clean	Ea.	.04	13.70		13.74	
	Paint	Ea.	33	22		55	
	Minimum Charge	Job		540		540	
4' x 4'							
	Demolish	Ea.		25		25	Cost includes material and labor to install 4' x 4' casement windows with 3/4" insulated glass, screens, weatherstripping, hardware.
	Install	Ea.	2950	71.50		3021.50	
	Demolish and Install	Ea.	2950	96.50		3046.50	
	Reinstall	Ea.		57.34		57.34	
	Clean	Ea.	.08	19.30		19.38	
	Paint	Ea.	39	27.50		66.50	
	Minimum Charge	Job		540		540	
4' x 5'							
	Demolish	Ea.		25		25	Cost includes material and labor to install 4' x 5' casement windows with 3/4" insulated glass, screens, weatherstripping, hardware.
	Install	Ea.	2975	77		3052	
	Demolish and Install	Ea.	2975	102		3077	
	Reinstall	Ea.		61.44		61.44	
	Clean	Ea.	.10	23.50		23.60	
	Paint	Ea.	50.50	36.50		87	
	Minimum Charge	Job		540		540	

Exterior Doors and Windows

Wood Window		Unit	Material	Labor	Equip.	Total	Specification
4' x 6'							
	Demolish	Ea.		25		25	Cost includes material and labor to install 4' x 6' casement windows with 3/4" insulated glass, screens, weatherstripping, hardware.
	Install	Ea.	3200	89.50		3289.50	
	Demolish and Install	Ea.	3200	114.50		3314.50	
	Reinstall	Ea.		71.68		71.68	
	Clean	Ea.	.10	23.50		23.60	
	Paint	Ea.	60	44		104	
	Minimum Charge	Job		540		540	
Casement Bow							
4' 8" x 8' 1"							
	Demolish	Ea.		34.50		34.50	Includes material and labor to install casement bow window unit with 4 lights, pine frame, 1/2" insulated glass, weatherstripping, hardware, screens.
	Install	Ea.	5975	202		6177	
	Demolish and Install	Ea.	5975	236.50		6211.50	
	Reinstall	Ea.		161.28		161.28	
	Clean	Ea.	.14	27.50		27.64	
	Paint	Ea.	110	88		198	
	Minimum Charge	Job		540		540	
4' 8" x 10'							
	Demolish	Ea.		34.50		34.50	Includes material and labor to install casement bow window unit with 5 lights, pine frame, 1/2" insulated glass, weatherstripping, hardware, screens.
	Install	Ea.	6750	269		7019	
	Demolish and Install	Ea.	6750	303.50		7053.50	
	Reinstall	Ea.		215.04		215.04	
	Clean	Ea.	.02	36.50		36.52	
	Paint	Ea.	138	110		248	
	Minimum Charge	Job		540		540	
5' 4" x 8' 1"							
	Demolish	Ea.		34.50		34.50	Includes material and labor to install casement bow window unit with 4 lights, pine frame, 1/2" insulated glass, weatherstripping, hardware, screens.
	Install	Ea.	6100	202		6302	
	Demolish and Install	Ea.	6100	236.50		6336.50	
	Reinstall	Ea.		161.28		161.28	
	Clean	Ea.	.02	36.50		36.52	
	Paint	Ea.	125	88		213	
	Minimum Charge	Job		540		540	
5' 4" x 10'							
	Demolish	Ea.		34.50		34.50	Includes material and labor to install casement bow window unit with 5 lights, pine frame, 1/2" insulated glass, weatherstripping, hardware, screens.
	Install	Ea.	6475	269		6744	
	Demolish and Install	Ea.	6475	303.50		6778.50	
	Reinstall	Ea.		215.04		215.04	
	Clean	Ea.	.02	36.50		36.52	
	Paint	Ea.	158	110		268	
	Minimum Charge	Job		540		540	
6' x 8' 1"							
	Demolish	Ea.		34.50		34.50	Includes material and labor to install casement bow window unit with 5 lights, pine frame, 1/2" insulated glass, weatherstripping, hardware, screens.
	Install	Ea.	6750	269		7019	
	Demolish and Install	Ea.	6750	303.50		7053.50	
	Reinstall	Ea.		215.04		215.04	
	Clean	Ea.	.02	36.50		36.52	
	Paint	Ea.	143	110		253	
	Minimum Charge	Job		540		540	
6' x 10'							
	Demolish	Ea.		34.50		34.50	Includes material and labor to install casement bow window unit with 5 lights, pine frame, 1/2" insulated glass, weatherstripping, hardware, screens.
	Install	Ea.	6950	269		7219	
	Demolish and Install	Ea.	6950	303.50		7253.50	
	Reinstall	Ea.		215.04		215.04	
	Clean	Ea.	.02	36.50		36.52	
	Paint	Ea.	179	147		326	
	Minimum Charge	Job		540		540	

Exterior Doors and Windows

Wood Window		Unit	Material	Labor	Equip.	Total	Specification
Casing							
	Demolish	Ea.		12.45		12.45	Cost includes material and labor to install 1 1/16" x 2-1/2" pine ranch style window casing.
	Install	Opng.	58.50	41.50		100	
	Demolish and Install	Opng.	58.50	53.95		112.45	
	Reinstall	Opng.		33.08		33.08	
	Clean	Opng.	.46	4.05		4.51	
	Paint	Ea.	11.20	8.80		20	
	Minimum Charge	Job		300		300	
Trim Set							
	Demolish	Ea.		9.50		9.50	Cost includes material and labor to install 1 1/16" x 2-1/2" pine ranch style window casing.
	Install	Opng.	58.50	41.50		100	
	Demolish and Install	Opng.	58.50	51		109.50	
	Reinstall	Opng.		33.08		33.08	
	Clean	Opng.	.46	4.05		4.51	
	Paint	Ea.	11.20	8.80		20	
	Minimum Charge	Job		269		269	
Wood Picture Window							
3' 6" x 4'							
	Demolish	Ea.		25		25	Includes material and labor to install a wood framed picture window including exterior trim.
	Install	Ea.	330	89.50		419.50	
	Demolish and Install	Ea.	330	114.50		444.50	
	Clean	Ea.	.10	23.50		23.60	
	Paint	Ea.	6.35	34		40.35	
	Minimum Charge	Job		540		540	
4' x 4' 6"							
	Demolish	Ea.		25		25	Includes material and labor to install a wood framed picture window including exterior trim.
	Install	Ea.	625	98		723	
	Demolish and Install	Ea.	625	123		748	
	Clean	Ea.	.10	23.50		23.60	
	Paint	Ea.	6.35	34		40.35	
	Minimum Charge	Job		540		540	
5' x 4'							
	Demolish	Ea.		25		25	Includes material and labor to install a wood framed picture window including exterior trim.
	Install	Ea.	665	98		763	
	Demolish and Install	Ea.	665	123		788	
	Clean	Ea.	.10	23.50		23.60	
	Paint	Ea.	13.50	55		68.50	
	Minimum Charge	Job		540		540	
6' x 4' 6"							
	Demolish	Ea.		25		25	Includes material and labor to install a wood framed picture window including exterior trim.
	Install	Ea.	610	108		718	
	Demolish and Install	Ea.	610	133		743	
	Clean	Ea.	.10	23.50		23.60	
	Paint	Ea.	13.50	55		68.50	
	Minimum Charge	Job		540		540	

Window Screens		Unit	Material	Labor	Equip.	Total	Specification
Small							
	Demolish	Ea.		4.69		4.69	Includes material and labor to install small window screen, 4 S.F.
	Install	Ea.	50.50	16.30		66.80	
	Demolish and Install	Ea.	50.50	20.99		71.49	
	Reinstall	Ea.		13.03		13.03	
	Clean	Ea.	.33	8.45		8.78	
	Minimum Charge	Job		134		134	

Exterior Doors and Windows

Window Screens		Unit	Material	Labor	Equip.	Total	Specification
Standard Size	Demolish	Ea.		4.69		4.69	Includes material and labor to install medium window screen, 12 S.F.
	Install	Ea.	113	16.30		129.30	
	Demolish and Install	Ea.	113	20.99		133.99	
	Reinstall	Ea.		13.03		13.03	
	Clean	Ea.	.33	8.45		8.78	
	Minimum Charge	Job		134		134	
Large	Demolish	Ea.		4.69		4.69	Includes material and labor to install large window screen, 16 S.F.
	Install	Ea.	151	16.30		167.30	
	Demolish and Install	Ea.	151	20.99		171.99	
	Reinstall	Ea.		13.03		13.03	
	Clean	Ea.	.33	8.45		8.78	
	Minimum Charge	Job		134		134	

Window Glass		Unit	Material	Labor	Equip.	Total	Specification
Plate, Clear, 1/4"	Demolish	S.F.		2.25		2.25	Includes material and labor to install clear glass.
	Install	S.F.	16.90	8.70		25.60	
	Demolish and Install	S.F.	16.90	10.95		27.85	
	Reinstall	S.F.		6.96		6.96	
	Clean	S.F.	.02	.24		.26	
	Minimum Charge	Job		261		261	
Insulated	Demolish	S.F.		2.25		2.25	Includes material and labor to install insulated glass.
	Install	S.F.	47	14.90		61.90	
	Demolish and Install	S.F.	47	17.15		64.15	
	Reinstall	S.F.		11.93		11.93	
	Clean	S.F.	.02	.24		.26	
	Minimum Charge	Job		261		261	
Tinted	Demolish	S.F.		2.25		2.25	Includes material and labor to install tinted glass.
	Install	S.F.	10.05	8.05		18.10	
	Demolish and Install	S.F.	10.05	10.30		20.35	
	Reinstall	S.F.		6.42		6.42	
	Clean	S.F.	.02	.24		.26	
	Minimum Charge	Job		261		261	
Obscure / Florentine	Demolish	S.F.		2.25		2.25	Includes material and labor to install obscure glass.
	Install	S.F.	42.50	7.45		49.95	
	Demolish and Install	S.F.	42.50	9.70		52.20	
	Reinstall	S.F.		5.97		5.97	
	Clean	S.F.	.02	.24		.26	
	Minimum Charge	Job		261		261	
Laminated Safety	Demolish	S.F.		2.25		2.25	Includes material and labor to install clear laminated glass.
	Install	S.F.	39	11.60		50.60	
	Demolish and Install	S.F.	39	13.85		52.85	
	Reinstall	S.F.		9.28		9.28	
	Clean	S.F.	.02	.24		.26	
	Minimum Charge	Job		261		261	

Exterior Doors and Windows

Window Glass		Unit	Material	Labor	Equip.	Total	Specification
Wired							
	Demolish	S.F.		2.25		2.25	Includes material and labor to install rough obscure wire glass.
	Install	S.F.	33.50	7.75		41.25	
	Demolish and Install	S.F.	33.50	10		43.50	
	Reinstall	S.F.		6.19		6.19	
	Clean	S.F.	.02	.24		.26	
	Minimum Charge	Job		261		261	
Tempered							
	Demolish	S.F.		2.25		2.25	Includes material and labor to install clear glass.
	Install	S.F.	16.90	8.70		25.60	
	Demolish and Install	S.F.	16.90	10.95		27.85	
	Reinstall	S.F.		6.96		6.96	
	Clean	S.F.	.02	.24		.26	
	Minimum Charge	Job		261		261	
Stained							
	Demolish	S.F.		2.25		2.25	Includes material and labor to install stained glass.
	Install	S.F.	86.50	8.70		95.20	
	Demolish and Install	S.F.	86.50	10.95		97.45	
	Reinstall	S.F.		6.96		6.96	
	Clean	S.F.	.02	.24		.26	
	Minimum Charge	Job		261		261	
Etched							
	Demolish	S.F.		2.25		2.25	Includes material and labor to install etched glass.
	Install	S.F.	71.50	8.70		80.20	
	Demolish and Install	S.F.	71.50	10.95		82.45	
	Reinstall	S.F.		6.96		6.96	
	Clean	S.F.	.02	.24		.26	
	Minimum Charge	Job		261		261	
Wall Mirror							
	Demolish	S.F.		2.25		2.25	Includes material and labor to install distortion-free float glass mirror, 1/4" thick, cut and polished edges. .
	Install	S.F.	29.50	8.35		37.85	
	Demolish and Install	S.F.	29.50	10.60		40.10	
	Reinstall	S.F.		6.68		6.68	
	Clean	S.F.	.02	.24		.26	
	Minimum Charge	Job		261		261	
Bullet Resistant							
	Demolish	S.F.		2.25		2.25	Includes material and labor to install bullet resistant clear laminated glass.
	Install	S.F.	430	104		534	
	Demolish and Install	S.F.	430	106.25		536.25	
	Reinstall	S.F.		83.52		83.52	
	Clean	S.F.	.02	.24		.26	
	Minimum Charge	Job		261		261	

Storefront System		Unit	Material	Labor	Equip.	Total	Specification
Clear Glass							
Stub Wall to 8'							
	Demolish	S.F.		3.51		3.51	Includes material and labor to install commercial grade 4-1/2" section, anodized aluminum with clear glass in upper section and safety glass in lower section.
	Install	S.F.	34	14.50		48.50	
	Demolish and Install	S.F.	34	18.01		52.01	
	Reinstall	S.F.		11.59		11.59	
	Clean	S.F.		.55		.55	
	Minimum Charge	Job		300		300	

Exterior Doors and Windows

Storefront System		Unit	Material	Labor	Equip.	Total	Specification
Floor to 10'							
	Demolish	S.F.		3.51		3.51	Includes material and labor to install commercial grade 4-1/2" section, anodized aluminum with clear glass in upper section and safety glass in lower section.
	Install	S.F.	34.50	14.50		49	
	Demolish and Install	S.F.	34.50	18.01		52.51	
	Reinstall	S.F.		11.59		11.59	
	Clean	S.F.		.55		.55	
	Minimum Charge	Job		300		300	
Polished Plate Glass							
Stub Wall to 9'							
	Demolish	S.F.		3.51		3.51	Cost includes material and labor to install 4' x 9' polished plate glass window built on 8" stub wall.
	Install	S.F.	21.50	14.50		36	
	Demolish and Install	S.F.	21.50	18.01		39.51	
	Reinstall	S.F.		11.59		11.59	
	Clean	S.F.		.55		.55	
	Minimum Charge	Job		300		300	
Stub Wall to 13'							
	Demolish	S.F.		3.51		3.51	Cost includes material and labor to install 4' x 13' polished plate glass window built on 8" stub wall.
	Install	S.F.	24	14.50		38.50	
	Demolish and Install	S.F.	24	18.01		42.01	
	Reinstall	S.F.		11.59		11.59	
	Clean	S.F.		.55		.55	
	Minimum Charge	Job		300		300	
Floor to 9'							
	Demolish	S.F.		3.51		3.51	Cost includes material and labor to install 4' x 9' polished plate glass window built on floor.
	Install	S.F.	25.50	14.50		40	
	Demolish and Install	S.F.	25.50	18.01		43.51	
	Reinstall	S.F.		11.59		11.59	
	Clean	S.F.		.55		.55	
	Minimum Charge	Job		300		300	
Floor to 13'							
	Demolish	S.F.		3.51		3.51	Cost includes material and labor to install 4' x 13' polished plate glass window built on floor.
	Install	S.F.	27	14.50		41.50	
	Demolish and Install	S.F.	27	18.01		45.01	
	Reinstall	S.F.		11.59		11.59	
	Clean	S.F.		.55		.55	
	Minimum Charge	Job		300		300	
Clear Plate Glass							
Floor to 9'							
	Demolish	S.F.		3.51		3.51	Cost includes material and labor to install 4' x 9' clear plate glass window built on floor.
	Install	S.F.	36	14.50		50.50	
	Demolish and Install	S.F.	36	18.01		54.01	
	Reinstall	S.F.		11.59		11.59	
	Clean	S.F.		.55		.55	
	Minimum Charge	Job		300		300	
Floor to 11'							
	Demolish	S.F.		3.51		3.51	Cost includes material and labor to install 4' x 11' clear plate glass window built on floor.
	Install	S.F.	35	14.50		49.50	
	Demolish and Install	S.F.	35	18.01		53.01	
	Reinstall	S.F.		11.59		11.59	
	Clean	S.F.		.55		.55	
	Minimum Charge	Job		300		300	
Floor to 13'							
	Demolish	S.F.		3.51		3.51	Cost includes material and labor to install 4' x 13' clear plate glass window built on floor.
	Install	S.F.	34.50	14.50		49	
	Demolish and Install	S.F.	34.50	18.01		52.51	
	Reinstall	S.F.		11.59		11.59	
	Clean	S.F.		.55		.55	
	Minimum Charge	Job		300		300	

Exterior Doors and Windows

Storefront System		Unit	Material	Labor	Equip.	Total	Specification
Entrance							
Narrow Stile 3' x 7"							
	Demolish	Ea.		30		30	Cost includes material and labor to install 3' x 7' narrow stile door, center pivot concealed closer.
	Install	Ea.	3775	360		4135	
	Demolish and Install	Ea.	3775	390		4165	
	Reinstall	Ea.		286.72		286.72	
	Clean	Ea.	4.09	50.50		54.59	
	Minimum Charge	Job		300		300	
Tempered Glass							
	Demolish	Ea.		30		30	Cost includes material and labor to install 3' x 7' tempered glass door, center pivot concealed closer.
	Install	Ea.	6850	650		7500	
	Demolish and Install	Ea.	6850	680		7530	
	Reinstall	Ea.		521.69		521.69	
	Clean	Ea.	4.09	50.50		54.59	
	Minimum Charge	Job		300		300	
Heavy Section							
	Demolish	Ea.		30		30	Includes material and labor to install wide stile door with 3' 6" x 7' opening.
	Install	Ea.	3400	605		4005	
	Demolish and Install	Ea.	3400	635		4035	
	Reinstall	Ea.		482.56		482.56	
	Clean	Ea.	.81	16.85		17.66	
	Minimum Charge	Job		1050		1050	

Curtain Wall System		Unit	Material	Labor	Equip.	Total	Specification
Regular Weight							
Bronze Anodized							
	Demolish	S.F.		3.51		3.51	Includes material and labor to install structural curtain wall system with bronze anodized frame of regular weight, float glass.
	Install	S.F.	55.50	14.50		70	
	Demolish and Install	S.F.	55.50	18.01		73.51	
	Clean	S.F.		.55		.55	
	Minimum Charge	Job		269		269	
Black Anodized							
	Demolish	S.F.		3.51		3.51	Includes material and labor to install structural curtain wall system with black anodized frame of regular weight, float glass.
	Install	S.F.	60.50	14.50		75	
	Demolish and Install	S.F.	60.50	18.01		78.51	
	Clean	S.F.		.55		.55	
	Minimum Charge	Job		269		269	
Heavy Weight							
Bronze Anodized							
	Demolish	S.F.		3.51		3.51	Includes material and labor to install structural curtain wall system with bronze anodized frame of regular weight, float glass.
	Install	S.F.	55.50	14.50		70	
	Demolish and Install	S.F.	55.50	18.01		73.51	
	Clean	S.F.		.55		.55	
	Minimum Charge	Job		269		269	
Black Anodized							
	Demolish	S.F.		3.51		3.51	Includes material and labor to install structural curtain wall system with black anodized frame of heavy weight, float glass.
	Install	S.F.	58	14.50		72.50	
	Demolish and Install	S.F.	58	18.01		76.01	
	Clean	S.F.		.55		.55	
	Minimum Charge	Job		269		269	
Glass							
1" Insulated							
	Install	S.F.	28	13.90		41.90	Cost includes labor and material to install 1" insulated glass.
	Minimum Charge	Job		261		261	



Exterior Doors and Windows

Skylight		Unit	Material	Labor	Equip.	Total	Specification
Dome							
22" x 22"							
	Demolish	Ea.		105		105	Cost includes material and labor to install 22" x 22" fixed dome skylight.
	Install	Ea.	340	166		506	
	Demolish and Install	Ea.	340	271		611	
	Reinstall	Ea.		132.59		132.59	
	Clean	Ea.	.36	14.45		14.81	
	Minimum Charge	Job		995		995	
22" x 46"							
	Demolish	Ea.		105		105	Cost includes material and labor to install 22" x 46" fixed dome skylight.
	Install	Ea.	405	199		604	
	Demolish and Install	Ea.	405	304		709	
	Reinstall	Ea.		159.10		159.10	
	Clean	Ea.		22.50		22.50	
	Minimum Charge	Job		995		995	
30" x 30"							
	Demolish	Ea.		105		105	Cost includes material and labor to install 30" x 30" fixed dome skylight.
	Install	Ea.	545	166		711	
	Demolish and Install	Ea.	545	271		816	
	Reinstall	Ea.		132.59		132.59	
	Clean	Ea.		22.50		22.50	
	Minimum Charge	Job		995		995	
30" x 46"							
	Demolish	Ea.		105		105	Cost includes material and labor to install 30" x 46" fixed dome skylight.
	Install	Ea.	560	199		759	
	Demolish and Install	Ea.	560	304		864	
	Reinstall	Ea.		159.10		159.10	
	Clean	Ea.		22.50		22.50	
	Minimum Charge	Job		995		995	
Fixed							
22" x 27"							
	Demolish	Ea.		105		105	Includes material and labor to install double glazed skylight, 22" x 27", fixed.
	Install	Ea.	445	166		611	
	Demolish and Install	Ea.	445	271		716	
	Reinstall	Ea.		132.59		132.59	
	Clean	Ea.	.36	14.45		14.81	
	Minimum Charge	Job		995		995	
22" x 46"							
	Demolish	Ea.		105		105	Includes material and labor to install double glazed skylight, 22" x 46", fixed.
	Install	Ea.	435	166		601	
	Demolish and Install	Ea.	435	271		706	
	Reinstall	Ea.		132.59		132.59	
	Clean	Ea.		22.50		22.50	
	Minimum Charge	Job		995		995	
44" x 46"							
	Demolish	Ea.		105		105	Includes material and labor to install double glazed skylight, 44" x 46", fixed.
	Install	Ea.	715	199		914	
	Demolish and Install	Ea.	715	304		1019	
	Reinstall	Ea.		159.10		159.10	
	Clean	Ea.		25.50		25.50	
	Minimum Charge	Job		995		995	
Operable							
22" x 27"							
	Demolish	Ea.		105		105	Includes material and labor to install double glazed skylight, 22" x 27", operable.
	Install	Ea.	810	166		976	
	Demolish and Install	Ea.	810	271		1081	
	Reinstall	Ea.		132.59		132.59	
	Clean	Ea.	.36	14.45		14.81	
	Minimum Charge	Job		995		995	

Exterior Doors and Windows

Skylight		Unit	Material	Labor	Equip.	Total	Specification
22" x 46"							
	Demolish	Ea.		105		105	Includes material and labor to install double glazed skylight, 22" x 46", operable.
	Install	Ea.	800	199		999	
	Demolish and Install	Ea.	800	304		1104	
	Reinstall	Ea.		159.10		159.10	
	Clean	Ea.		22.50		22.50	
	Minimum Charge	Job		995		995	
44" x 46"							
	Demolish	Ea.		105		105	Includes material and labor to install double glazed skylight, 44" x 46", operable.
	Install	Ea.	1050	199		1249	
	Demolish and Install	Ea.	1050	304		1354	
	Reinstall	Ea.		159.10		159.10	
	Clean	Ea.		25.50		25.50	
	Minimum Charge	Job		995		995	

Industrial Steel Window		Unit	Material	Labor	Equip.	Total	Specification
100% Fixed							
	Demolish	S.F.		2.88		2.88	Includes material and labor to install commercial grade steel windows, including glazing.
	Install	S.F.	117	6.05		123.05	
	Demolish and Install	S.F.	117	8.93		125.93	
	Reinstall	S.F.		4.83		4.83	
	Clean	Ea.	.14	1.71		1.85	
	Paint	S.F.	.40	.98		1.38	
	Minimum Charge	Job		300		300	
50% Vented							
	Demolish	S.F.		2.88		2.88	Includes material and labor to install commercial grade steel windows, including glazing.
	Install	S.F.	122	6.05		128.05	
	Demolish and Install	S.F.	122	8.93		130.93	
	Reinstall	S.F.		4.83		4.83	
	Clean	Ea.	.14	1.71		1.85	
	Paint	S.F.	.40	.98		1.38	
	Minimum Charge	Job		300		300	



Brick Veneer

Concrete Masonry Units

Masonry Wall	Unit	Material	Labor	Equip.	Total	Specification
Unreinforced CMU						
4" x 8" x 16"						
Demolish	S.F.		.16	.42	.58	Includes material and labor to install normal weight 4" x 8" x 16" block.
Install	S.F.	2.98	5.40		8.38	
Demolish and Install	S.F.	2.98	5.56	.42	8.96	
Clean	S.F.	.14	.62		.76	
Paint	S.F.	.30	1		1.30	
Minimum Charge	Job		266		266	
6" x 8" x 16"						
Demolish	S.F.		.22	.56	.78	Includes material and labor to install normal weight 6" x 8" x 16" block.
Install	S.F.	3.83	5.65		9.48	
Demolish and Install	S.F.	3.83	5.87	.56	10.26	
Clean	S.F.	.14	.62		.76	
Paint	S.F.	.30	1		1.30	
Minimum Charge	Job		266		266	
8" x 8" x 16"						
Demolish	S.F.		.43	1.12	1.55	Includes material and labor to install normal weight 8" x 8" x 16" block.
Install	S.F.	3.85	6.25		10.10	
Demolish and Install	S.F.	3.85	6.68	1.12	11.65	
Clean	S.F.	.14	.62		.76	
Paint	S.F.	.30	1		1.30	
Minimum Charge	Job		266		266	
12" x 8" x 16"						
Demolish	S.F.		.43	1.12	1.55	Includes material and labor to install normal weight 12" x 8" x 16" block.
Install	S.F.	6.10	9.50		15.60	
Demolish and Install	S.F.	6.10	9.93	1.12	17.15	
Clean	S.F.	.14	.62		.76	
Paint	S.F.	.30	1		1.30	
Minimum Charge	Job		266		266	
Reinforced CMU						
4" x 8" x 16"						
Demolish	S.F.		2.50	1.65	4.15	Includes material and labor to install normal weight 4" x 8" x 16" block, mortar and 1/2" re-bar installed vertically every 24" O.C.
Install	S.F.	3.42	5.55		8.97	
Demolish and Install	S.F.	3.42	8.05	1.65	13.12	
Clean	S.F.	.14	.62		.76	
Paint	S.F.	.30	1		1.30	
Minimum Charge	Job		490		490	
6" x 8" x 16"						
Demolish	S.F.		2.63	1.06	3.69	Includes material and labor to install normal weight 6" x 8" x 16" block, mortar and 1/2" re-bar installed vertically every 24" O.C.
Install	S.F.	4.16	5.80		9.96	
Demolish and Install	S.F.	4.16	8.43	1.06	13.65	
Clean	S.F.	.14	.62		.76	
Paint	S.F.	.30	1		1.30	
Minimum Charge	Job		490		490	

Masonry

Masonry Wall		Unit	Material	Labor	Equip.	Total	Specification
8" x 8" x 16"							
	Demolish	S.F.		2.78	1.12	3.90	Includes material and labor to install normal weight 8" x 8" x 16" block, mortar and 1/2" re-bar installed vertically every 24" O.C.
	Install	S.F.	4.16	6.30		10.46	
	Demolish and Install	S.F.	4.16	9.08	1.12	14.36	
	Clean	S.F.	.14	.62		.76	
	Paint	S.F.	.30	1		1.30	
	Minimum Charge	Job		490		490	
12" x 8" x 16"							
	Demolish	S.F.		2.86	1.16	4.02	Includes material and labor to install normal weight 12" x 8" x 16" block, mortar and 1/2" re-bar installed vertically every 24" O.C.
	Install	S.F.	6.65	9.80		16.45	
	Demolish and Install	S.F.	6.65	12.66	1.16	20.47	
	Clean	S.F.	.14	.62		.76	
	Paint	S.F.	.30	1		1.30	
	Minimum Charge	Job		490		490	
Structural Brick							
4" Single Row							
	Demolish	S.F.		3.60		3.60	Cost includes material and labor to install 4" red brick wall, running bond with 3/8" concave joints, mortar and ties.
	Install	S.F.	7.85	11.60		19.45	
	Demolish and Install	S.F.	7.85	15.20		23.05	
	Clean	S.F.	.14	.53		.67	
	Paint	S.F.	.30	1		1.30	
	Minimum Charge	Job		490		490	
8" Double Row							
	Demolish	S.F.		3.60		3.60	Cost includes material and labor to install 8" red brick wall, running bond, with 3/8" concave joints, mortar and wall ties.
	Install	S.F.	53.50	18.45		71.95	
	Demolish and Install	S.F.	53.50	22.05		75.55	
	Clean	S.F.	.14	.53		.67	
	Paint	S.F.	.30	1		1.30	
	Minimum Charge	Job		490		490	
12" Triple Row							
	Demolish	S.F.		5		5	Cost includes material and labor to install 12" red brick wall, running bond, with 3/8" concave joints, mortar and wall ties.
	Install	S.F.	80	26		106	
	Demolish and Install	S.F.	80	31		111	
	Clean	S.F.	.14	.53		.67	
	Paint	S.F.	.30	1		1.30	
	Minimum Charge	Job		490		490	
Brick Veneer							
4" Red Common							
	Demolish	S.F.		3.60		3.60	Cost includes material and labor to install 4" common red face brick, running bond with 3/8" concave joints, mortar and wall ties.
	Install	S.F.	26	10.85		36.85	
	Demolish and Install	S.F.	26	14.45		40.45	
	Clean	S.F.	.14	.53		.67	
	Paint	S.F.	.30	1		1.30	
	Minimum Charge	Job		266		266	
4" Used							
	Demolish	S.F.		3.60		3.60	Cost includes material and labor to install 4" red brick wall, running bond with 3/8" concave joints, mortar and ties.
	Install	S.F.	7.85	11.60		19.45	
	Demolish and Install	S.F.	7.85	15.20		23.05	
	Clean	S.F.	.14	.53		.67	
	Paint	S.F.	.30	1		1.30	
	Minimum Charge	Job		266		266	

Masonry

Masonry Wall		Unit	Material	Labor	Equip.	Total	Specification
6" Jumbo	Demolish	S.F.		3.60		3.60	Cost includes material and labor to install 6" red jumbo brick veneer, running bond with 3/8" concave joints, mortar and ties.
	Install	S.F.	6.55	5.75		12.30	
	Demolish and Install	S.F.	6.55	9.35		15.90	
	Clean	S.F.	.14	.53		.67	
	Paint	S.F.	.30	1		1.30	
	Minimum Charge	Job		266		266	
Norman (11-1/2")	Demolish	S.F.		3.60		3.60	Cost includes material and labor to install 4" norman red brick wall, running bond with 3/8" concave joints, mortar and ties.
	Install	S.F.	7.55	7.80		15.35	
	Demolish and Install	S.F.	7.55	11.40		18.95	
	Clean	S.F.	.14	.53		.67	
	Paint	S.F.	.30	1		1.30	
	Minimum Charge	Job		266		266	
Glazed	Demolish	S.F.		3.60		3.60	Includes material, labor and equipment to install glazed brick.
	Install	S.F.	26	11.85		37.85	
	Demolish and Install	S.F.	26	15.45		41.45	
	Clean	S.F.	.14	.53		.67	
	Paint	S.F.	.30	1		1.30	
	Minimum Charge	Job		266		266	
Slumpstone 6" x 4"	Demolish	S.F.		.16	.42	.58	Cost includes material and labor to install 6" x 4" x 16" concrete slump block.
	Install	S.F.	8.55	6.15		14.70	
	Demolish and Install	S.F.	8.55	6.31	.42	15.28	
	Clean	S.F.	.14	.62		.76	
	Paint	S.F.	.30	1		1.30	
	Minimum Charge	Job		266		266	
6" x 6"	Demolish	S.F.		.22	.56	.78	Cost includes material and labor to install 6" x 6" x 16" concrete slump block.
	Install	S.F.	6.60	6.30		12.90	
	Demolish and Install	S.F.	6.60	6.52	.56	13.68	
	Clean	S.F.	.14	.62		.76	
	Paint	S.F.	.30	1		1.30	
	Minimum Charge	Job		266		266	
8" x 6"	Demolish	S.F.		.22	.56	.78	Cost includes material and labor to install 8" x 6" x 16" concrete slump block.
	Install	S.F.	9.80	6.55		16.35	
	Demolish and Install	S.F.	9.80	6.77	.56	17.13	
	Clean	S.F.	.14	.62		.76	
	Paint	S.F.	.30	1		1.30	
	Minimum Charge	Job		266		266	
12" x 4"	Demolish	S.F.		.16	.42	.58	Cost includes material and labor to install 12" x 4" x 16" concrete slump block.
	Install	S.F.	17.20	7.55		24.75	
	Demolish and Install	S.F.	17.20	7.71	.42	25.33	
	Clean	S.F.	.14	.62		.76	
	Paint	S.F.	.30	1		1.30	
	Minimum Charge	Job		266		266	
12" x 6"	Demolish	S.F.		.22	.56	.78	Cost includes material and labor to install 12" x 6" x 16" concrete slump block.
	Install	S.F.	18.60	8.15		26.75	
	Demolish and Install	S.F.	18.60	8.37	.56	27.53	
	Clean	S.F.	.14	.62		.76	
	Paint	S.F.	.30	1		1.30	
	Minimum Charge	Job		266		266	

Masonry

Masonry Wall		Unit	Material	Labor	Equip.	Total	Specification
Stucco							
Three Coat							
	Demolish	S.Y.		3.10		3.10	Includes material and labor to install stucco on exterior masonry walls.
	Install	S.Y.	6.45	12.30	.68	19.43	
	Demolish and Install	S.Y.	6.45	15.40	.68	22.53	
	Clean	S.Y.		5.60		5.60	
	Paint	S.F.	.30	.75		1.05	
	Minimum Charge	Job		258		258	
Three Coat w / Wire Mesh							
	Demolish	S.Y.		5.60		5.60	Includes material and labor to install stucco on wire mesh over wood framing.
	Install	S.Y.	14.05	47.50	2.15	63.70	
	Demolish and Install	S.Y.	14.05	53.10	2.15	69.30	
	Clean	S.Y.		5.60		5.60	
	Paint	S.F.	.30	.75		1.05	
	Minimum Charge	Job		258		258	
Fill Cracks							
	Install	S.F.	.25	4.13		4.38	Includes labor and material to fill in hairline cracks up to 1/8" with filler, including sand and fill per S.F.
	Minimum Charge	Job		258		258	
Furring							
1" x 2"							
	Demolish	L.F.		.18		.18	Cost includes material and labor to install 1" x 2" furring on masonry wall.
	Install	L.F.	.30	1.09		1.39	
	Demolish and Install	L.F.	.30	1.27		1.57	
	Minimum Charge	Job		269		269	
2" x 2"							
	Demolish	L.F.		.20		.20	Cost includes material and labor to install 2" x 2" furring on masonry wall.
	Install	L.F.	2.04	1.19		3.23	
	Demolish and Install	L.F.	2.04	1.39		3.43	
	Minimum Charge	Job		269		269	
2" x 4"							
	Demolish	L.F.		.21		.21	Cost includes material and labor to install 2" x 4" furring on masonry wall.
	Install	L.F.	.70	1.36		2.06	
	Demolish and Install	L.F.	.70	1.57		2.27	
	Reinstall	L.F.		1.09		1.09	
	Minimum Charge	Job		269		269	
Maintenance / Cleaning							
Repoint							
	Install	S.F.	1.74	6.65		8.39	Includes labor and material to cut and repoint brick, hard mortar, running bond.
	Minimum Charge	Hr.		66.50		66.50	
Acid Etch							
	Install	S.F.	.09	.95		1.04	Includes labor and material to acid wash smooth brick.
	Minimum Charge	Job		202	82	284	
Pressure Wash							
	Clean	S.F.		1.08	.34	1.42	Includes labor and material to high pressure water wash masonry, average.
	Minimum Charge	Job		202	82	284	
Waterproof							
	Install	S.F.	.81	1		1.81	Includes labor and material to install masonry waterproofing.
	Minimum Charge	Job		250		250	

Masonry

Chimney		Unit	Material	Labor	Equip.	Total	Specification
Demo & Haul Exterior	Demolish	C.F.		7.35		7.35	Includes minimum labor and equipment to remove masonry and haul debris to truck or dumpster.
	Minimum Charge	Job		225		225	
Demo & Haul Interior	Demolish	C.F.		10.10		10.10	Includes minimum labor and equipment to remove masonry and haul debris to truck or dumpster.
	Minimum Charge	Job		225		225	
Install New (w / flue) Brick	Install	V.L.F.	130	61.50		191.50	Includes material and labor to install brick chimney with flue. Foundation not included.
	Minimum Charge	Job		266		266	
Natural Stone	Install	V.L.F.	88	98		186	Includes labor and material to install natural stone chimney.
	Minimum Charge	Job		266		266	
Install From Roof Up Brick	Install	V.L.F.	130	61.50		191.50	Includes material and labor to install brick chimney with flue. Foundation not included.
	Minimum Charge	Job		266		266	
Natural Stone	Install	V.L.F.	88	81.50		169.50	Includes labor and material to install natural stone chimney.
	Minimum Charge	Job		266		266	
Install Base Pad	Install	Ea.	525	296	1.49	822.49	Includes labor and material to replace spread footing, 5' square x 16" deep.
	Minimum Charge	Job		1300	36.50	1336.50	
Metal Cap	Install	Ea.	94.50	33.50		128	Includes labor and materials to install bird and squirrel screens in a chimney flue.
	Minimum Charge	Job		269		269	

Fireplace		Unit	Material	Labor	Equip.	Total	Specification
Common Brick 30"	Demolish	Ea.		1600		1600	Includes material and labor to install a complete unit which includes common brick, foundation, damper, flue lining stack to 15' high and a 30" fire box.
	Install	Ea.	5100	4900		10000	
	Demolish and Install	Ea.	5100	6500		11600	
	Minimum Charge	Job		266		266	
36"	Demolish	Ea.		1600		1600	Includes material and labor to install a complete unit which includes common brick, foundation, damper, flue lining stack to 15' high and a 36" fire box.
	Install	Ea.	5400	5450		10850	
	Demolish and Install	Ea.	5400	7050		12450	
	Minimum Charge	Job		266		266	
42"	Demolish	Ea.		1600		1600	Includes material and labor to install a complete unit which includes common brick, foundation, damper, flue lining stack to 15' high and a 42" fire box.
	Install	Ea.	5850	6125		11975	
	Demolish and Install	Ea.	5850	7725		13575	
	Minimum Charge	Job		266		266	




Masonry

Fireplace		Unit	Material	Labor	Equip.	Total	Specification
48"							
	Demolish	Ea.		1600		1600	Includes material and labor to install a complete unit which includes common brick, foundation, damper, flue lining stack to 15' high and a 48" fire box.
	Install	Ea.	6200	6975		13175	
	Demolish and Install	Ea.	6200	8575		14775	
	Minimum Charge	Job		266		266	
Raised Hearth							
Brick Hearth							
	Demolish	S.F.		7.05		7.05	Includes material and labor to install a brick fireplace hearth based on 30" x 29" opening.
	Install	S.F.	2.84	41		43.84	
	Demolish and Install	S.F.	2.84	48.05		50.89	
	Clean	S.F.	.14	.53		.67	
	Minimum Charge	Job		266		266	
Marble Hearth / Facing							
	Demolish	Ea.		45		45	Includes material and labor to install marble fireplace hearth.
	Install	Ea.	330	164		494	
	Demolish and Install	Ea.	330	209		539	
	Reinstall	Ea.		131.33		131.33	
	Clean	Ea.	44	8.10		52.10	
	Minimum Charge	Job		266		266	
Breast (face) Brick							
	Demolish	S.F.		7.05		7.05	Includes material and labor to install standard red brick, running bond.
	Install	S.F.	8	11.35		19.35	
	Demolish and Install	S.F.	8	18.40		26.40	
	Clean	S.F.		1.08	.34	1.42	
	Minimum Charge	Hr.		66.50		66.50	
Fire Box							
	Demolish	Ea.		360		360	Includes material and labor to install fireplace box only (110 brick).
	Install	Ea.	1050	490		1540	
	Demolish and Install	Ea.	1050	850		1900	
	Clean	Ea.	.12	20.50		20.62	
	Minimum Charge	Hr.		66.50		66.50	
Natural Stone							
	Demolish	S.F.		7.05		7.05	Includes material and labor to install high priced stone, split or rock face.
	Install	S.F.	18.85	21		39.85	
	Demolish and Install	S.F.	18.85	28.05		46.90	
	Clean	S.F.	.17	1.23		1.40	
	Minimum Charge	Job		490		490	
Slumpstone Veneer							
	Demolish	S.F.		.22	.56	.78	Cost includes material and labor to install 8" x 6" x 16" concrete slump block.
	Install	S.F.	9.80	6.55		16.35	
	Demolish and Install	S.F.	9.80	6.77	.56	17.13	
	Clean	S.F.	.14	.62		.76	
	Paint	S.F.	.30	1		1.30	
	Minimum Charge	Job		266		266	
Prefabricated Firebox							
	Demolish	Ea.		64.50		64.50	Includes material and labor to install up to 43" radiant heat, zero clearance, prefabricated fireplace. Flues, doors or blowers not included.
	Install	Ea.	1950	490		2440	
	Demolish and Install	Ea.	1950	554.50		2504.50	
	Reinstall	Ea.		390.98		390.98	
	Clean	Ea.	1.64	25.50		27.14	
	Minimum Charge	Job		269		269	

Masonry

Fireplace		Unit	Material	Labor	Equip.	Total	Specification
Flue							
	Demolish	V.L.F.		7.50		7.50	Includes material and labor to install prefabricated chimney vent, 8" exposed metal flue.
	Install	V.L.F.	53	20.50		73.50	
	Demolish and Install	V.L.F.	53	28		81	
	Reinstall	V.L.F.		16.33		16.33	
	Clean	L.F.	.65	5.05		5.70	
	Minimum Charge	Job		385		385	
Blower							
	Demolish	Ea.		6		6	Includes material and labor to install blower for metal fireplace flue.
	Install	Ea.	220	37		257	
	Demolish and Install	Ea.	220	43		263	
	Reinstall	Ea.		29.48		29.48	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		385		385	
Accessories							
Wood Mantle							
	Demolish	L.F.		7.50		7.50	Includes material and labor to install wood fireplace mantel.
	Install	L.F.	19.65	15.35		35	
	Demolish and Install	L.F.	19.65	22.85		42.50	
	Reinstall	L.F.		15.36		15.36	
	Clean	S.F.		.51		.51	
	Paint	L.F.	.21	12		12.21	
	Minimum Charge	Job		269		269	
Colonial Style							
	Demolish	Ea.		66.50		66.50	Includes material and labor to install wood fireplace mantel.
	Install	Opng.	3375	269		3644	
	Demolish and Install	Opng.	3375	335.50		3710.50	
	Reinstall	Opng.		268.80		268.80	
	Clean	Ea.		.91		.91	
	Paint	Ea.	45	165		210	
	Minimum Charge	Job		269		269	
Modern Design							
	Demolish	Ea.		66.50		66.50	Includes material and labor to install wood fireplace mantel.
	Install	Opng.	1000	108		1108	
	Demolish and Install	Opng.	1000	174.50		1174.50	
	Reinstall	Opng.		107.52		107.52	
	Clean	Ea.		.91		.91	
	Paint	Ea.	45	165		210	
	Minimum Charge	Job		269		269	
Glass Door Unit							
	Demolish	Ea.		9.35		9.35	Includes material and labor to install a fireplace glass door unit.
	Install	Ea.	1200	133		1333	
	Demolish and Install	Ea.	1200	142.35		1342.35	
	Reinstall	Ea.		133.10		133.10	
	Clean	Ea.	.40	15.55		15.95	
	Minimum Charge	Job		269		269	
Fire Screen							
	Demolish	Ea.		4.69		4.69	Includes material and labor to install a fireplace fire screen.
	Install	Ea.	375	5.55		380.55	
	Demolish and Install	Ea.	375	10.24		385.24	
	Reinstall	Ea.		5.55		5.55	
	Clean	Ea.	.20	13.50		13.70	
	Minimum Charge	Job		269		269	

Siding

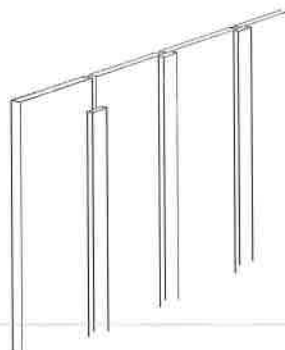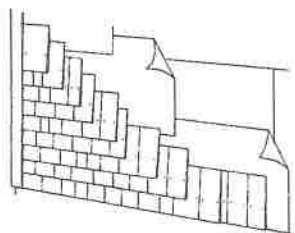

Shingles

Board & Batten

Texture 1-11

Exterior Siding		Unit	Material	Labor	Equip.	Total	Specification
Trim							
1" x 2"							
	Demolish	L.F.		.37		.37	Cost includes material and labor to install 1" x 2" pine trim.
	Install	L.F.	.30	1.63		1.93	
	Demolish and Install	L.F.	.30	2		2.30	
	Clean	L.F.	.01	.27		.28	
	Paint	L.F.	.06	.69		.75	
	Minimum Charge	Job		269		269	
1" x 3"							
	Demolish	L.F.		.37		.37	Cost includes material and labor to install 1" x 3" pine trim.
	Install	L.F.	.42	1.85		2.27	
	Demolish and Install	L.F.	.42	2.22		2.64	
	Clean	L.F.	.01	.27		.28	
	Paint	L.F.	.06	.69		.75	
	Minimum Charge	Job		269		269	
1" x 4"							
	Demolish	L.F.		.37		.37	Cost includes material and labor to install 1" x 4" pine trim.
	Install	L.F.	.87	2.15		3.02	
	Demolish and Install	L.F.	.87	2.52		3.39	
	Clean	L.F.	.01	.27		.28	
	Paint	L.F.	.06	.69		.75	
	Minimum Charge	Job		269		269	
1" x 6"							
	Demolish	L.F.		.37		.37	Cost includes material and labor to install 1" x 6" pine trim.
	Install	L.F.	1.39	2.15		3.54	
	Demolish and Install	L.F.	1.39	2.52		3.91	
	Clean	L.F.	.01	.27		.28	
	Paint	L.F.	.19	.69		.88	
	Minimum Charge	Job		269		269	
1" x 8"							
	Demolish	L.F.		.41		.41	Cost includes material and labor to install 1" x 8" pine trim.
	Install	L.F.	.95	2.69		3.64	
	Demolish and Install	L.F.	.95	3.10		4.05	
	Clean	L.F.	.02	.29		.31	
	Paint	L.F.	.19	.69		.88	
	Minimum Charge	Job		269		269	
Aluminum							
8" Non-Insulated							
	Demolish	S.F.		1.01		1.01	Includes material and labor to install horizontal, colored clapboard, 8" to 10" wide, plain.
	Install	S.F.	3.53	2.18		5.71	
	Demolish and Install	S.F.	3.53	3.19		6.72	
	Reinstall	S.F.		2.18		2.18	
	Clean	S.F.		.40		.40	
	Minimum Charge	Job		269		269	

Siding

Exterior Siding		Unit	Material	Labor	Equip.	Total	Specification
8" Insulated							
	Demolish	S.F.		1.01		1.01	Includes material and labor to install horizontal, colored insulated clapboard, 8" wide, plain.
	Install	S.F.	3.87	2.18		6.05	
	Demolish and Install	S.F.	3.87	3.19		7.06	
	Reinstall	S.F.		2.18		2.18	
	Clean	S.F.		.40		.40	
	Minimum Charge	Job		269		269	
12" Non-Insulated							
	Demolish	S.F.		1.01		1.01	Includes material and labor to install horizontal, colored clapboard, plain.
	Install	S.F.	4.22	1.88		6.10	
	Demolish and Install	S.F.	4.22	2.89		7.11	
	Reinstall	S.F.		1.88		1.88	
	Clean	S.F.		.40		.40	
	Minimum Charge	Job		269		269	
12" Insulated							
	Demolish	S.F.		1.01		1.01	Includes material and labor to install horizontal, colored insulated clapboard, plain.
	Install	S.F.	3.83	1.88		5.71	
	Demolish and Install	S.F.	3.83	2.89		6.72	
	Reinstall	S.F.		1.88		1.88	
	Clean	S.F.		.40		.40	
	Minimum Charge	Job		269		269	
Clapboard 8" to 10"							
	Demolish	S.F.		1.01		1.01	Includes material and labor to install horizontal, colored clapboard, 8" to 10" wide, plain.
	Install	S.F.	3.53	2.18		5.71	
	Demolish and Install	S.F.	3.53	3.19		6.72	
	Reinstall	S.F.		2.18		2.18	
	Clean	S.F.		.40		.40	
	Minimum Charge	Job		269		269	
Corner Strips							
	Demolish	L.F.		.53		.53	Includes material and labor to install corners for horizontal lapped aluminum siding.
	Install	V.L.F.	1.35	2.18		3.53	
	Demolish and Install	V.L.F.	1.35	2.71		4.06	
	Reinstall	V.L.F.		2.18		2.18	
	Clean	L.F.		.27		.27	
	Minimum Charge	Job		269		269	
Vinyl							
Non-Insulated							
	Demolish	S.F.		.79		.79	Cost includes material and labor to install 10" non-insulated solid vinyl siding.
	Install	S.F.	3.84	1.95		5.79	
	Demolish and Install	S.F.	3.84	2.74		6.58	
	Reinstall	S.F.		1.56		1.56	
	Clean	S.F.		.40		.40	
	Minimum Charge	Job		269		269	
Insulated							
	Demolish	S.F.		.79		.79	Cost includes material and labor to install insulated solid vinyl siding panels.
	Install	S.F.	5.30	2.69		7.99	
	Demolish and Install	S.F.	5.30	3.48		8.78	
	Reinstall	S.F.		2.15		2.15	
	Clean	S.F.		.40		.40	
	Minimum Charge	Job		269		269	
Corner Strips							
	Demolish	L.F.		.50		.50	Cost includes material and labor to install corner posts for vinyl siding panels.
	Install	L.F.	3.21	1.54		4.75	
	Demolish and Install	L.F.	3.21	2.04		5.25	
	Reinstall	L.F.		1.23		1.23	
	Clean	L.F.		.27		.27	
	Minimum Charge	Job		269		269	

Siding

Exterior Siding		Unit	Material	Labor	Equip.	Total	Specification
Fiber Cement Siding							
4' x 8' Panel							
	Demolish	S.F.		.81		.81	Cost includes material and labor to install 4' x 8' fiber cement 7/16" thick.
	Install	S.F.	.04	1.18		1.22	
	Demolish and Install	S.F.	.04	1.99		2.03	
	Clean	S.F.		.40		.40	
	Paint	S.F.	.61	1.56		2.17	
	Minimum Charge	Job		269		269	
Lap							
	Demolish	S.F.		.80		.80	Cost includes material and labor to install 8" or 12" fiber cement lap siding 7/16" thick with wood grain finish.
	Install	S.F.	2.17	2.13		4.30	
	Demolish and Install	S.F.	2.17	2.93		5.10	
	Clean	S.F.		.40		.40	
	Paint	S.F.	.61	1.56		2.17	
	Minimum Charge	Job		269		269	
Plywood Panel							
Douglas Fir (T-1-11)							
	Demolish	S.F.		.62		.62	Includes material and labor to install Douglas fir 4' x 8' plywood exterior siding plain or patterns.
	Install	S.F.	1.58	1.67		3.25	
	Demolish and Install	S.F.	1.58	2.29		3.87	
	Reinstall	S.F.		1.67		1.67	
	Clean	S.F.		.40		.40	
	Paint	S.F.	.61	1.56		2.17	
	Minimum Charge	Job		269		269	
Redwood							
	Demolish	S.F.		.62		.62	Includes material and labor to install redwood 4' x 8' plywood exterior siding plain or patterns.
	Install	S.F.	3.56	1.67		5.23	
	Demolish and Install	S.F.	3.56	2.29		5.85	
	Reinstall	S.F.		1.67		1.67	
	Clean	S.F.		.40		.40	
	Paint	S.F.	.61	1.56		2.17	
	Minimum Charge	Job		269		269	
Cedar							
	Demolish	S.F.		.62		.62	Cost includes material and labor to install 4' x 8' cedar plywood exterior siding plain or patterns.
	Install	S.F.	13.70	1.67		15.37	
	Demolish and Install	S.F.	13.70	2.29		15.99	
	Reinstall	S.F.		1.67		1.67	
	Clean	S.F.		.40		.40	
	Paint	S.F.	.61	1.56		2.17	
	Minimum Charge	Job		269		269	
Tongue and Groove							
Fir, Tongue and Groove							
	Demolish	S.F.		1.12		1.12	Includes material and labor to install fir tongue and groove exterior siding 1" x 8".
	Install	S.F.	8.45	1.63		10.08	
	Demolish and Install	S.F.	8.45	2.75		11.20	
	Reinstall	S.F.		1.30		1.30	
	Clean	S.F.		.40		.40	
	Paint	S.F.	.61	1.56		2.17	
	Minimum Charge	Job		269		269	
Pine, Tongue and Groove							
	Demolish	S.F.		1.12		1.12	Includes labor and material to install Pine tongue and groove exterior siding 1" x 8".
	Install	S.F.	1.89	1.63		3.52	
	Demolish and Install	S.F.	1.89	2.75		4.64	
	Reinstall	S.F.		1.63		1.63	
	Clean	S.F.		.40		.40	
	Paint	S.F.	.61	1.56		2.17	
	Minimum Charge	Job		269		269	

Siding

Exterior Siding		Unit	Material	Labor	Equip.	Total	Specification
Cedar, Tongue and Groove							
	Demolish	S.F.		1.12		1.12	Includes labor and material to install cedar tongue and groove exterior siding 1" x 8".
	Install	S.F.	2.37	2.44		4.81	
	Demolish and Install	S.F.	2.37	3.56		5.93	
	Reinstall	S.F.		1.95		1.95	
	Clean	S.F.		.40		.40	
	Paint	S.F.	.61	1.56		2.17	
	Minimum Charge	Job		269		269	
Redwood, Tongue and Groove							
	Demolish	S.F.		1.12		1.12	Includes labor and material to install redwood tongue and groove exterior siding 1" x 4".
	Install	S.F.	9.80	2.44		12.24	
	Demolish and Install	S.F.	9.80	3.56		13.36	
	Reinstall	S.F.		2.44		2.44	
	Clean	S.F.		.40		.40	
	Paint	S.F.	.61	1.56		2.17	
	Minimum Charge	Job		269		269	
Board and Batten							
Fir							
	Demolish	S.F.		1.12		1.12	Cost includes material and labor to install 1" x 8" fir boards with 1" x 3" battens.
	Install	S.F.	.28	1.63		1.91	
	Demolish and Install	S.F.	.28	2.75		3.03	
	Reinstall	S.F.		1.30		1.30	
	Clean	S.F.		.40		.40	
	Paint	S.F.	.61	1.56		2.17	
	Minimum Charge	Job		269		269	
Pine							
	Demolish	S.F.		1.12		1.12	Cost includes material and labor to install 1" x 10" pine boards with 1" x 3" battens.
	Install	S.F.	4.86	1.43		6.29	
	Demolish and Install	S.F.	4.86	2.55		7.41	
	Reinstall	S.F.		1.15		1.15	
	Clean	S.F.		.40		.40	
	Paint	S.F.	.61	1.56		2.17	
	Minimum Charge	Job		269		269	
Cedar							
	Demolish	S.F.		1.12		1.12	Cost includes material and labor to install 1" x 10" cedar boards with 1" x 3" battens.
	Install	S.F.	14.05	1.43		15.48	
	Demolish and Install	S.F.	14.05	2.55		16.60	
	Reinstall	S.F.		1.15		1.15	
	Clean	S.F.		.40		.40	
	Paint	S.F.	.61	1.56		2.17	
	Minimum Charge	Job		269		269	
Redwood							
	Demolish	S.F.		1.12		1.12	Cost includes material and labor to install 1" x 10" redwood boards with 1" x 3" battens.
	Install	S.F.	13.65	1.43		15.08	
	Demolish and Install	S.F.	13.65	2.55		16.20	
	Reinstall	S.F.		1.15		1.15	
	Clean	S.F.		.40		.40	
	Paint	S.F.	.61	1.56		2.17	
	Minimum Charge	Job		269		269	
Wood Shingle							
	Demolish	Sq.		104		104	Includes material and labor to install wood shingles/shakes.
	Install	Sq.	1050	239		1289	
	Demolish and Install	Sq.	1050	343		1393	
	Clean	Sq.		42.50		42.50	
	Paint	Sq.	37	139		176	
	Minimum Charge	Job		269		269	

Siding

Exterior Siding		Unit	Material	Labor	Equip.	Total	Specification
Synthetic Stucco System							
	Demolish	S.F.		3.75		3.75	Cost includes material and labor to install 2 coats of adhesive mixture, glass fiber mesh, 1" insulation board, and textured finish coat.
	Install	S.F.	3.56	9.15	.50	13.21	
	Demolish and Install	S.F.	3.56	12.90	.50	16.96	
	Clean	S.F.		.37		.37	
	Paint	S.F.	.30	.75		1.05	
	Minimum Charge	Job		1225	67.50	1292.50	

Site Work



Front-end Loader

Bulldozer

Grading		Unit	Material	Labor	Equip.	Total	Specification
Hand (fine)	Install	S.F.		.81		.81	Includes labor and material to install fine grade for slab on grade, hand grade.
	Minimum Charge	Job		202		202	
Machine (fine)	Install	S.Y.		.72	.95	1.67	Includes labor and material to install fine grade for roadway, base or leveling course.
	Minimum Charge	Job		485	645	1130	

Asphalt Paving		Unit	Material	Labor	Equip.	Total	Specification
Seal Coat	Install	S.F.	1.68	.15		1.83	Includes labor and material to install sealcoat for a small area.
	Minimum Charge	Job		202		202	
Wearing Course	Install	S.F.	95	.52	.39	95.91	Cost includes labor and material to install 1" thick wearing course.
	Minimum Charge	Job		202		202	

Masonry Pavers		Unit	Material	Labor	Equip.	Total	Specification
Natural Concrete Sand Base							Includes material and labor to install concrete pavers on sand base.
	Demolish	S.F.		4.50		4.50	
	Install	S.F.	6.10	8.85		14.95	
	Demolish and Install	S.F.	6.10	13.35		19.45	
	Reinstall	S.F.		7.10		7.10	
	Clean	S.F.		1.62		1.62	
	Minimum Charge	Job		266		266	
Mortar Base							Includes material and labor to install concrete pavers on mortar base.
	Demolish	S.F.		7.50	1.83	9.33	
	Install	S.F.	5.05	7.40		12.45	
	Demolish and Install	S.F.	5.05	14.90	1.83	21.78	
	Reinstall	S.F.		5.92		5.92	
	Clean	S.F.		1.47		1.47	
	Minimum Charge	Job		266		266	

Site Work

Masonry Pavers		Unit	Material	Labor	Equip.	Total	Specification
Adobe							
Sand Base							
	Demolish	S.F.		4.50		4.50	Includes material and labor to install adobe pavers on sand base.
	Install	S.F.	3.39	5.90		9.29	
	Demolish and Install	S.F.	3.39	10.40		13.79	
	Reinstall	S.F.		4.73		4.73	
	Clean	S.F.		1.62		1.62	
	Minimum Charge	Job		266		266	
Mortar Base							
	Demolish	S.F.		7.50	1.83	9.33	Includes material and labor to install adobe pavers on mortar base.
	Install	S.F.	3.81	7.40		11.21	
	Demolish and Install	S.F.	3.81	14.90	1.83	20.54	
	Reinstall	S.F.		5.92		5.92	
	Clean	S.F.		1.47		1.47	
	Minimum Charge	Job		266		266	
Standard Brick							
Sand Base							
	Demolish	S.F.		4.50		4.50	Includes material and labor to install standard brick pavers on sand base.
	Install	S.F.	5.50	9.80		15.30	
	Demolish and Install	S.F.	5.50	14.30		19.80	
	Reinstall	S.F.		7.84		7.84	
	Clean	S.F.		1.62		1.62	
	Minimum Charge	Job		266		266	
Mortar Base							
	Demolish	S.F.		7.50	1.83	9.33	Includes material and labor to install standard brick pavers on mortar base.
	Install	S.F.	5.70	3.55		9.25	
	Demolish and Install	S.F.	5.70	11.05	1.83	18.58	
	Reinstall	S.F.		2.84		2.84	
	Clean	S.F.		1.47		1.47	
	Minimum Charge	Job		266		266	
Deluxe Brick							
Sand Base							
	Demolish	S.F.		4.50		4.50	Includes material and labor to install deluxe brick pavers on sand base.
	Install	S.F.	6.65	7.40		14.05	
	Demolish and Install	S.F.	6.65	11.90		18.55	
	Reinstall	S.F.		5.92		5.92	
	Clean	S.F.		1.62		1.62	
	Minimum Charge	Job		266		266	
Mortar Base							
	Demolish	S.F.		7.50	1.83	9.33	Includes material and labor to install deluxe brick pavers on mortar base.
	Install	S.F.	6.45	13.30		19.75	
	Demolish and Install	S.F.	6.45	20.80	1.83	29.08	
	Reinstall	S.F.		10.65		10.65	
	Clean	S.F.		1.47		1.47	
	Minimum Charge	Job		266		266	

Fencing		Unit	Material	Labor	Equip.	Total	Specification
Block w / Footing							
4"							
	Demolish	S.F.		.16	.42	.58	Cost includes material and labor to install 4" non-reinforced concrete block.
	Install	S.F.	2.79	5.80		8.59	
	Demolish and Install	S.F.	2.79	5.96	.42	9.17	
	Clean	S.F.	.26	1.35	.43	2.04	
	Paint	S.F.	.55	.84		1.39	
	Minimum Charge	Job		266		266	

Site Work

Fencing		Unit	Material	Labor	Equip.	Total	Specification
4" Reinforced							
	Demolish	S.F.		2.50	1.65	4.15	Cost includes material and labor to install 4" reinforced concrete block.
	Install	S.F.	3.23	5.85		9.08	
	Demolish and Install	S.F.	3.23	8.35	1.65	13.23	
	Clean	S.F.	.26	1.35	.43	2.04	
	Paint	S.F.	.55	.84		1.39	
	Minimum Charge	Job		266		266	
6"							
	Demolish	S.F.		.22	.56	.78	Cost includes material and labor to install 6" non-reinforced concrete block.
	Install	S.F.	3.64	6.25		9.89	
	Demolish and Install	S.F.	3.64	6.47	.56	10.67	
	Clean	S.F.	.26	1.35	.43	2.04	
	Paint	S.F.	.55	.84		1.39	
	Minimum Charge	Job		266		266	
6" Reinforced							
	Demolish	S.F.		2.63	1.06	3.69	Cost includes material and labor to install 6" reinforced concrete block.
	Install	S.F.	3.97	6.30		10.27	
	Demolish and Install	S.F.	3.97	8.93	1.06	13.96	
	Clean	S.F.	.26	1.35	.43	2.04	
	Paint	S.F.	.55	.84		1.39	
	Minimum Charge	Job		266		266	
Cap for Block Wall							
	Demolish	L.F.		2.81		2.81	Includes labor and equipment to install precast concrete coping.
	Install	L.F.	8.40	13.05		21.45	
	Demolish and Install	L.F.	8.40	15.86		24.26	
	Clean	L.F.	.03	4.22		4.25	
	Paint	S.F.	.55	.84		1.39	
	Minimum Charge	Job		266		266	
Block Pilaster							
	Demolish	Ea.		193		193	Includes material and labor to install block pilaster for fence.
	Install	Ea.	185	196		381	
	Demolish and Install	Ea.	185	389		574	
	Reinstall	Ea.		196		196	
	Paint	Ea.	9.65	19.60		29.25	
	Minimum Charge	Job		266		266	
Block w / o Footing							
4"							
	Demolish	S.F.		.16	.42	.58	Cost includes material and labor to install 4" non-reinforced hollow lightweight block.
	Install	S.F.	2.04	4.45		6.49	
	Demolish and Install	S.F.	2.04	4.61	.42	7.07	
	Clean	S.F.	.26	1.35	.43	2.04	
	Paint	S.F.	.55	.84		1.39	
	Minimum Charge	Job		266		266	
4" Reinforced							
	Demolish	S.F.		2.50	1.65	4.15	Cost includes material and labor to install 4" reinforced hollow lightweight block.
	Install	S.F.	2.26	5.75		8.01	
	Demolish and Install	S.F.	2.26	8.25	1.65	12.16	
	Clean	S.F.	.26	1.35	.43	2.04	
	Paint	S.F.	.55	.84		1.39	
	Minimum Charge	Job		266		266	
6"							
	Demolish	S.F.		.22	.56	.78	Cost includes material and labor to install 6" non-reinforced hollow lightweight block.
	Install	S.F.	3.89	4.90		8.79	
	Demolish and Install	S.F.	3.89	5.12	.56	9.57	
	Clean	S.F.	.26	1.35	.43	2.04	
	Paint	S.F.	.55	.84		1.39	
	Minimum Charge	Job		266		266	

Site Work

Fencing		Unit	Material	Labor	Equip.	Total	Specification
6" Reinforced							
	Demolish	S.F.		2.63	1.06	3.69	Cost includes material and labor to install 6" reinforced hollow lightweight block.
	Install	S.F.	4.09	6.15		10.24	
	Demolish and Install	S.F.	4.09	8.78	1.06	13.93	
	Clean	S.F.	.26	1.35	.43	2.04	
	Paint	S.F.	.55	.84		1.39	
	Minimum Charge	Job		266		266	
Cap for Block Wall							
	Demolish	L.F.		2.81		2.81	Includes labor and equipment to install precast concrete coping.
	Install	L.F.	8.40	13.05		21.45	
	Demolish and Install	L.F.	8.40	15.86		24.26	
	Clean	L.F.	.03	4.22		4.25	
	Paint	S.F.	.55	.84		1.39	
	Minimum Charge	Job		266		266	
Block Pilaster							
	Demolish	Ea.		193		193	Includes material and labor to install block pilaster for fence.
	Install	Ea.	185	196		381	
	Demolish and Install	Ea.	185	389		574	
	Reinstall	Ea.		196		196	
	Paint	Ea.	9.65	19.60		29.25	
	Minimum Charge	Job		266		266	
Chain Link							
3' High w / o Top Rail							
	Demolish	L.F.		3.54	.86	4.40	Includes material and labor to install residential galvanized fence 3' high with 1-3/8" steel post 10' O.C. set without concrete.
	Install	L.F.	6.70	2.50	1.01	10.21	
	Demolish and Install	L.F.	6.70	6.04	1.87	14.61	
	Reinstall	L.F.		2	.81	2.81	
	Clean	L.F.	.10	1.47		1.57	
	Minimum Charge	Job		620		620	
4' High w / o Top Rail							
	Demolish	L.F.		3.54	.86	4.40	Includes material and labor to install residential galvanized fence 4' high with 1-3/8" steel post 10' O.C. set without concrete.
	Install	L.F.	7.60	3.09	1.25	11.94	
	Demolish and Install	L.F.	7.60	6.63	2.11	16.34	
	Reinstall	L.F.		2.47	1	3.47	
	Clean	L.F.	.13	1.62		1.75	
	Minimum Charge	Job		620		620	
5' High w / o Top Rail							
	Demolish	L.F.		3.54	.86	4.40	Includes material and labor to install residential galvanized fence 5' high with 1-3/8" steel post 10' O.C. set without concrete.
	Install	L.F.	8.90	4.04	1.64	14.58	
	Demolish and Install	L.F.	8.90	7.58	2.50	18.98	
	Reinstall	L.F.		3.23	1.31	4.54	
	Clean	L.F.	.17	1.80		1.97	
	Minimum Charge	Job		620		620	
3' High w / Top Rail							
	Demolish	L.F.		3.76	.91	4.67	Includes material and labor to install residential galvanized fence 3' high with 1-3/8" steel post 10' O.C. set without concrete.
	Install	L.F.	9.20	2.63	1.07	12.90	
	Demolish and Install	L.F.	9.20	6.39	1.98	17.57	
	Reinstall	L.F.		2.10	.85	2.95	
	Clean	L.F.	.10	1.50		1.60	
	Minimum Charge	Job		620		620	
4' High w / Top Rail							
	Demolish	L.F.		3.76	.91	4.67	Includes material and labor to install residential galvanized fence 4' high with 1-5/8" steel post 10' O.C. set without concrete and 1-5/8" top rail with sleeves.
	Install	L.F.	10.05	3.28	1.33	14.66	
	Demolish and Install	L.F.	10.05	7.04	2.24	19.33	
	Reinstall	L.F.		2.63	1.07	3.70	
	Clean	L.F.	.13	1.65		1.78	
	Minimum Charge	Job		620		620	

Site Work




Fencing		Unit	Material	Labor	Equip.	Total	Specification
5' High w / Top Rail							
	Demolish	L.F.		3.76	.91	4.67	Includes material and labor to install residential galvanized fence 5' high with 1-5/8" steel post 10' O.C. set without concrete and 1-5/8" top rail with sleeves.
	Install	L.F.	11.45	4.38	1.78	17.61	
	Demolish and Install	L.F.	11.45	8.14	2.69	22.28	
	Reinstall	L.F.		3.50	1.42	4.92	
	Clean	L.F.	.17	1.84		2.01	
	Minimum Charge	Job		620		620	
6' High w / Top Rail							
	Demolish	L.F.		3.76	.91	4.67	Includes material and labor to install residential galvanized fence 6' high with 2" steel post 10' O.C. set without concrete and 1-3/8" top rail with sleeves.
	Install	L.F.	12.95	6.55	2.66	22.16	
	Demolish and Install	L.F.	12.95	10.31	3.57	26.83	
	Reinstall	L.F.		5.25	2.13	7.38	
	Clean	L.F.	.19	2.08		2.27	
	Minimum Charge	Job		620		620	
Barbed Wire							
	Demolish	L.F.		2.09		2.09	Cost includes material and labor to install 3 strand galvanized barbed wire fence.
	Install	L.F.	.66	.81	.41	1.88	
	Demolish and Install	L.F.	.66	2.90	.41	3.97	
	Reinstall	L.F.		.65	.33	.98	
	Minimum Charge	Job		620	400	1020	
6' Redwood							
	Demolish	L.F.		13.80		13.80	Cost includes material and labor to install 6' high redwood fencing.
	Install	L.F.	45.50	10.50	4.26	60.26	
	Demolish and Install	L.F.	45.50	24.30	4.26	74.06	
	Reinstall	L.F.		8.40	3.41	11.81	
	Clean	L.F.	.19	1.88		2.07	
	Paint	L.F.	1.52	4.64		6.16	
	Minimum Charge	Job		620		620	
6' Red Cedar							
	Demolish	L.F.		13.80		13.80	Cost includes material and labor to install 6' cedar fence.
	Install	L.F.	29.50	10.50	4.26	44.26	
	Demolish and Install	L.F.	29.50	24.30	4.26	58.06	
	Reinstall	L.F.		8.40	3.41	11.81	
	Clean	L.F.	.19	1.88		2.07	
	Paint	L.F.	1.52	4.64		6.16	
	Minimum Charge	Job		620		620	
6' Shadowbox							
	Demolish	L.F.		13.80		13.80	Cost includes material and labor to install 6' pressure treated pine fence.
	Install	L.F.	49.50	8.75	3.55	61.80	
	Demolish and Install	L.F.	49.50	22.55	3.55	75.60	
	Reinstall	L.F.		7	2.84	9.84	
	Clean	L.F.	.19	1.88		2.07	
	Paint	L.F.	1.52	4.64		6.16	
	Minimum Charge	Job		620		620	
3' Picket							
	Demolish	L.F.		13.80		13.80	Includes material, labor and equipment to install pressure treated pine picket fence.
	Install	L.F.	17.90	9.40	3.80	31.10	
	Demolish and Install	L.F.	17.90	23.20	3.80	44.90	
	Reinstall	L.F.		7.50	3.04	10.54	
	Clean	L.F.	.10	1.62		1.72	
	Paint	L.F.	.76	2.52		3.28	
	Minimum Charge	Job		620		620	

Site Work

Fencing		Unit	Material	Labor	Equip.	Total	Specification
Wrought Iron							
	Demolish	L.F.		30		30	Cost includes material and labor to install 5' high wrought iron fence with pickets at 4-1/2" O.C.
	Install	L.F.	54	16.55		70.55	
	Demolish and Install	L.F.	54	46.55		100.55	
	Reinstall	L.F.		13.23		13.23	
	Clean	L.F.		1.62		1.62	
	Paint	L.F.	7.15	5.20		12.35	
	Minimum Charge	Job		620		620	
Post							
Dirt Based Wood							
	Demolish	Ea.		34.50		34.50	Includes material and labor to install wood post set in earth.
	Install	Ea.	72.50	124		196.50	
	Demolish and Install	Ea.	72.50	158.50		231	
	Reinstall	Ea.		99.21		99.21	
	Clean	Ea.		5.05		5.05	
	Paint	Ea.	1.66	1.76		3.42	
	Minimum Charge	Job		620		620	
Concrete Based Wood							
	Demolish	Ea.		50	12.20	62.20	Includes material and labor to install wood post set in concrete.
	Install	Ea.	74.50	155		229.50	
	Demolish and Install	Ea.	74.50	205	12.20	291.70	
	Clean	Ea.		5.05		5.05	
	Paint	Ea.	1.66	1.76		3.42	
	Minimum Charge	Job		620		620	
Block Pilaster							
	Demolish	Ea.		193		193	Includes material and labor to install block pilaster for fence.
	Install	Ea.	185	196		381	
	Demolish and Install	Ea.	185	389		574	
	Reinstall	Ea.		196		196	
	Paint	Ea.	9.65	19.60		29.25	
	Minimum Charge	Job		266		266	
Gate							
Chain Link							
	Demolish	Ea.		46		46	Cost includes material and labor to install 3' wide chain link pass gate and hardware.
	Install	Ea.	167	69		236	
	Demolish and Install	Ea.	167	115		282	
	Reinstall	Ea.		55.11		55.11	
	Clean	Ea.		5.60		5.60	
	Minimum Charge	Job		620		620	
Redwood							
	Demolish	Ea.		39.50		39.50	Includes material, labor and equipment to install redwood pass gate and hardware.
	Install	Ea.	705	69		774	
	Demolish and Install	Ea.	705	108.50		813.50	
	Reinstall	Ea.		55.11		55.11	
	Clean	Ea.		5.60		5.60	
	Paint	Ea.	2.50	8.80		11.30	
	Minimum Charge	Job		620		620	
Red Cedar							
	Demolish	Ea.		39.50		39.50	Cost includes material and labor to install 3' wide red cedar pass gate and hardware.
	Install	Ea.	345	69		414	
	Demolish and Install	Ea.	345	108.50		453.50	
	Reinstall	Ea.		55.11		55.11	
	Clean	Ea.		5.60		5.60	
	Paint	Ea.	2.50	8.80		11.30	
	Minimum Charge	Job		620		620	

Site Work

Fencing		Unit	Material	Labor	Equip.	Total	Specification
Wrought Iron							
	Demolish	Ea.		30		30	Includes material, labor and equipment to install wrought iron gate with hardware.
	Install	Ea.	2275	155		2430	
	Demolish and Install	Ea.	2275	185		2460	
	Reinstall	Ea.		124.01		124.01	
	Clean	Ea.		5.60		5.60	
	Paint	Ea.	14.35	8.80		23.15	
	Minimum Charge	Job		620		620	

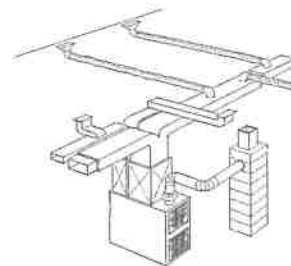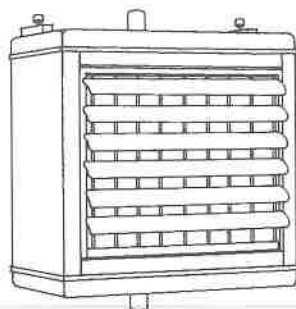

Fire-extinguishing System

Space Heater

Hot-air Furnace

Plumbing		Unit	Material	Labor	Equip.	Total	Specification
Components							
3/4" Supply							
	Demolish	L.F.		3.35		3.35	Includes material and labor to install type L copper tubing including couplings and hangers at 10' O.C.
	Install	L.F.	7.25	7.95		15.20	
	Demolish and Install	L.F.	7.25	11.30		18.55	
	Reinstall	L.F.		7.93		7.93	
	Minimum Charge	Job		300		300	
1/2" Fixture Supply							
	Install	Ea.	73	201		274	Includes labor and materials to install supply pipe only to a plumbing fixture.
2" Single Vent Stack							
	Demolish	Ea.		56		56	Includes material and labor to install PVC vent stack pipe with couplings at 10' O.C.
	Install	Ea.	30.50	300		330.50	
	Demolish and Install	Ea.	30.50	356		386.50	
	Reinstall	Ea.		301.40		301.40	
	Minimum Charge	Job		300		300	
4" Drain							
	Demolish	L.F.		4.47		4.47	Includes material and labor to install DVW type PVC pipe with couplings at 10' O.C. and 3 strap hangers per 10' run.
	Install	L.F.	9.75	9.85		19.60	
	Demolish and Install	L.F.	9.75	14.32		24.07	
	Reinstall	L.F.		9.87		9.87	
	Minimum Charge	Job		300		300	
1-1/2" Drain							
	Demolish	L.F.		3.35		3.35	Includes material and labor to install DVW type PVC pipe with couplings at 10' O.C. and 3 strap hangers per 10' run.
	Install	L.F.	3.40	6.40		9.80	
	Demolish and Install	L.F.	3.40	9.75		13.15	
	Reinstall	L.F.		6.41		6.41	
	Minimum Charge	Job		300		300	
Maintenance							
Flush Out / Unclog							
	Clean	Job		300		300	Includes 4 hour minimum labor charge for a plumber.
	Minimum Charge	Job		300		300	
Vent Cap							
Large							
	Demolish	Ea.		15.20		15.20	Includes labor and material to install a PVC plumbing pipe vent cap.
	Install	Ea.	153	27.50		180.50	
	Demolish and Install	Ea.	153	42.70		195.70	
	Clean	Ea.	.45	9.20		9.65	
	Paint	Ea.	.43	10		10.43	
	Minimum Charge	Job		151		151	

Rough Mechanical

Plumbing		Unit	Material	Labor	Equip.	Total	Specification
Medium							
	Demolish	Ea.		15.20		15.20	Includes labor and material to install a PVC plumbing pipe vent cap.
	Install	Ea.	142	26		168	
	Demolish and Install	Ea.	142	41.20		183.20	
	Clean	Ea.	.45	9.20		9.65	
	Paint	Ea.	.43	10		10.43	
	Minimum Charge	Job		151		151	
Small							
	Demolish	Ea.		15.20		15.20	Includes material and labor to install a PVC plumbing pipe vent cap.
	Install	Ea.	11.20	25		36.20	
	Demolish and Install	Ea.	11.20	40.20		51.40	
	Clean	Ea.	.45	9.20		9.65	
	Paint	Ea.	.43	10		10.43	
	Minimum Charge	Job		151		151	

Plumbing		Unit	Material	Labor	Equip.	Total	Specification
Sump Pump							
1/4 HP							
	Demolish	Ea.		60.50		60.50	Includes material and labor to install a submersible sump pump.
	Install	Ea.	209	94		303	
	Demolish and Install	Ea.	209	154.50		363.50	
	Reinstall	Ea.		75.35		75.35	
	Clean	Ea.	1.14	25.50		26.64	
	Minimum Charge	Job		300		300	
1/3 HP							
	Demolish	Ea.		60.50		60.50	Includes material and labor to install a submersible sump pump.
	Install	Ea.	212	100		312	
	Demolish and Install	Ea.	212	160.50		372.50	
	Reinstall	Ea.		80.37		80.37	
	Clean	Ea.	1.14	25.50		26.64	
	Minimum Charge	Job		300		300	
1/2 HP							
	Demolish	Ea.		60.50		60.50	Includes material and labor to install a submersible sump pump.
	Install	Ea.	315	112		427	
	Demolish and Install	Ea.	315	172.50		487.50	
	Reinstall	Ea.		89.30		89.30	
	Clean	Ea.	1.14	25.50		26.64	
	Minimum Charge	Job		300		300	
Clean and Service							
	Clean	Ea.		37.50		37.50	Includes labor to clean and service a sump pump.
	Minimum Charge	Job		300		300	

Water Heater		Unit	Material	Labor	Equip.	Total	Specification
Electric							
30 Gallon							
	Demolish	Ea.		188		188	Includes material and labor to install a 30 gallon electric water heater.
	Install	Ea.	925	274		1199	
	Demolish and Install	Ea.	925	462		1387	
	Reinstall	Ea.		219.20		219.20	
	Clean	Ea.	1.14	25.50		26.64	
	Minimum Charge	Job		300		300	

Rough Mechanical

Water Heater		Unit	Material	Labor	Equip.	Total	Specification
40 Gallon							
	Demolish	Ea.		188		188	Includes material and labor to install a 40 gallon electric water heater.
	Install	Ea.	785	300		1085	
	Demolish and Install	Ea.	785	488		1273	
	Reinstall	Ea.		241.12		241.12	
	Clean	Ea.	1.14	25.50		26.64	
	Minimum Charge	Job		300		300	
52 Gallon							
	Demolish	Ea.		188		188	Includes material and labor to install a 52 gallon electric water heater.
	Install	Ea.	1025	300		1325	
	Demolish and Install	Ea.	1025	488		1513	
	Reinstall	Ea.		241.12		241.12	
	Clean	Ea.	1.14	25.50		26.64	
	Minimum Charge	Job		300		300	
82 Gallon							
	Demolish	Ea.		188		188	Includes material and labor to install an 82 gallon electric water heater.
	Install	Ea.	1600	375		1975	
	Demolish and Install	Ea.	1600	563		2163	
	Reinstall	Ea.		301.40		301.40	
	Clean	Ea.	1.14	25.50		26.64	
	Minimum Charge	Job		300		300	
Gas-fired							
30 Gallon Gas-fired							
	Demolish	Ea.		232		232	Includes material and labor to install a 30 gallon gas water heater.
	Install	Ea.	1150	300		1450	
	Demolish and Install	Ea.	1150	532		1682	
	Reinstall	Ea.		241.12		241.12	
	Clean	Ea.	1.14	25.50		26.64	
	Minimum Charge	Job		300		300	
30 Gallon Gas-fired, Flue							
	Install	Ea.	60	86		146	Includes labor and materials to install a flue for a water heater (up to 50 gallon size).
	Minimum Charge	Job		300		300	
40 Gallon Gas-fired							
	Demolish	Ea.		232		232	Includes material and labor to install a 40 gallon gas water heater.
	Install	Ea.	885	315		1200	
	Demolish and Install	Ea.	885	547		1432	
	Reinstall	Ea.		253.81		253.81	
	Clean	Ea.	1.14	25.50		26.64	
	Minimum Charge	Job		300		300	
40 Gallon Gas-fired, Flue							
	Install	Ea.	60	86		146	Includes labor and materials to install a flue for a water heater (up to 50 gallon size).
	Minimum Charge	Job		300		300	
50 Gallon Gas-fired							
	Demolish	Ea.		232		232	Includes material and labor to install a 50 gallon gas water heater.
	Install	Ea.	895	335		1230	
	Demolish and Install	Ea.	895	567		1462	
	Reinstall	Ea.		267.91		267.91	
	Clean	Ea.	1.14	25.50		26.64	
	Minimum Charge	Job		300		300	
50 Gallon Gas-fired, Flue							
	Install	Ea.	60	86		146	Includes labor and materials to install a flue for a water heater (up to 50 gallon size).
	Minimum Charge	Job		300		300	

Rough Mechanical

Water Heater		Unit	Material	Labor	Equip.	Total	Specification
Solar Hot Water System							
Water Heater							
	Demolish	Ea.		151		151	Includes material and labor to install a solar hot water heat exchanger storage tank, 100 gallon.
	Install	Ea.	1750	400		2150	
	Demolish and Install	Ea.	1750	551		2301	
	Reinstall	Ea.		321.49		321.49	
	Minimum Charge	Job		320		320	
Solar Panel							
	Demolish	S.F.		2.20		2.20	Includes material and labor to install solar panel.
	Install	S.F.	40	3.97		43.97	
	Demolish and Install	S.F.	40	6.17		46.17	
	Reinstall	S.F.		3.17		3.17	
	Minimum Charge	Job		320		320	
Repair Plumbing							
	Install	Job		320		320	Includes 4 hour minimum labor charge for a steamfitter or pipefitter.
	Minimum Charge	Job		320		320	
Insulating Wrap							
	Demolish	Ea.		7		7	Includes material and labor to install insulating wrap around a 100 gallon solar hot water heat exchanger storage tank.
	Install	Ea.	22.50	18.85		41.35	
	Demolish and Install	Ea.	22.50	25.85		48.35	
	Reinstall	Ea.		15.07		15.07	
	Minimum Charge	Job		300		300	
Water Softener							
	Demolish	Ea.		112		112	Includes material and labor to install a 14 GPM water softener.
	Install	Ea.	2975	271		3246	
	Demolish and Install	Ea.	2975	383		3358	
	Reinstall	Ea.		217.06		217.06	
	Clean	Ea.	1.14	25.50		26.64	
	Minimum Charge	Ea.		300		300	

Ductwork		Unit	Material	Labor	Equip.	Total	Specification
Galvanized, Square or Rectangular							
6"							
	Demolish	L.F.		2.73		2.73	Includes material and labor to install rectangular ductwork with a greatest dimension of 6".
	Install	L.F.	8.20	13.10		21.30	
	Demolish and Install	L.F.	8.20	15.83		24.03	
	Reinstall	L.F.		10.48		10.48	
	Clean	L.F.		3.14		3.14	
	Minimum Charge	Job		295		295	
8"							
	Demolish	L.F.		2.73		2.73	Includes material and labor to install rectangular ductwork with a greatest dimension of 8".
	Install	L.F.	10.90	16.85		27.75	
	Demolish and Install	L.F.	10.90	19.58		30.48	
	Reinstall	L.F.		13.48		13.48	
	Clean	L.F.		4.19		4.19	
	Minimum Charge	Job		295		295	
10"							
	Demolish	L.F.		2.73		2.73	Includes material and labor to install rectangular ductwork with a greatest dimension of 10".
	Install	L.F.	13.65	22		35.65	
	Demolish and Install	L.F.	13.65	24.73		38.38	
	Reinstall	L.F.		17.47		17.47	
	Clean	L.F.		5.25		5.25	
	Minimum Charge	Job		295		295	

Rough Mechanical

Ductwork		Unit	Material	Labor	Equip.	Total	Specification
Galvanized, Spiral							
4"							
	Demolish	L.F.		3.28		3.28	Cost includes material and labor to install 4" diameter spiral pre-formed steel galvanized ductwork.
	Install	L.F.	5.50	2.95		8.45	
	Demolish and Install	L.F.	5.50	6.23		11.73	
	Reinstall	L.F.		2.36		2.36	
	Clean	L.F.		1.65		1.65	
	Minimum Charge	Job		295		295	
6"							
	Demolish	L.F.		3.28		3.28	Cost includes material and labor to install 6" diameter spiral pre-formed steel galvanized ductwork.
	Install	L.F.	7.70	3.79		11.49	
	Demolish and Install	L.F.	7.70	7.07		14.77	
	Reinstall	L.F.		3.03		3.03	
	Clean	L.F.		2.47		2.47	
	Minimum Charge	Job		295		295	
8"							
	Demolish	L.F.		3.28		3.28	Cost includes material and labor to install 8" diameter spiral pre-formed steel galvanized ductwork.
	Install	L.F.	8.90	5.30		14.20	
	Demolish and Install	L.F.	8.90	8.58		17.48	
	Reinstall	L.F.		4.25		4.25	
	Clean	L.F.		3.29		3.29	
	Minimum Charge	Job		295		295	
10"							
	Demolish	L.F.		4.09		4.09	Cost includes material and labor to install 10" diameter spiral pre-formed steel galvanized ductwork.
	Install	L.F.	11	6.65		17.65	
	Demolish and Install	L.F.	11	10.74		21.74	
	Reinstall	L.F.		5.31		5.31	
	Clean	L.F.		4.12		4.12	
	Minimum Charge	Job		295		295	
12"							
	Demolish	L.F.		5.45		5.45	Cost includes material and labor to install 12" diameter spiral pre-formed steel galvanized ductwork.
	Install	L.F.	12.45	8.85		21.30	
	Demolish and Install	L.F.	12.45	14.30		26.75	
	Reinstall	L.F.		7.08		7.08	
	Clean	L.F.		4.94		4.94	
	Minimum Charge	Job		295		295	
16"							
	Demolish	L.F.		10.90		10.90	Cost includes material and labor to install 16" diameter spiral pre-formed steel galvanized ductwork.
	Install	L.F.	20.50	17.70		38.20	
	Demolish and Install	L.F.	20.50	28.60		49.10	
	Reinstall	L.F.		14.15		14.15	
	Clean	L.F.		6.60		6.60	
	Minimum Charge	Job		295		295	
Flexible Fiberglass							
6" Non-insulated							
	Demolish	L.F.		2.52		2.52	Cost includes material and labor to install 6" diameter non-insulated flexible fiberglass fabric on corrosion resistant metal ductwork.
	Install	L.F.	3.78	3.79		7.57	
	Demolish and Install	L.F.	3.78	6.31		10.09	
	Reinstall	L.F.		3.03		3.03	
	Clean	L.F.		2.47		2.47	
	Minimum Charge	Job		295		295	
8" Non-insulated							
	Demolish	L.F.		3.64		3.64	Cost includes material and labor to install 8" diameter non-insulated flexible fiberglass fabric on corrosion resistant metal ductwork.
	Install	L.F.	4.98	5.30		10.28	
	Demolish and Install	L.F.	4.98	8.94		13.92	
	Reinstall	L.F.		4.25		4.25	
	Clean	L.F.		3.29		3.29	
	Minimum Charge	Job		295		295	

Rough Mechanical

Ductwork		Unit	Material	Labor	Equip.	Total	Specification
10" Non-insulated							
	Demolish	L.F.		4.68		4.68	Cost includes material and labor to install 10" diameter non-insulated flexible fiberglass fabric on corrosion resistant metal ductwork.
	Install	L.F.	6.15	6.65		12.80	
	Demolish and Install	L.F.	6.15	11.33		17.48	
	Reinstall	L.F.		5.31		5.31	
	Clean	L.F.		4.12		4.12	
	Minimum Charge	Job		295		295	
12" Non-insulated							
	Demolish	L.F.		6.55		6.55	Cost includes material and labor to install 12" diameter non-insulated flexible fiberglass fabric on corrosion resistant metal ductwork.
	Install	L.F.	7.70	8.85		16.55	
	Demolish and Install	L.F.	7.70	15.40		23.10	
	Reinstall	L.F.		7.08		7.08	
	Clean	L.F.		4.94		4.94	
	Minimum Charge	Job		295		295	
4" Insulated							
	Demolish	L.F.		1.93		1.93	Cost includes material and labor to install 4" diameter insulated flexible fiberglass fabric on corrosion resistant metal ductwork.
	Install	L.F.	4.74	3.12		7.86	
	Demolish and Install	L.F.	4.74	5.05		9.79	
	Reinstall	L.F.		2.50		2.50	
	Clean	L.F.		1.65		1.65	
	Minimum Charge	Job		295		295	
6" Insulated							
	Demolish	L.F.		2.52		2.52	Cost includes material and labor to install 6" diameter insulated flexible fiberglass fabric on corrosion resistant metal ductwork.
	Install	L.F.	5.60	4.08		9.68	
	Demolish and Install	L.F.	5.60	6.60		12.20	
	Reinstall	L.F.		3.27		3.27	
	Clean	L.F.		2.47		2.47	
	Minimum Charge	Job		295		295	
8" Insulated							
	Demolish	L.F.		3.64		3.64	Cost includes material and labor to install 8" diameter insulated flexible fiberglass fabric on corrosion resistant metal ductwork.
	Install	L.F.	6.90	5.90		12.80	
	Demolish and Install	L.F.	6.90	9.54		16.44	
	Reinstall	L.F.		4.72		4.72	
	Clean	L.F.		3.29		3.29	
	Minimum Charge	Job		295		295	
10" Insulated							
	Demolish	L.F.		4.68		4.68	Cost includes material and labor to install 10" diameter insulated flexible fiberglass fabric on corrosion resistant metal ductwork.
	Install	L.F.	8.45	7.60		16.05	
	Demolish and Install	L.F.	8.45	12.28		20.73	
	Reinstall	L.F.		6.07		6.07	
	Clean	L.F.		4.12		4.12	
	Minimum Charge	Job		295		295	
12" Insulated							
	Demolish	L.F.		6.55		6.55	Cost includes material and labor to install 12" diameter insulated flexible fiberglass fabric on corrosion resistant metal ductwork.
	Install	L.F.	10.10	10.60		20.70	
	Demolish and Install	L.F.	10.10	17.15		27.25	
	Reinstall	L.F.		8.49		8.49	
	Clean	L.F.		4.94		4.94	
	Minimum Charge	Job		295		295	

Rough Mechanical

Heating		Unit	Material	Labor	Equip.	Total	Specification
Hot Water Baseboard							
Baseboard							
	Demolish	L.F.		10.95		10.95	Includes material and labor to install baseboard radiation.
	Install	L.F.	14.85	19.20		34.05	
	Demolish and Install	L.F.	14.85	30.15		45	
	Reinstall	L.F.		15.36		15.36	
	Clean	L.F.	1.14	6.35		7.49	
	Minimum Charge	Job		300		300	
3'	Demolish	Ea.		33.50		33.50	Includes material and labor to install fin tube baseboard radiation in 3' sections.
	Install	Ea.	29.50	64		93.50	
	Demolish and Install	Ea.	29.50	97.50		127	
	Reinstall	Ea.		51.19		51.19	
	Clean	Ea.	.33	19.30		19.63	
	Minimum Charge	Job		300		300	
4'	Demolish	Ea.		44.50		44.50	Includes material and labor to install fin tube baseboard radiation in 4' sections.
	Install	Ea.	39.50	72		111.50	
	Demolish and Install	Ea.	39.50	116.50		156	
	Reinstall	Ea.		57.58		57.58	
	Clean	Ea.	.65	25.50		26.15	
	Minimum Charge	Job		300		300	
5'	Demolish	Ea.		56		56	Includes material and labor to install fin tube baseboard radiation in 5' sections.
	Install	Ea.	49.50	82.50		132	
	Demolish and Install	Ea.	49.50	138.50		188	
	Reinstall	Ea.		65.81		65.81	
	Clean	Ea.	.65	31		31.65	
	Minimum Charge	Job		300		300	
6'	Demolish	Ea.		67		67	Includes material and labor to install fin tube baseboard radiation in 6' sections.
	Install	Ea.	59.50	96		155.50	
	Demolish and Install	Ea.	59.50	163		222.50	
	Reinstall	Ea.		76.78		76.78	
	Clean	Ea.	.65	37		37.65	
	Minimum Charge	Job		300		300	
7'	Demolish	Ea.		74.50		74.50	Includes material and labor to install fin tube baseboard radiation in 7' sections.
	Install	Ea.	69.50	121		190.50	
	Demolish and Install	Ea.	69.50	195.50		265	
	Reinstall	Ea.		96.45		96.45	
	Clean	Ea.	.81	45		45.81	
	Minimum Charge	Job		300		300	
9'	Demolish	Ea.		112		112	Includes material and labor to install fin tube baseboard radiation in 9' sections.
	Install	Ea.	89	172		261	
	Demolish and Install	Ea.	89	284		373	
	Reinstall	Ea.		137.78		137.78	
	Clean	Ea.	1.31	58		59.31	
	Minimum Charge	Job		300		300	

Rough Mechanical

Heating		Unit	Material	Labor	Equip.	Total	Specification
Cabinet Unit Heater							
50 MBH							
	Demolish	Ea.		57.50		57.50	Includes material and labor to install a cabinet space heater with an output of 50 MBH.
	Install	Ea.	2075	165		2240	
	Demolish and Install	Ea.	2075	222.50		2297.50	
	Reinstall	Ea.		131.62		131.62	
	Clean	Ea.	.81	50.50		51.31	
	Minimum Charge	Job		320		320	
75 MBH							
	Demolish	Ea.		57.50		57.50	Includes material and labor to install a cabinet space heater with an output of 75 MBH.
	Install	Ea.	1150	192		1342	
	Demolish and Install	Ea.	1150	249.50		1399.50	
	Reinstall	Ea.		153.56		153.56	
	Clean	Ea.	.81	50.50		51.31	
	Minimum Charge	Job		320		320	
125 MBH							
	Demolish	Ea.		69		69	Includes material and labor to install a cabinet space heater with an output of 125 MBH.
	Install	Ea.	1450	230		1680	
	Demolish and Install	Ea.	1450	299		1749	
	Reinstall	Ea.		184.27		184.27	
	Clean	Ea.	.81	50.50		51.31	
	Minimum Charge	Job		320		320	
175 MBH							
	Demolish	Ea.		86.50		86.50	Includes material and labor to install a cabinet space heater with an output of 175 MBH.
	Install	Ea.	4150	330		4480	
	Demolish and Install	Ea.	4150	416.50		4566.50	
	Reinstall	Ea.		263.24		263.24	
	Clean	Ea.	.81	50.50		51.31	
	Minimum Charge	Job		320		320	

Furnace Unit		Unit	Material	Labor	Equip.	Total	Specification
Wall (gas-fired)							
25 MBH w / Thermostat							
	Demolish	Ea.		133		133	Includes material and labor to install a gas fired hot air furnace rated at 25 MBH.
	Install	Ea.	1125	212		1337	
	Demolish and Install	Ea.	1125	345		1470	
	Reinstall	Ea.		169.86		169.86	
	Clean	Ea.	1.64	112		113.64	
	Minimum Charge	Job		320		320	
35 MBH w / Thermostat							
	Demolish	Ea.		133		133	Includes material and labor to install a gas fired hot air furnace rated at 35 MBH.
	Install	Ea.	1175	236		1411	
	Demolish and Install	Ea.	1175	369		1544	
	Reinstall	Ea.		188.73		188.73	
	Clean	Ea.	1.64	112		113.64	
	Minimum Charge	Job		320		320	
50 MBH w / Thermostat							
	Demolish	Ea.		133		133	Includes material and labor to install a gas fired hot air furnace rated at 50 MBH.
	Install	Ea.	3125	265		3390	
	Demolish and Install	Ea.	3125	398		3523	
	Reinstall	Ea.		212.32		212.32	
	Clean	Ea.	1.64	112		113.64	
	Minimum Charge	Job		320		320	

Rough Mechanical

Furnace Unit		Unit	Material	Labor	Equip.	Total	Specification
60 MBH w / Thermostat							
	Demolish	Ea.		133		133	Includes material and labor to install a gas fired hot air furnace rated at 60 MBH.
	Install	Ea.	2075	295		2370	
	Demolish and Install	Ea.	2075	428		2503	
	Reinstall	Ea.		235.91		235.91	
	Clean	Ea.	1.64	112		113.64	
	Minimum Charge	Job		320		320	
Floor (gas-fired)							
30 MBH w / Thermostat							
	Demolish	Ea.		133		133	Includes material and labor to install a gas fired hot air floor furnace rated at 30 MBH.
	Install	Ea.	2675	212		2887	
	Demolish and Install	Ea.	2675	345		3020	
	Reinstall	Ea.		169.86		169.86	
	Clean	Ea.	1.64	112		113.64	
	Minimum Charge	Job		320		320	
50 MBH w / Thermostat							
	Demolish	Ea.		133		133	Includes material and labor to install a gas fired hot air floor furnace rated at 50 MBH.
	Install	Ea.	3050	265		3315	
	Demolish and Install	Ea.	3050	398		3448	
	Reinstall	Ea.		212.32		212.32	
	Clean	Ea.	1.64	112		113.64	
	Minimum Charge	Job		320		320	
Gas Forced Air							
50 MBH							
	Demolish	Ea.		133		133	Includes material and labor to install an up flow gas fired hot air furnace rated at 50 MBH.
	Install	Ea.	1375	265		1640	
	Demolish and Install	Ea.	1375	398		1773	
	Reinstall	Ea.		212.32		212.32	
	Clean	Ea.	1.64	112		113.64	
	Minimum Charge	Job		320		320	
80 MBH							
	Demolish	Ea.		133		133	Includes material and labor to install an up flow gas fired hot air furnace rated at 80 MBH.
	Install	Ea.	1675	295		1970	
	Demolish and Install	Ea.	1675	428		2103	
	Reinstall	Ea.		235.91		235.91	
	Clean	Ea.	1.64	112		113.64	
	Minimum Charge	Job		320		320	
100 MBH							
	Demolish	Ea.		133		133	Includes material and labor to install an up flow gas fired hot air furnace rated at 100 MBH.
	Install	Ea.	1675	330		2005	
	Demolish and Install	Ea.	1675	463		2138	
	Reinstall	Ea.		265.40		265.40	
	Clean	Ea.	1.64	112		113.64	
	Minimum Charge	Job		320		320	
120 MBH							
	Demolish	Ea.		133		133	Includes material and labor to install an up flow gas fired hot air furnace rated at 120 MBH.
	Install	Ea.	1700	355		2055	
	Demolish and Install	Ea.	1700	488		2188	
	Reinstall	Ea.		283.09		283.09	
	Clean	Ea.	1.64	112		113.64	
	Minimum Charge	Job		320		320	

Rough Mechanical

Furnace Unit		Unit	Material	Labor	Equip.	Total	Specification
Electric Forced Air							
31.4 MBH							
	Demolish	Ea.		133		133	Includes material and labor to install an electric hot air furnace rated at 31.4 MBH.
	Install	Ea.	2625	310		2935	
	Demolish and Install	Ea.	2625	443		3068	
	Reinstall	Ea.		246.08		246.08	
	Clean	Ea.	1.64	112		113.64	
	Minimum Charge	Job		320		320	
47.1 MBH							
	Demolish	Ea.		133		133	Includes material and labor to install an electric hot air furnace rated at 47.1 MBH.
	Install	Ea.	3000	320		3320	
	Demolish and Install	Ea.	3000	453		3453	
	Reinstall	Ea.		257.53		257.53	
	Clean	Ea.	1.64	112		113.64	
	Minimum Charge	Job		320		320	
62.9 MBH							
	Demolish	Ea.		133		133	Includes material and labor to install an electric hot air furnace rated at 62.9 MBH.
	Install	Ea.	3200	345		3545	
	Demolish and Install	Ea.	3200	478		3678	
	Reinstall	Ea.		276.84		276.84	
	Clean	Ea.	1.64	112		113.64	
	Minimum Charge	Job		320		320	
78.5 MBH							
	Demolish	Ea.		133		133	Includes material and labor to install an electric hot air furnace rated at 78.5 MBH.
	Install	Ea.	4350	355		4705	
	Demolish and Install	Ea.	4350	488		4838	
	Reinstall	Ea.		283.94		283.94	
	Clean	Ea.	1.64	112		113.64	
	Minimum Charge	Job		320		320	
110 MBH							
	Demolish	Ea.		133		133	Includes material and labor to install an electric hot air furnace rated at 110 MBH.
	Install	Ea.	5850	375		6225	
	Demolish and Install	Ea.	5850	508		6358	
	Reinstall	Ea.		299.29		299.29	
	Clean	Ea.	1.64	112		113.64	
	Minimum Charge	Job		320		320	
A/C Junction Box							
	Install	Ea.	86	161		247	Includes labor and materials to install a heating system emergency shut-off switch. Cost includes up to 40 feet of non-metallic cable.
	Minimum Charge	Job		320		320	

Boiler		Unit	Material	Labor	Equip.	Total	Specification
Gas-Fired							
60 MBH							
	Demolish	Ea.		1175		1175	Includes material and labor to install a gas fired cast iron boiler rated at 60 MBH.
	Install	Ea.	4200	2100		6300	
	Demolish and Install	Ea.	4200	3275		7475	
	Reinstall	Ea.		1675.17		1675.17	
	Clean	Ea.	3.27	67.50		70.77	
	Minimum Charge	Job		320		320	

Rough Mechanical

Boiler		Unit	Material	Labor	Equip.	Total	Specification
Gas-Fired							
125 MBH							
	Demolish	Ea.		3200		3200	Includes material and labor to install a gas fired cast iron boiler rated at 125 MBH.
	Install	Ea.	4625	2550		7175	
	Demolish and Install	Ea.	4625	5750		10375	
	Reinstall	Ea.		2047.43		2047.43	
	Clean	Ea.	3.27	67.50		70.77	
	Minimum Charge	Job		320		320	
Gas-Fired							
400 MBH							
	Demolish	Ea.		3200		3200	Includes material and labor to install a gas fired cast iron boiler rated at 400 MBH.
	Install	Ea.	6125	3600		9725	
	Demolish and Install	Ea.	6125	6800		12925	
	Reinstall	Ea.		3599		3599	
	Clean	Ea.	3.27	67.50		70.77	
	Minimum Charge	Job		320		320	
Heat Pump		Unit	Material	Labor	Equip.	Total	Specification
2 Ton							
	Demolish	Ea.		320		320	Includes material and labor to install a 2 ton heat pump.
	Install	Ea.	2100	575		2675	
	Demolish and Install	Ea.	2100	895		2995	
	Reinstall	Ea.		460.67		460.67	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		320		320	
3 Ton							
	Demolish	Ea.		535		535	Includes material and labor to install a 3 ton heat pump.
	Install	Ea.	2575	960		3535	
	Demolish and Install	Ea.	2575	1495		4070	
	Reinstall	Ea.		767.79		767.79	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		320		320	
4 Ton							
	Demolish	Ea.		800		800	Includes material and labor to install a 4 ton heat pump.
	Install	Ea.	2975	1450		4425	
	Demolish and Install	Ea.	2975	2250		5225	
	Reinstall	Ea.		1151.68		1151.68	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		320		320	
5 Ton							
	Demolish	Ea.		1275		1275	Includes material and labor to install a 5 ton heat pump.
	Install	Ea.	3250	2300		5550	
	Demolish and Install	Ea.	3250	3575		6825	
	Reinstall	Ea.		1842.69		1842.69	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		320		320	
Thermostat							
	Demolish	Ea.		17.80		17.80	Includes material and labor to install an electric thermostat, 2 set back.
	Install	Ea.	195	80		275	
	Demolish and Install	Ea.	195	97.80		292.80	
	Reinstall	Ea.		64		64	
	Clean	Ea.	.07	12.65		12.72	
	Minimum Charge	Job		320		320	
A/C Junction Box							
	Install	Ea.	695	495		1190	Includes labor and materials to install a heat pump circuit including up to 40 feet of non-metallic cable.
	Minimum Charge	Job		325		325	

Rough Mechanical

Heating		Unit	Material	Labor	Equip.	Total	Specification
Electric Baseboard							
2' 6"	Demolish	L.F.		8.95		8.95	Includes material and labor to install electric baseboard heating elements.
	Install	L.F.	16.65	21.50		38.15	
	Demolish and Install	L.F.	16.65	30.45		47.10	
	Reinstall	L.F.		17.21		17.21	
	Clean	L.F.	1.14	6.35		7.49	
	Minimum Charge	Job		325		325	
3'	Demolish	Ea.		30		30	Includes material and labor to install a 2' 6" long section of electric baseboard heating elements.
	Install	Ea.	49	80.50		129.50	
	Demolish and Install	Ea.	49	110.50		159.50	
	Reinstall	Ea.		64.52		64.52	
	Clean	Ea.	.33	15.55		15.88	
	Minimum Charge	Job		325		325	
4'	Demolish	Ea.		32.50		32.50	Includes material and labor to install a 3' long section of electric baseboard heating elements.
	Install	Ea.	58	80.50		138.50	
	Demolish and Install	Ea.	58	113		171	
	Reinstall	Ea.		64.52		64.52	
	Clean	Ea.	.33	19.30		19.63	
	Minimum Charge	Job		325		325	
5'	Demolish	Ea.		36		36	Includes material and labor to install a 4' long section of electric baseboard heating elements.
	Install	Ea.	69.50	96.50		166	
	Demolish and Install	Ea.	69.50	132.50		202	
	Reinstall	Ea.		77.04		77.04	
	Clean	Ea.	.13	4.22		4.35	
	Minimum Charge	Job		325		325	
6'	Demolish	Ea.		40		40	Includes material and labor to install a 5' long section of electric baseboard heating elements.
	Install	Ea.	83	113		196	
	Demolish and Install	Ea.	83	153		236	
	Reinstall	Ea.		90.55		90.55	
	Clean	Ea.	.65	31		31.65	
	Minimum Charge	Job		325		325	
8'	Demolish	Ea.		45		45	Includes material and labor to install a 6' long section of electric baseboard heating elements.
	Install	Ea.	93	129		222	
	Demolish and Install	Ea.	93	174		267	
	Reinstall	Ea.		103.23		103.23	
	Clean	Ea.	.13	5.05		5.18	
	Minimum Charge	Job		325		325	
10'	Demolish	Ea.		59.50		59.50	Includes material and labor to install an 8' long section of electric baseboard heating elements.
	Install	Ea.	110	161		271	
	Demolish and Install	Ea.	110	220.50		330.50	
	Reinstall	Ea.		129.04		129.04	
	Clean	Ea.	.13	6.35		6.48	
	Minimum Charge	Job		325		325	
10'	Demolish	Ea.		71.50		71.50	Includes material and labor to install a 10' long section of electric baseboard heating elements.
	Install	Ea.	122	196		318	
	Demolish and Install	Ea.	122	267.50		389.50	
	Reinstall	Ea.		156.41		156.41	
	Clean	Ea.	1.31	63.50		64.81	
	Minimum Charge	Job		325		325	

Rough Mechanical

Heating		Unit	Material	Labor	Equip.	Total	Specification
Electric Radiant Wall Panel							
	Demolish	Ea.		48		48	Includes material and labor to install an 18" x 23" electric radiant heat wall panel.
	Install	Ea.	440	129		569	
	Demolish and Install	Ea.	440	177		617	
	Reinstall	Ea.		103.23		103.23	
	Clean	Ea.	.17	12.65		12.82	
	Minimum Charge	Job		325		325	
Heating Control		Unit	Material	Labor	Equip.	Total	Specification
Thermostat							
	Demolish	Ea.		17.80		17.80	Includes material and labor to install an electric thermostat, 2 set back.
	Install	Ea.	195	80		275	
	Demolish and Install	Ea.	195	97.80		292.80	
	Reinstall	Ea.		64		64	
	Clean	Ea.	.07	12.65		12.72	
	Minimum Charge	Job		320		320	
Air Conditioning		Unit	Material	Labor	Equip.	Total	Specification
Self-contained							
2 Ton							
	Demolish	Ea.		560		560	Includes material and labor to install a rooftop air conditioning unit, 2 ton. No hoisting is included.
	Install	Ea.	5650	995		6645	
	Demolish and Install	Ea.	5650	1555		7205	
	Reinstall	Ea.		993.68		993.68	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		320		320	
3 Ton							
	Demolish	Ea.		560		560	Includes material and labor to install a rooftop air conditioning unit, 3 ton. No hoisting is included.
	Install	Ea.	4950	1300		6250	
	Demolish and Install	Ea.	4950	1860		6810	
	Reinstall	Ea.		1310.22		1310.22	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		320		320	
4 Ton							
	Demolish	Ea.		560		560	Includes material and labor to install a rooftop air conditioning unit, 4 ton. No hoisting is included.
	Install	Ea.	6025	1525		7550	
	Demolish and Install	Ea.	6025	2085		8110	
	Reinstall	Ea.		1519.37		1519.37	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		320		320	
5 Ton							
	Demolish	Ea.		560		560	Includes material and labor to install a rooftop air conditioning unit, 5 ton. No hoisting is included.
	Install	Ea.	6075	1650		7725	
	Demolish and Install	Ea.	6075	2210		8285	
	Reinstall	Ea.		1640.57		1640.57	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		320		320	
Compressor							
2 Ton							
	Demolish	Ea.		535		535	Includes material and labor to install a refrigeration compressor.
	Install	Ea.	435	320		755	
	Demolish and Install	Ea.	435	855		1290	
	Reinstall	Ea.		256		256	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		320		320	

Rough Mechanical

Air Conditioning		Unit	Material	Labor	Equip.	Total	Specification
2.5 Ton							
	Demolish	Ea.		535		535	Includes material and labor to install a refrigeration compressor.
	Install	Ea.	510	345		855	
	Demolish and Install	Ea.	510	880		1390	
	Reinstall	Ea.		277.36		277.36	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		320		320	
3 Ton							
	Demolish	Ea.		535		535	Includes material and labor to install a refrigeration compressor.
	Install	Ea.	560	360		920	
	Demolish and Install	Ea.	560	895		1455	
	Reinstall	Ea.		289.43		289.43	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		320		320	
4 Ton							
	Demolish	Ea.		535		535	Includes material and labor to install a refrigeration compressor.
	Install	Ea.	715	291		1006	
	Demolish and Install	Ea.	715	826		1541	
	Reinstall	Ea.		232.73		232.73	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		320		320	
5 Ton							
	Demolish	Ea.		535		535	Includes material and labor to install a refrigeration compressor.
	Install	Ea.	785	395		1180	
	Demolish and Install	Ea.	785	930		1715	
	Reinstall	Ea.		317.03		317.03	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		320		320	
Condensing Unit							
2 Ton Air-cooled							
	Demolish	Ea.		152		152	Includes material and labor to install a 2 ton condensing unit.
	Install	Ea.	1675	550		2225	
	Demolish and Install	Ea.	1675	702		2377	
	Reinstall	Ea.		438.74		438.74	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		320		320	
2.5 Ton Air-cooled							
	Demolish	Ea.		178		178	Includes material and labor to install a 2.5 ton condensing unit.
	Install	Ea.	1825	675		2500	
	Demolish and Install	Ea.	1825	853		2678	
	Reinstall	Ea.		541.97		541.97	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		320		320	
3 Ton Air-cooled							
	Demolish	Ea.		213		213	Includes material and labor to install a 3 ton condensing unit.
	Install	Ea.	2025	885		2910	
	Demolish and Install	Ea.	2025	1098		3123	
	Reinstall	Ea.		708.73		708.73	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		320		320	
4 Ton Air-cooled							
	Demolish	Ea.		320		320	Includes material and labor to install a 4 ton condensing unit.
	Install	Ea.	2500	1275		3775	
	Demolish and Install	Ea.	2500	1595		4095	
	Reinstall	Ea.		1023.72		1023.72	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		320		320	

Rough Mechanical

Air Conditioning		Unit	Material	Labor	Equip.	Total	Specification
5 Ton Air-cooled							
	Demolish	Ea.		480		480	Includes material and labor to install a 5 ton condensing unit.
	Install	Ea.	2900	1925		4825	
	Demolish and Install	Ea.	2900	2405		5305	
	Reinstall	Ea.		1535.57		1535.57	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		320		320	
Air Handler							
1,200 CFM							
	Demolish	Ea.		385		385	Includes material and labor to install a 1200 CFM capacity air handling unit.
	Install	Ea.	6275	885		7160	
	Demolish and Install	Ea.	6275	1270		7545	
	Reinstall	Ea.		708.73		708.73	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		320		320	
2,000 CFM							
	Demolish	Ea.		385		385	Includes material and labor to install a 2000 CFM capacity air handling unit.
	Install	Ea.	13200	1050		14250	
	Demolish and Install	Ea.	13200	1435		14635	
	Reinstall	Ea.		837.59		837.59	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		320		320	
3,000 CFM							
	Demolish	Ea.		425		425	Includes material and labor to install a 3000 CFM capacity air handling unit.
	Install	Ea.	13800	1150		14950	
	Demolish and Install	Ea.	13800	1575		15375	
	Reinstall	Ea.		921.34		921.34	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		320		320	
Evaporative Cooler							
4,300 CFM, 1/3 HP							
	Demolish	Ea.		149		149	Includes material and labor to install an evaporative cooler.
	Install	Ea.	1375	330		1705	
	Demolish and Install	Ea.	1375	479		1854	
	Reinstall	Ea.		265.40		265.40	
	Clean	Ea.	1.31	50.50		51.81	
	Minimum Charge	Job		320		320	
4,700 CFM, 1/2 HP							
	Demolish	Ea.		149		149	Includes material and labor to install an evaporative cooler.
	Install	Ea.	1325	340		1665	
	Demolish and Install	Ea.	1325	489		1814	
	Reinstall	Ea.		273.96		273.96	
	Clean	Ea.	1.31	50.50		51.81	
	Minimum Charge	Job		320		320	
5,600 CFM, 3/4 HP							
	Demolish	Ea.		149		149	Includes material and labor to install an evaporative cooler.
	Install	Ea.	3000	355		3355	
	Demolish and Install	Ea.	3000	504		3504	
	Reinstall	Ea.		283.09		283.09	
	Clean	Ea.	1.31	50.50		51.81	
	Minimum Charge	Job		320		320	
Master Cool Brand							
	Demolish	Ea.		149		149	Includes material and labor to install an evaporative cooler.
	Install	Ea.	1350	365		1715	
	Demolish and Install	Ea.	1350	514		1864	
	Reinstall	Ea.		292.86		292.86	
	Clean	Ea.	1.31	50.50		51.81	
	Minimum Charge	Job		320		320	



Rough Mechanical

Air Conditioning		Unit	Material	Labor	Equip.	Total	Specification
Motor							
	Demolish	Ea.		83.50		83.50	Includes material and labor to install an evaporative cooler motor.
	Install	Ea.	325	258		583	
	Demolish and Install	Ea.	325	341.50		666.50	
	Reinstall	Ea.		206.33		206.33	
	Clean	Ea.	1.31	50.50		51.81	
	Minimum Charge	Job		320		320	
Water Pump							
	Demolish	Ea.		83.50		83.50	Includes material and labor to install an evaporative cooler water pump.
	Install	Ea.	84	147		231	
	Demolish and Install	Ea.	84	230.50		314.50	
	Reinstall	Ea.		117.92		117.92	
	Clean	Ea.	1.31	50.50		51.81	
	Minimum Charge	Job		320		320	
Fan Belt							
	Demolish	Ea.		16.75		16.75	Includes material and labor to install an evaporative cooler fan belt.
	Install	Ea.	60.50	29.50		90	
	Demolish and Install	Ea.	60.50	46.25		106.75	
	Reinstall	Ea.		23.58		23.58	
	Minimum Charge	Job		320		320	
Pads (4 ea.)							
	Demolish	Ea.		16.75		16.75	Includes material and labor to install pre-fabricated roof pads for an evaporative cooler.
	Install	Ea.	40	73.50		113.50	
	Demolish and Install	Ea.	40	90.25		130.25	
	Reinstall	Ea.		58.96		58.96	
	Clean	Ea.	1.31	50.50		51.81	
	Minimum Charge	Job		320		320	
Service call							
	Install	Job		295		295	Includes 4 hour minimum labor charge for a sheetmetal worker.
Window Mounted							
Low Output BTU							
	Install	Ea.	390	67		457	Includes material and labor to install a window air conditioning unit.
	Reinstall	Ea.		53.76		53.76	
	Clean	Ea.	.50	12.65		13.15	
	Minimum Charge	Job		320		320	
Mid-range Output BTU							
	Demolish	Ea.		47		47	Includes material and labor to install a window air conditioning unit.
	Install	Ea.	470	89.50		559.50	
	Demolish and Install	Ea.	470	136.50		606.50	
	Reinstall	Ea.		71.68		71.68	
	Clean	Ea.	.50	12.65		13.15	
	Minimum Charge	Job		320		320	
High Output BTU							
	Demolish	Ea.		59.50		59.50	Includes material and labor to install a window air conditioning unit.
	Install	Ea.	525	89.50		614.50	
	Demolish and Install	Ea.	525	149		674	
	Reinstall	Ea.		71.68		71.68	
	Clean	Ea.	.50	12.65		13.15	
	Minimum Charge	Job		320		320	
Hotel-type Hot / Cold							
	Demolish	Ea.		91.50		91.50	Includes material and labor to install packaged air conditioning unit, 15000 BTU cooling, 13900 BTU heating.
	Install	Ea.	4575	385		4960	
	Demolish and Install	Ea.	4575	476.50		5051.50	
	Reinstall	Ea.		307.11		307.11	
	Clean	Ea.	.65	25.50		26.15	
	Minimum Charge	Job		320		320	

Rough Mechanical

Air Conditioning		Unit	Material	Labor	Equip.	Total	Specification
Thermostat							
	Demolish	Ea.		17.80		17.80	Includes material and labor to install an electric thermostat, 2 set back.
	Install	Ea.	195	80		275	
	Demolish and Install	Ea.	195	97.80		292.80	
	Reinstall	Ea.		64		64	
	Clean	Ea.	.07	12.65		12.72	
	Minimum Charge	Job		320		320	
Concrete Pad							
	Demolish	S.F.		2.81		2.81	Includes material and labor to install air conditioner pad.
	Install	S.F.	4.50	6.65		11.15	
	Demolish and Install	S.F.	4.50	9.46		13.96	
	Reinstall	S.F.		5.32		5.32	
	Clean	S.F.	.07	.81		.88	
	Paint	S.F.	.50	.45		.95	
	Minimum Charge	Job		320		320	
A/C Junction Box							
	Install	Ea.	238	184		422	Includes labor and materials to install an air conditioning circuit including up to 40 feet of non-metallic cable.
	Minimum Charge	Job		325		325	

Sprinkler System		Unit	Material	Labor	Equip.	Total	Specification
Exposed							
Wet Type							
	Demolish	SF Flr.		.27		.27	Includes material and labor to install an exposed wet pipe fire sprinkler system.
	Install	SF Flr.	3.92	2.73		6.65	
	Demolish and Install	SF Flr.	3.92	3		6.92	
	Reinstall	SF Flr.		2.73		2.73	
	Minimum Charge	Job		300		300	
Dry Type							
	Demolish	SF Flr.		.27		.27	Includes material and labor to install an exposed dry pipe fire sprinkler system.
	Install	SF Flr.	4.50	2.73		7.23	
	Demolish and Install	SF Flr.	4.50	3		7.50	
	Reinstall	SF Flr.		2.73		2.73	
	Minimum Charge	Job		300		300	
Concealed							
Wet Type							
	Demolish	SF Flr.		.54		.54	Includes material and labor to install a concealed wet pipe fire sprinkler system.
	Install	SF Flr.	3.92	3.72		7.64	
	Demolish and Install	SF Flr.	3.92	4.26		8.18	
	Reinstall	SF Flr.		3.72		3.72	
	Minimum Charge	Job		300		300	
Dry Type							
	Demolish	SF Flr.		.54		.54	Includes material and labor to install a concealed dry pipe fire sprinkler system.
	Install	SF Flr.	4.50	3.72		8.22	
	Demolish and Install	SF Flr.	4.50	4.26		8.76	
	Reinstall	SF Flr.		3.72		3.72	
	Minimum Charge	Job		300		300	



Junction Boxes

Cable


Switch Box

Electrical Per S.F.	Unit	Material	Labor	Equip.	Total	Specification
Residential						
Wiring, Lighting and Fixtures						
Install	S.F.	2.07	2.69		4.76	Includes labor and material to replace house wiring, lighting fixtures, and built-in appliances. Apply S.F. cost to floor area including garages but not basements.
Minimum Charge	Job		325		325	
Wiring Only						
Install	S.F.	.28	1.06		1.34	Includes labor and material to replace house wiring only. Apply S.F. cost to floor area including garages but not basements.

Main Service	Unit	Material	Labor	Equip.	Total	Specification
Complete Panel						
100 Amp.						
Demolish	Ea.		266		266	Cost includes material and labor to install 100 Amp. residential service panel including 12 breaker interior panel, 10 single pole breakers and hook-up. Wiring is not included.
Install	Ea.	660	540		1200	
Demolish and Install	Ea.	660	806		1466	
Reinstall	Ea.		433.75		433.75	
Clean	Ea.	.33	101		101.33	
Minimum Charge	Job		325		325	
150 Amp.						
Demolish	Ea.		266		266	Cost includes material and labor to install 150 Amp. residential service, incl. 20 breaker exterior panel, main switch, 1 GFI and 14 single pole breakers, meter socket including hookup. Wiring is not included.
Install	Ea.	1025	625		1650	
Demolish and Install	Ea.	1025	891		1916	
Reinstall	Ea.		501.13		501.13	
Clean	Ea.	.33	101		101.33	
Minimum Charge	Job		325		325	
200 Amp.						
Demolish	Ea.		266		266	Cost includes material and labor to install 200 Amp. residential service, incl. 20 breaker exterior panel, main switch, 1 GFI and 18 single pole breakers, meter socket including hookup. Wiring is not included.
Install	Ea.	1750	715		2465	
Demolish and Install	Ea.	1750	981		2731	
Reinstall	Ea.		573.51		573.51	
Clean	Ea.	.33	101		101.33	
Minimum Charge	Job		325		325	

Rough Electrical

Main Service	Unit	Material	Labor	Equip.	Total	Specification
Masthead						
Demolish	Ea.		45		45	Includes material and labor to install galvanized steel conduit including masthead.
Install	Ea.	109	269		378	
Demolish and Install	Ea.	109	314		423	
Reinstall	Ea.		215.07		215.07	
Minimum Charge	Job		325		325	
Allowance to Repair						
Install	Job		325		325	Minimum labor charge for residential wiring.
Minimum Charge	Job		325		325	



Wall Insulation

Floor Insulation		Unit	Material	Labor	Equip.	Total	Specification
Kraft Faced Batt							
3-1/2" (R-13)							
	Demolish	S.F.		.19		.19	Cost includes material and labor to install 3-1/2" (R-13) kraft paper or foil faced roll and batt fiberglass insulation, joists 16" O.C.
	Install	S.F.	1.12	.77		1.89	
	Demolish and Install	S.F.	1.12	.96		2.08	
	Minimum Charge	Job		269		269	
6" (R-19)							
	Demolish	S.F.		.19		.19	Cost includes material and labor to install 6" (R-19) kraft paper or foil faced roll and batt fiberglass insulation, joists 16" O.C.
	Install	S.F.	1.32	.90		2.22	
	Demolish and Install	S.F.	1.32	1.09		2.41	
	Minimum Charge	Job		269		269	
10" (R-30)							
	Demolish	S.F.		.19		.19	Cost includes material and labor to install 10" (R-30) kraft paper-faced roll and batt fiberglass insulation, joists 16" O.C.
	Install	S.F.	1.78	1.08		2.86	
	Demolish and Install	S.F.	1.78	1.27		3.05	
	Minimum Charge	Job		269		269	
12" (R-38)							
	Demolish	S.F.		.19		.19	Cost includes material and labor to install 12" (R-38) kraft paper-faced roll and batt fiberglass insulation, joists 16" O.C.
	Install	S.F.	1.96	1.13		3.09	
	Demolish and Install	S.F.	1.96	1.32		3.28	
	Minimum Charge	Job		269		269	
Foil Faced Batt							
3-1/2" (R-13)							
	Demolish	S.F.		.19		.19	Cost includes material and labor to install 3-1/2" (R-13) kraft paper or foil faced roll and batt fiberglass insulation, joists 16" O.C.
	Install	S.F.	1.12	.77		1.89	
	Demolish and Install	S.F.	1.12	.96		2.08	
	Minimum Charge	Job		269		269	
6" (R-19)							
	Demolish	S.F.		.19		.19	Cost includes material and labor to install 6" (R-19) kraft paper or foil faced roll and batt fiberglass insulation, joists 16" O.C.
	Install	S.F.	1.32	.90		2.22	
	Demolish and Install	S.F.	1.32	1.09		2.41	
	Minimum Charge	Job		269		269	
Unfaced Batt							
3-1/2" (R-13)							
	Demolish	S.F.		.19		.19	Cost includes material and labor to install 3-1/2" (R-13) unfaced roll and batt fiberglass insulation, joists 16" O.C.
	Install	S.F.	.85	.90		1.75	
	Demolish and Install	S.F.	.85	1.09		1.94	
	Minimum Charge	Job		269		269	

Insulation

Floor Insulation		Unit	Material	Labor	Equip.	Total	Specification
6" (R-19)							
	Demolish	S.F.		.19		.19	Cost includes material and labor to install 6" (R-19) unfaced roll and batt fiberglass insulation, joists 16" O.C.
	Install	S.F.	1.02	1.08		2.10	
	Demolish and Install	S.F.	1.02	1.27		2.29	
	Minimum Charge	Job		269		269	
10" (R-30)							
	Demolish	S.F.		.19		.19	Cost includes material and labor to install 10" (R-30) unfaced roll and batt fiberglass insulation, joists 16" O.C.
	Install	S.F.	1.86	1.19		3.05	
	Demolish and Install	S.F.	1.86	1.38		3.24	
	Minimum Charge	Job		269		269	
12" (R-38)							
	Demolish	S.F.		.19		.19	Cost includes material and labor to install 12" (R-38) unfaced roll and batt fiberglass insulation, joists 16" O.C.
	Install	S.F.	2.13	1.26		3.39	
	Demolish and Install	S.F.	2.13	1.45		3.58	
	Minimum Charge	Job		269		269	
Rigid Board							
1/2"							
	Demolish	S.F.		.19		.19	Includes material and labor to install rigid foam insulation board foil faced two sides.
	Install	S.F.	.59	.67		1.26	
	Demolish and Install	S.F.	.59	.86		1.45	
	Minimum Charge	Job		269		269	
3/4"							
	Demolish	S.F.		.19		.19	Includes material and labor to install rigid foam insulation board foil faced two sides.
	Install	S.F.	.70	.67		1.37	
	Demolish and Install	S.F.	.70	.86		1.56	
	Minimum Charge	Job		269		269	
1-1/2"							
	Demolish	S.F.		.19		.19	Includes material and labor to install rigid foam insulation board foil faced two sides.
	Install	S.F.	1.61	.72		2.33	
	Demolish and Install	S.F.	1.61	.91		2.52	
	Minimum Charge	Job		269		269	
Support Wire							
	Demolish	S.F.		.07		.07	Includes material and labor to install friction fit support wire.
	Install	S.F.	.06	.15		.21	
	Demolish and Install	S.F.	.06	.22		.28	
	Minimum Charge	Job		269		269	
Vapor Barrier							
	Demolish	S.F.		.10		.10	Cost includes material and labor to install 4 mil polyethylene vapor barrier 10' wide sheets with 6" overlaps.
	Install	S.F.	.08	.15		.23	
	Demolish and Install	S.F.	.08	.25		.33	
	Minimum Charge	Job		269		269	

Wall Insulation		Unit	Material	Labor	Equip.	Total	Specification
Kraft Faced Batt							
3-1/2" (R-13)							
	Demolish	S.F.		.18		.18	Cost includes material and labor to install 3-1/2" (R-13) kraft paper-faced roll and batt fiberglass insulation, joist or studs 16" O.C.
	Install	S.F.	.91	.40		1.31	
	Demolish and Install	S.F.	.91	.58		1.49	
	Minimum Charge	Job		269		269	
6" (R-19)							
	Demolish	S.F.		.18		.18	Cost includes material and labor to install 6" (R-19) kraft paper-faced roll and batt fiberglass insulation, joist or studs 16" O.C.
	Install	S.F.	1.11	.40		1.51	
	Demolish and Install	S.F.	1.11	.58		1.69	
	Minimum Charge	Job		269		269	

Insulation

Wall Insulation		Unit	Material	Labor	Equip.	Total	Specification
10" (R-30)							
	Demolish	S.F.		.18		.18	Cost includes material and labor to install 10" (R-30) kraft paper-faced roll and batt fiberglass insulation, joist or studs 16" O.C.
	Install	S.F.	1.78	.47		2.25	
	Demolish and Install	S.F.	1.78	.65		2.43	
	Minimum Charge	Job		269		269	
12" (R-38)							
	Demolish	S.F.		.18		.18	Cost includes material and labor to install 12" (R-38) kraft paper-faced roll and batt fiberglass insulation, joist or studs 16" O.C.
	Install	S.F.	1.96	.47		2.43	
	Demolish and Install	S.F.	1.96	.65		2.61	
	Minimum Charge	Job		269		269	
Foil Faced Batt							
3-1/2" (R-13)							
	Demolish	S.F.		.18		.18	Cost includes material and labor to install 3-1/2" (R-13) foil faced roll and batt fiberglass insulation, joist or studs 16" O.C.
	Install	S.F.	.92	.40		1.32	
	Demolish and Install	S.F.	.92	.58		1.50	
	Minimum Charge	Job		269		269	
6" (R-19)							
	Demolish	S.F.		.18		.18	Cost includes material and labor to install 6" (R-19) foil faced roll and batt fiberglass insulation, joist or studs 16" O.C.
	Install	S.F.	1.29	.40		1.69	
	Demolish and Install	S.F.	1.29	.58		1.87	
	Minimum Charge	Job		269		269	
Unfaced Batt							
3-1/2" (R-13)							
	Demolish	S.F.		.18		.18	Cost includes material and labor to install 3-1/2" (R-13) unfaced roll and batt fiberglass insulation, joist or studs 16" O.C.
	Install	S.F.	.85	.40		1.25	
	Demolish and Install	S.F.	.85	.58		1.43	
	Minimum Charge	Job		269		269	
6" (R-19)							
	Demolish	S.F.		.18		.18	Cost includes material and labor to install 6" (R-19) unfaced roll and batt fiberglass insulation, joist or studs 16" O.C.
	Install	S.F.	1.02	.47		1.49	
	Demolish and Install	S.F.	1.02	.65		1.67	
	Minimum Charge	Job		269		269	
10" (R-30)							
	Demolish	S.F.		.18		.18	Cost includes material and labor to install 10" (R-30) unfaced roll and batt fiberglass insulation, joist or studs 16" O.C.
	Install	S.F.	1.86	.47		2.33	
	Demolish and Install	S.F.	1.86	.65		2.51	
	Minimum Charge	Job		269		269	
12" (R-38)							
	Demolish	S.F.		.18		.18	Cost includes material and labor to install 12" (R-38) unfaced roll and batt fiberglass insulation, joist or studs 16" O.C.
	Install	S.F.	2.13	.54		2.67	
	Demolish and Install	S.F.	2.13	.72		2.85	
	Minimum Charge	Job		269		269	
Blown							
R-13							
	Demolish	S.F.		.18		.18	Includes material and labor to install fiberglass blown-in insulation in wall with wood siding.
	Install	S.F.	.52	1.80	1.04	3.36	
	Demolish and Install	S.F.	.52	1.98	1.04	3.54	
	Minimum Charge	Job		620	360	980	
R-19							
	Demolish	S.F.		.18		.18	Includes material and labor to install fiberglass blown-in insulation in wall with wood siding.
	Install	S.F.	.78	2.07	1.20	4.05	
	Demolish and Install	S.F.	.78	2.25	1.20	4.23	
	Minimum Charge	Job		620	360	980	

Insulation

Wall Insulation		Unit	Material	Labor	Equip.	Total	Specification
Rigid Board							
1/2"							
	Demolish	S.F.		.22		.22	Includes material and labor to install rigid foam insulation board, foil faced, two sides.
	Install	S.F.	.59	.67		1.26	
	Demolish and Install	S.F.	.59	.89		1.48	
	Minimum Charge	Job		269		269	
3/4"							
	Demolish	S.F.		.22		.22	Includes material and labor to install rigid foam insulation board, foil faced, two sides.
	Install	S.F.	.70	.67		1.37	
	Demolish and Install	S.F.	.70	.89		1.59	
	Minimum Charge	Job		269		269	
1-1/2"							
	Demolish	S.F.		.22		.22	Includes material and labor to install rigid foam insulation board, foil faced, two sides.
	Install	S.F.	1.61	.74		2.35	
	Demolish and Install	S.F.	1.61	.96		2.57	
	Minimum Charge	Job		269		269	
Vapor Barrier							
	Demolish	S.F.		.06		.06	Cost includes material and labor to install 4 mil polyethylene vapor barrier 10' wide sheets with 6" overlaps.
	Install	S.F.	.08	.15		.23	
	Demolish and Install	S.F.	.08	.21		.29	
	Minimum Charge	Job		269		269	

Ceiling Insulation		Unit	Material	Labor	Equip.	Total	Specification
Kraft Faced Batt							
3-1/2" (R-13)							
	Demolish	S.F.		.19		.19	Cost includes material and labor to install 3-1/2" (R-13) kraft paper-faced roll and batt fiberglass insulation, joist or studs 16" O.C.
	Install	S.F.	.91	.40		1.31	
	Demolish and Install	S.F.	.91	.59		1.50	
	Minimum Charge	Job		269		269	
6" (R-19)							
	Demolish	S.F.		.19		.19	Cost includes material and labor to install 6" (R-19) kraft paper-faced roll and batt fiberglass insulation, joist or studs 16" O.C.
	Install	S.F.	1.11	.40		1.51	
	Demolish and Install	S.F.	1.11	.59		1.70	
	Minimum Charge	Job		269		269	
10" (R-30)							
	Demolish	S.F.		.19		.19	Cost includes material and labor to install 10" (R-30) kraft paper-faced roll and batt fiberglass insulation, joist or studs 16" O.C.
	Install	S.F.	1.78	.47		2.25	
	Demolish and Install	S.F.	1.78	.66		2.44	
	Minimum Charge	Job		269		269	
12" (R-38)							
	Demolish	S.F.		.19		.19	Cost includes material and labor to install 12" (R-38) kraft paper-faced roll and batt fiberglass insulation, joist or studs 16" O.C.
	Install	S.F.	1.96	.47		2.43	
	Demolish and Install	S.F.	1.96	.66		2.62	
	Minimum Charge	Job		269		269	
Foil Faced Batt							
3-1/2" (R-13)							
	Demolish	S.F.		.19		.19	Cost includes material and labor to install 3-1/2" (R-13) foil faced roll and batt fiberglass insulation, joist or studs 16" O.C.
	Install	S.F.	.92	.40		1.32	
	Demolish and Install	S.F.	.92	.59		1.51	
	Minimum Charge	Job		269		269	

Insulation

Ceiling Insulation		Unit	Material	Labor	Equip.	Total	Specification
6" (R-19)							
	Demolish	S.F.		.19		.19	Cost includes material and labor to install 6" (R-19) foil faced roll and batt fiberglass insulation, joist or studs 16" O.C.
	Install	S.F.	1.29	.40		1.69	
	Demolish and Install	S.F.	1.29	.59		1.88	
	Minimum Charge	Job		269		269	
Unfaced Batt							
3-1/2" (R-13)							
	Demolish	S.F.		.19		.19	Cost includes material and labor to install 3-1/2" (R-13) unfaced roll and batt fiberglass insulation, joist or studs 16" O.C.
	Install	S.F.	.85	.40		1.25	
	Demolish and Install	S.F.	.85	.59		1.44	
	Minimum Charge	Job		269		269	
6" (R-19)							
	Demolish	S.F.		.19		.19	Cost includes material and labor to install 6" (R-19) unfaced roll and batt fiberglass insulation, joist or studs 16" O.C.
	Install	S.F.	1.02	.47		1.49	
	Demolish and Install	S.F.	1.02	.66		1.68	
	Minimum Charge	Job		269		269	
10" (R-30)							
	Demolish	S.F.		.19		.19	Cost includes material and labor to install 10" (R-30) unfaced roll and batt fiberglass insulation, joist or studs 16" O.C.
	Install	S.F.	1.86	.47		2.33	
	Demolish and Install	S.F.	1.86	.66		2.52	
	Minimum Charge	Job		269		269	
12" (R-38)							
	Demolish	S.F.		.19		.19	Cost includes material and labor to install 12" (R-38) unfaced roll and batt fiberglass insulation, joist or studs 16" O.C.
	Install	S.F.	2.13	.54		2.67	
	Demolish and Install	S.F.	2.13	.73		2.86	
	Minimum Charge	Job		269		269	
Blown							
5"							
	Demolish	S.F.		.56		.56	Includes material and labor to install fiberglass blown-in insulation.
	Install	S.F.	.35	.33	.19	.87	
	Demolish and Install	S.F.	.35	.89	.19	1.43	
	Minimum Charge	Job		620	360	980	
6"							
	Demolish	S.F.		.56		.56	Includes material and labor to install fiberglass blown-in insulation.
	Install	S.F.	.50	.41	.24	1.15	
	Demolish and Install	S.F.	.50	.97	.24	1.71	
	Minimum Charge	Job		620	360	980	
9"							
	Demolish	S.F.		.56		.56	Includes material and labor to install fiberglass blown-in insulation.
	Install	S.F.	.62	.56	.33	1.51	
	Demolish and Install	S.F.	.62	1.12	.33	2.07	
	Minimum Charge	Job		620	360	980	
12"							
	Demolish	S.F.		.56		.56	Includes material and labor to install fiberglass blown-in insulation.
	Install	S.F.	.85	.83	.48	2.16	
	Demolish and Install	S.F.	.85	1.39	.48	2.72	
	Minimum Charge	Job		620	360	980	
Rigid Board							
1/2"							
	Demolish	S.F.		.31		.31	Includes material and labor to install rigid foam insulation board, foil faced, two sides.
	Install	S.F.	.59	.67		1.26	
	Demolish and Install	S.F.	.59	.98		1.57	
	Minimum Charge	Job		269		269	

Insulation

Ceiling Insulation		Unit	Material	Labor	Equip.	Total	Specification
3/4"							
	Demolish	S.F.		.31		.31	Includes material and labor to install rigid foam insulation board, foil faced, two sides.
	Install	S.F.	.70	.67		1.37	
	Demolish and Install	S.F.	.70	.98		1.68	
	Minimum Charge	Job		269		269	
1-1/2"							
	Demolish	S.F.		.31		.31	Includes material and labor to install rigid foam insulation board, foil faced, two sides.
	Install	S.F.	1.61	.74		2.35	
	Demolish and Install	S.F.	1.61	1.05		2.66	
	Minimum Charge	Job		269		269	

Exterior Insulation		Unit	Material	Labor	Equip.	Total	Specification
Rigid Board							
1/2"							
	Demolish	S.F.		.17		.17	Includes material and labor to install rigid foam insulation board foil faced two sides.
	Install	S.F.	.59	.67		1.26	
	Demolish and Install	S.F.	.59	.84		1.43	
	Minimum Charge	Job		269		269	
3/4"							
	Demolish	S.F.		.17		.17	Includes material and labor to install rigid foam insulation board foil faced two sides.
	Install	S.F.	.70	.67		1.37	
	Demolish and Install	S.F.	.70	.84		1.54	
	Minimum Charge	Job		269		269	
1-1/2"							
	Demolish	S.F.		.17		.17	Includes material and labor to install rigid foam insulation board foil faced two sides.
	Install	S.F.	1.61	.72		2.33	
	Demolish and Install	S.F.	1.61	.89		2.50	
	Minimum Charge	Job		269		269	
Vapor Barrier							
	Demolish	S.F.		.10		.10	Cost includes material and labor to install 4 mil polyethylene vapor barrier 10' wide sheets with 6" overlaps.
	Install	S.F.	.08	.15		.23	
	Demolish and Install	S.F.	.08	.25		.33	
	Minimum Charge	Job		269		269	

Roof Insulation Board		Unit	Material	Labor	Equip.	Total	Specification
Fiberglass							
3/4" Fiberglass							
	Demolish	Sq.		58.50		58.50	Includes material and labor to install fiberglass board insulation 3/4" thick, R-2.80 and C-0.36 values.
	Install	Sq.	38.50	30.50		69	
	Demolish and Install	Sq.	38.50	89		127.50	
	Minimum Charge	Job		269		269	
1" Fiberglass							
	Demolish	Sq.		58.50		58.50	Includes material and labor to install fiberglass board insulation 1" thick, R-4.20 and C-0.24 values.
	Install	Sq.	129	34.50		163.50	
	Demolish and Install	Sq.	129	93		222	
	Minimum Charge	Job		269		269	
1-3/8" Fiberglass							
	Demolish	Sq.		58.50		58.50	Includes material and labor to install fiberglass board insulation 1-3/8" thick, R-5.30 and C-0.19 values.
	Install	Sq.	585	37.50		622.50	
	Demolish and Install	Sq.	585	96		681	
	Minimum Charge	Job		269		269	




Insulation

Roof Insulation Board		Unit	Material	Labor	Equip.	Total	Specification
1-5/8" Fiberglass							
	Demolish	Sq.		58.50		58.50	Includes material and labor to install fiberglass board insulation 1-5/8" thick, R-6.70 and C-0.15 values.
	Install	Sq.	210	39.50		249.50	
	Demolish and Install	Sq.	210	98		308	
	Minimum Charge	Job		269		269	
2-1/4" Fiberglass							
	Demolish	Sq.		58.50		58.50	Includes material and labor to install fiberglass board insulation 2-1/4" thick, R-8.30 and C-0.12 values.
	Install	Sq.	405	43.50		448.50	
	Demolish and Install	Sq.	405	102		507	
	Minimum Charge	Job		269		269	
Perlite							
1" Perlite							
	Demolish	Sq.		58.50		58.50	Includes material and labor to install perlite board insulation 1" thick, R-2.80 and C-0.36 values.
	Install	Sq.	113	34.50		147.50	
	Demolish and Install	Sq.	113	93		206	
	Minimum Charge	Job		269		269	
4" Perlite							
	Demolish	Sq.		58.50		58.50	Includes material and labor to install perlite board insulation 4" thick, R-10.0 and C-0.10 values.
	Install	Sq.	450	66		516	
	Demolish and Install	Sq.	450	124.50		574.50	
	Minimum Charge	Job		269		269	
1-1/2" Perlite							
	Demolish	Sq.		58.50		58.50	Includes material and labor to install perlite board insulation 1-1/2" thick, R-4.20 and C-0.24 values.
	Install	Sq.	161	37.50		198.50	
	Demolish and Install	Sq.	161	96		257	
	Minimum Charge	Job		269		269	
2" Perlite							
	Demolish	Sq.		58.50		58.50	Includes material and labor to install perlite board insulation 2" thick, R-5.30 and C-0.19 values.
	Install	Sq.	200	46		246	
	Demolish and Install	Sq.	200	104.50		304.50	
	Minimum Charge	Job		269		269	
2-1/2" Perlite							
	Demolish	Sq.		58.50		58.50	Includes material and labor to install perlite board insulation 2-1/2" thick, R-6.70 and C-0.15 values.
	Install	Sq.	695	51.50		746.50	
	Demolish and Install	Sq.	695	110		805	
	Minimum Charge	Job		269		269	
3" Perlite							
	Demolish	Sq.		58.50		58.50	Includes material and labor to install perlite board insulation 3" thick, R-8.30 and C-0.12 values.
	Install	Sq.	340	55		395	
	Demolish and Install	Sq.	340	113.50		453.50	
	Minimum Charge	Job		269		269	
Polystyrene							
2" Polystyrene							
	Demolish	Sq.		58.50		58.50	Includes material and labor to install extruded polystyrene board, R5.0/ 2" in thickness @25PSI compressive strength.
	Install	Sq.	79	43.50		122.50	
	Demolish and Install	Sq.	79	102		181	
	Minimum Charge	Job		269		269	
1" Polystyrene							
	Demolish	Sq.		58.50		58.50	Includes material and labor to install extruded polystyrene board, R5.0/ 1" in thickness @25PSI compressive strength.
	Install	Sq.	39.50	29.50		69	
	Demolish and Install	Sq.	39.50	88		127.50	
	Minimum Charge	Job		269		269	
1-1/2" Polystyrene							
	Demolish	Sq.		58.50		58.50	Includes material and labor to install extruded polystyrene board, R5.0/ 1-1/2" in thickness @25PSI compressive strength.
	Install	Sq.	59.50	34.50		94	
	Demolish and Install	Sq.	59.50	93		152.50	
	Minimum Charge	Job		269		269	

Insulation

Roof Insulation Board		Unit	Material	Labor	Equip.	Total	Specification
Urethane							
3/4" Urethane							
	Demolish	Sq.		58.50		58.50	Includes material and labor to install urethane board insulation 3/4" thick, R-5.30 and C-0.19 values.
	Install	Sq.	90	26		116	
	Demolish and Install	Sq.	90	84.50		174.50	
	Minimum Charge	Job		269		269	
1" Urethane							
	Demolish	Sq.		58.50		58.50	Includes material and labor to install urethane board insulation 1" thick, R-6.70 and C-0.15 values.
	Install	Sq.	153	27.50		180.50	
	Demolish and Install	Sq.	153	86		239	
	Minimum Charge	Job		269		269	
1-1/2" Urethane							
	Demolish	Sq.		58.50		58.50	Includes material and labor to install urethane board insulation 1-1/2" thick, R-10.1 and C-0.09 values.
	Install	Sq.	135	32		167	
	Demolish and Install	Sq.	135	90.50		225.50	
	Minimum Charge	Job		269		269	
2" Urethane							
	Demolish	Sq.		58.50		58.50	Includes material and labor to install urethane board insulation 2" thick, R-13.4 and C-0.06 values.
	Install	Sq.	164	37.50		201.50	
	Demolish and Install	Sq.	164	96		260	
	Minimum Charge	Job		269		269	

Walls / Ceilings



Gypsum Wallboard

Tile Ceiling

Gypsum Wallboard Ceiling

Wall Plaster		Unit	Material	Labor	Equip.	Total	Specification
Interior							
Cement							
	Demolish	S.Y.		7.50		7.50	Includes material and labor to install cement plaster on interior wood framing with metal lath.
	Install	S.Y.	26	33	1.83	60.83	
	Demolish and Install	S.Y.	26	40.50	1.83	68.33	
	Clean	S.Y.		3.68		3.68	
	Paint	S.Y.	2.17	5.90		8.07	
	Minimum Charge	Job		258		258	
Acoustic							
	Demolish	S.Y.		7.50		7.50	Includes material and labor to install acoustical cement plaster on interior wood framing with metal lath.
	Install	S.Y.	17.10	40.50	1.83	59.43	
	Demolish and Install	S.Y.	17.10	48	1.83	66.93	
	Clean	S.Y.		3.68		3.68	
	Paint	S.Y.	2.17	5.90		8.07	
	Minimum Charge	Job		258		258	
Gypsum							
	Demolish	S.Y.		7.50		7.50	Includes material and labor to install gypsum wall or ceiling plaster on interior wood framing with metal lath.
	Install	S.Y.	18.15	34.50	1.56	54.21	
	Demolish and Install	S.Y.	18.15	42	1.56	61.71	
	Clean	S.Y.		3.68		3.68	
	Paint	S.Y.	2.17	5.90		8.07	
	Minimum Charge	Job		258		258	
Stucco							
	Demolish	S.Y.		18		18	Includes material and labor to install stucco on wire mesh over wood framing.
	Install	S.Y.	14.05	47.50	2.15	63.70	
	Demolish and Install	S.Y.	14.05	65.50	2.15	81.70	
	Clean	S.Y.		3.68		3.68	
	Paint	S.Y.	2.17	5.90		8.07	
	Minimum Charge	Job		258		258	
Thin Coat							
Veneer							
	Demolish	S.Y.		7.50		7.50	Includes materials and labor to install thin coat veneer plaster.
	Install	S.Y.	1.25	6.15	.34	7.74	
	Demolish and Install	S.Y.	1.25	13.65	.34	15.24	
	Clean	S.Y.		3.68		3.68	
	Paint	S.Y.	2.17	5.90		8.07	
	Minimum Charge	Job		258		258	

Walls / Ceilings

Wall Plaster		Unit	Material	Labor	Equip.	Total	Specification
Lath							
Metal							
	Demolish	S.Y.		1.76		1.76	Includes material and labor to install wire lath on steel framed walls.
	Install	S.Y.	15.40	7.20		22.60	
	Demolish and Install	S.Y.	15.40	8.96		24.36	
	Clean	S.Y.		3.68		3.68	
	Minimum Charge	Job		127		127	
Gypsum							
	Demolish	S.Y.		1.76		1.76	Includes material and labor to install gypsum lath on walls.
	Install	S.Y.	8.20	6.75		14.95	
	Demolish and Install	S.Y.	8.20	8.51		16.71	
	Clean	S.Y.		3.68		3.68	
	Minimum Charge	Job		258		258	
Repairs							
Fill in Small Cracks							
	Install	L.F.	.09	4.13		4.22	Includes labor and material to fill in hairline cracks up to 1/8" with filler, sand and prep for paint.
	Minimum Charge	Job		258		258	
Repair up to 1" Stock							
	Install	L.F.	.36	5.15		5.51	Includes labor and material to fill in hairline cracks up to 1" with filler, sand and prep for paint.
	Minimum Charge	Job		258		258	
Patch Small Hole (2")							
	Install	Ea.	.09	5.45		5.54	Includes labor and material to patch up to a 2" diameter hole in plaster.
	Minimum Charge	Job		258		258	
Patch Large Hole							
	Install	Ea.	10.90	172		182.90	Includes labor and material to patch up to a 20" diameter hole in plaster.
	Minimum Charge	Job		258		258	
Patch Plaster Section							
	Install	Ea.	4.17	5.15		9.32	Includes labor and material to repair section of plaster wall, area less than 20 S.F.
	Minimum Charge	Job		258		258	
Repair Inside Corner							
	Install	L.F.	4.36	12.90		17.26	Includes material and labor to patch plaster corners.
	Minimum Charge	Job		258		258	

Ceiling Plaster		Unit	Material	Labor	Equip.	Total	Specification
Interior							
Cement							
	Demolish	S.Y.		7.50		7.50	Includes material and labor to install cement plaster on interior wood framing with metal lath.
	Install	S.Y.	26	33	1.83	60.83	
	Demolish and Install	S.Y.	26	40.50	1.83	68.33	
	Clean	S.Y.		3.86		3.86	
	Paint	S.Y.	2.17	5.90		8.07	
	Minimum Charge	Job		258		258	
Acoustic							
	Demolish	S.Y.		7.50		7.50	Includes material and labor to install acoustical cement plaster on interior wood framing with metal lath.
	Install	S.Y.	17.10	40.50	1.83	59.43	
	Demolish and Install	S.Y.	17.10	48	1.83	66.93	
	Clean	S.Y.		3.86		3.86	
	Paint	S.Y.	2.17	5.90		8.07	
	Minimum Charge	Job		258		258	

Walls / Ceilings

Ceiling Plaster		Unit	Material	Labor	Equip.	Total	Specification
Gypsum							
	Demolish	S.Y.		7.50		7.50	Includes material and labor to install gypsum wall or ceiling plaster on interior wood framing with metal lath.
	Install	S.Y.	18.15	34.50	1.56	54.21	
	Demolish and Install	S.Y.	18.15	42	1.56	61.71	
	Clean	S.Y.		3.86		3.86	
	Paint	S.Y.	2.17	5.90		8.07	
	Minimum Charge	Job		258		258	
Stucco							
	Demolish	S.Y.		18		18	Includes material and labor to install stucco on wire mesh over wood framing.
	Install	S.Y.	14.05	47.50	2.15	63.70	
	Demolish and Install	S.Y.	14.05	65.50	2.15	81.70	
	Clean	S.Y.		3.86		3.86	
	Paint	S.Y.	2.17	5.90		8.07	
	Minimum Charge	Job		258		258	
Thin Coat Veneer							
	Demolish	S.Y.		7.50		7.50	Includes materials and labor to install thin coat veneer plaster.
	Install	S.Y.	1.25	6.15	.34	7.74	
	Demolish and Install	S.Y.	1.25	13.65	.34	15.24	
	Clean	S.Y.		3.86		3.86	
	Paint	S.Y.	2.17	5.90		8.07	
	Minimum Charge	Job		258		258	
Lath							
Metal							
	Demolish	S.Y.		1.76		1.76	Includes material and labor to install wire lath on steel framed ceilings.
	Install	S.Y.	15.40	9		24.40	
	Demolish and Install	S.Y.	15.40	10.76		26.16	
	Minimum Charge	Job		258		258	
Gypsum							
	Demolish	S.Y.		1.76		1.76	Includes material and labor to install gypsum lath on ceilings.
	Install	S.Y.	8.20	5.65		13.85	
	Demolish and Install	S.Y.	8.20	7.41		15.61	
	Minimum Charge	Job		258		258	
Repairs							
Fill in Small Cracks							
	Install	S.F.	.09	.94		1.03	Includes labor and material to fill in hairline cracks up to 1/8" with filler, sand and prep for paint.
	Minimum Charge	Job		515		515	

Gypsum Wallboard		Unit	Material	Labor	Equip.	Total	Specification
Finished							
1/4"							
	Demolish	S.F.		.45		.45	Cost includes material and labor to install 1/4" drywall, including joint taping, premixed compound and screws.
	Install	S.F.	.60	1.66		2.26	
	Demolish and Install	S.F.	.60	2.11		2.71	
	Clean	S.F.		.37		.37	
	Paint	S.F.	.47	.39		.86	
	Minimum Charge	Job		269		269	
3/8"							
	Demolish	S.F.		.45		.45	Cost includes material and labor to install 3/8" drywall including joint tape, premixed compound and screws.
	Install	S.F.	.51	1.68		2.19	
	Demolish and Install	S.F.	.51	2.13		2.64	
	Clean	S.F.		.37		.37	
	Paint	S.F.	.47	.39		.86	
	Minimum Charge	Job		269		269	

Walls / Ceilings

Gypsum Wallboard		Unit	Material	Labor	Equip.	Total	Specification
1/2"							
	Demolish	S.F.		.45		.45	Cost includes material and labor to install 1/2" drywall including joint tape, premixed compound and screws.
	Install	S.F.	.73	1.70		2.43	
	Demolish and Install	S.F.	.73	2.15		2.88	
	Clean	S.F.		.37		.37	
	Paint	S.F.	.47	.39		.86	
	Minimum Charge	Job		269		269	
1/2" Water Resistant							
	Demolish	S.F.		.45		.45	Cost includes material and labor to install 1/2" WR drywall including joint tape, premixed compound and screws.
	Install	S.F.	.49	1.70		2.19	
	Demolish and Install	S.F.	.49	2.15		2.64	
	Clean	S.F.		.37		.37	
	Paint	S.F.	.47	.39		.86	
	Minimum Charge	Job		269		269	
1/2" Fire-rated							
	Demolish	S.F.		.45		.45	Cost includes material and labor to install 1/2" FR drywall including screws. Taping and finishing not included.
	Install	S.F.	.45	1.70		2.15	
	Demolish and Install	S.F.	.45	2.15		2.60	
	Clean	S.F.		.37		.37	
	Paint	S.F.	.47	.39		.86	
	Minimum Charge	Job		269		269	
5/8"							
	Demolish	S.F.		.45		.45	Cost includes material and labor to install 5/8" drywall including joint tape, premixed compound and screws.
	Install	S.F.	.58	1.64		2.22	
	Demolish and Install	S.F.	.58	2.09		2.67	
	Clean	S.F.		.37		.37	
	Paint	S.F.	.47	.39		.86	
	Minimum Charge	Job		269		269	
5/8" Fire-rated							
	Demolish	S.F.		.45		.45	Cost includes material and labor to install 5/8" FR drywall, including joint taping, premixed compound and screws.
	Install	S.F.	.48	1.93		2.41	
	Demolish and Install	S.F.	.48	2.38		2.86	
	Clean	S.F.		.37		.37	
	Paint	S.F.	.47	.39		.86	
	Minimum Charge	Job		269		269	
2-hour Fire-rated							
	Demolish	S.F.		1.12		1.12	Cost includes material and labor to install 2 layers of 5/8" type X drywall including joint taping, premixed compound and screws.
	Install	S.F.	1.32	3.83		5.15	
	Demolish and Install	S.F.	1.32	4.95		6.27	
	Clean	S.F.		.37		.37	
	Paint	S.F.	.47	.39		.86	
	Minimum Charge	Job		269		269	
Unfinished							
1/4"							
	Demolish	S.F.		.45		.45	Cost includes material and labor to install 1/4" drywall including screws. Taping and finishing not included.
	Install	S.F.	.55	.58		1.13	
	Demolish and Install	S.F.	.55	1.03		1.58	
	Clean	S.F.		.37		.37	
	Minimum Charge	Job		269		269	
3/8"							
	Demolish	S.F.		.45		.45	Cost includes material and labor to install 3/8" drywall including screws. Tape, finish or texture is not included.
	Install	S.F.	.46	.58		1.04	
	Demolish and Install	S.F.	.46	1.03		1.49	
	Clean	S.F.		.37		.37	
	Minimum Charge	Job		269		269	

Walls / Ceilings

Gypsum Wallboard		Unit	Material	Labor	Equip.	Total	Specification
1/2"							
	Demolish	S.F.		.45		.45	Cost includes material and labor to install 1/2" drywall including screws. Taping and finishing not included.
	Install	S.F.	.68	.58		1.26	
	Demolish and Install	S.F.	.68	1.03		1.71	
	Clean	S.F.		.37		.37	
	Minimum Charge	Job		269		269	
1/2" Water Resistant							
	Demolish	S.F.		.45		.45	Cost includes material and labor to install 1/2" WR drywall including screws. taping and finishing not included.
	Install	S.F.	.44	.58		1.02	
	Demolish and Install	S.F.	.44	1.03		1.47	
	Clean	S.F.		.37		.37	
	Minimum Charge	Job		269		269	
1/2" Fire-rated							
	Demolish	S.F.		.45		.45	Cost includes labor and material to install 1/2" FR drywall including screws. Tape, finish or texture is not included.
	Install	S.F.	.68	.39		1.07	
	Demolish and Install	S.F.	.68	.84		1.52	
	Clean	S.F.		.37		.37	
	Minimum Charge	Job		269		269	
5/8"							
	Demolish	S.F.		.45		.45	Cost includes material and labor to install 5/8" drywall including screws. Taping and finishing not included.
	Install	S.F.	.52	.66		1.18	
	Demolish and Install	S.F.	.52	1.11		1.63	
	Clean	S.F.		.37		.37	
	Minimum Charge	Job		269		269	
5/8" Fire-rated							
	Demolish	S.F.		.45		.45	Cost includes material and labor to install 5/8" FR drywall including screws. Taping and finishing not included.
	Install	S.F.	.43	.66		1.09	
	Demolish and Install	S.F.	.43	1.11		1.54	
	Clean	S.F.		.37		.37	
	Minimum Charge	Job		269		269	
2-hour Fire-rated							
	Demolish	S.F.		1.12		1.12	Cost includes material and labor to install 2 layers of 5/8" type X drywall including joint taping, premixed compound and screws.
	Install	S.F.	1.32	3.83		5.15	
	Demolish and Install	S.F.	1.32	4.95		6.27	
	Clean	S.F.		.37		.37	
	Minimum Charge	Job		269		269	
Accessories							
Tape & Finish							
	Install	S.F.	.07	.54		.61	Includes labor and material for taping, sanding and finish.
	Minimum Charge	Job		269		269	
Texture							
Sprayed							
	Install	S.F.	.07	.68		.75	Includes labor and material to install by spray, texture finish.
	Minimum Charge	Job		269		269	
Trowel							
	Install	S.F.	.59	1.17		1.76	Includes labor and material to apply hand troweled texture.
	Minimum Charge	Job		269		269	
Patch Hole in Gypsum Wallboard							
	Install	S.F.	1.10	73.50		74.60	Includes labor and material to patch a one square foot area of damaged drywall.
	Minimum Charge	Job		269		269	
Furring Strips							
	Demolish	S.F.		.11		.11	Cost includes material and labor to install 1" x 2" furring strips, 16" O.C. per S.F. of surface area to be covered.
	Install	S.F.	.21	1.19		1.40	
	Demolish and Install	S.F.	.21	1.30		1.51	
	Minimum Charge	Job		134		134	

Walls / Ceilings

Ceramic Wall Tile		Unit	Material	Labor	Equip.	Total	Specification
Thin Set							
2" x 2"							
	Demolish	S.F.		1.50		1.50	Cost includes material and labor to install 2" x 2" ceramic tile in organic adhesive including cutting and grout.
	Install	S.F.	3.63	8.70		12.33	
	Demolish and Install	S.F.	3.63	10.20		13.83	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		261		261	
4-1/4" x 4-1/4"							
	Demolish	S.F.		1.50		1.50	Cost includes material and labor to install 4-1/4" x 4-1/4" ceramic tile in organic adhesive including grout.
	Install	S.F.	4.60	4.88		9.48	
	Demolish and Install	S.F.	4.60	6.38		10.98	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		261		261	
6" x 6"							
	Demolish	S.F.		1.50		1.50	Cost includes material and labor to install 6" x 6" ceramic tile in organic adhesive including cutting and grout.
	Install	S.F.	3.86	5.30		9.16	
	Demolish and Install	S.F.	3.86	6.80		10.66	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		261		261	
8" x 8"							
	Demolish	S.F.		1.50		1.50	Cost includes material and labor to install 8" x 8" ceramic tile in organic adhesive including cutting and grout.
	Install	S.F.	9.25	5.45		14.70	
	Demolish and Install	S.F.	9.25	6.95		16.20	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		261		261	
Thick Set							
2" x 2"							
	Demolish	S.F.		1.80		1.80	Cost includes material and labor to install 2" x 2" ceramic tile in mortar bed including cutting and grout.
	Install	S.F.	11.35	10.45		21.80	
	Demolish and Install	S.F.	11.35	12.25		23.60	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		261		261	
4-1/4" x 4-1/4"							
	Demolish	S.F.		1.80		1.80	Cost includes material and labor to install 4-1/4" x 4-1/4" ceramic tile in mortar bed including cutting and grout.
	Install	S.F.	7.20	10.45		17.65	
	Demolish and Install	S.F.	7.20	12.25		19.45	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		261		261	
6" x 6"							
	Demolish	S.F.		1.80		1.80	Cost includes material and labor to install 6" x 6" ceramic tile in mortar bed including cutting and grout.
	Install	S.F.	3.32	9.50		12.82	
	Demolish and Install	S.F.	3.32	11.30		14.62	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		261		261	
8" x 8"							
	Demolish	S.F.		1.80		1.80	Cost includes material and labor to install 8" x 8" ceramic tile in mortar bed including cutting and grout.
	Install	S.F.	8.25	8.70		16.95	
	Demolish and Install	S.F.	8.25	10.50		18.75	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		261		261	
Re-grout							
	Install	S.F.	.23	5.20		5.43	Includes material and labor to regrout wall tiles.
	Minimum Charge	Job		261		261	

Walls / Ceilings

Wall Tile		Unit	Material	Labor	Equip.	Total	Specification
Mirror							
Custom Cut Wall							
	Demolish	S.F.		.86		.86	Includes material and labor to install distortion-free float glass mirror, 1/8" to 3/16" thick with cut and polished edges.
	Install	S.F.	3.69	5.35		9.04	
	Demolish and Install	S.F.	3.69	6.21		9.90	
	Clean	S.F.	.02	.24		.26	
	Minimum Charge	Job		261		261	
Beveled Wall							
	Demolish	S.F.		.86		.86	Includes material and labor to install distortion-free float glass mirror, 1/8" to 3/16" thick with beveled edges.
	Install	S.F.	37.50	9.50		47	
	Demolish and Install	S.F.	37.50	10.36		47.86	
	Clean	S.F.	.02	.24		.26	
	Minimum Charge	Job		261		261	
Smoked Wall							
	Demolish	S.F.		.86		.86	Includes material and labor to install distortion-free smoked float glass mirror, 1/8" to 3/16" thick with cut and polished edges.
	Install	S.F.	.19	9.50		9.69	
	Demolish and Install	S.F.	.19	10.36		10.55	
	Clean	S.F.	.02	.24		.26	
	Minimum Charge	Job		261		261	
Marble							
Good Grade							
	Demolish	S.F.		2.81		2.81	Cost includes material and labor to install 3/8" x 12" x 12" marble tile in mortar bed with grout.
	Install	S.F.	8.80	22.50		31.30	
	Demolish and Install	S.F.	8.80	25.31		34.11	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		261		261	
Better Grade							
	Demolish	S.F.		2.81		2.81	Cost includes material and labor to install 3/8" x 12" x 12" marble, in mortar bed with grout.
	Install	S.F.	13.50	22.50		36	
	Demolish and Install	S.F.	13.50	25.31		38.81	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		261		261	
Premium Grade							
	Demolish	S.F.		2.81		2.81	Cost includes material and labor to install 3/8" x 12" x 12" marble, in mortar bed with grout.
	Install	S.F.	22	22.50		44.50	
	Demolish and Install	S.F.	22	25.31		47.31	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		261		261	
Glass Block							
	Demolish	S.F.		2.25		2.25	Cost includes material and labor to install 3-7/8" thick, 6" x 6" smooth face glass block including mortar and cleaning.
	Install	S.F.	29.50	21.50		51	
	Demolish and Install	S.F.	29.50	23.75		53.25	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		490		490	
Cork							
	Demolish	S.F.		.35		.35	Cost includes material and labor to install 3/16" thick cork tile and installation.
	Install	S.F.	5.25	1.85		7.10	
	Demolish and Install	S.F.	5.25	2.20		7.45	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		222		222	
Re-grout							
	Install	S.F.	.23	5.20		5.43	Includes material and labor to regROUT wall tiles.
	Minimum Charge	Job		261		261	

Walls / Ceilings

Wall Paneling		Unit	Material	Labor	Equip.	Total	Specification
Plywood							
Good Grade							
	Demolish	S.F.		.45		.45	Cost includes material and labor to install 4' x 8' x 1/4" paneling, including nails and adhesive.
	Install	S.F.	1.63	2.15		3.78	
	Demolish and Install	S.F.	1.63	2.60		4.23	
	Clean	S.F.		.37		.37	
	Paint	S.F.	.55	.84		1.39	
	Minimum Charge	Job		269		269	
Better Grade							
	Demolish	S.F.		.45		.45	Cost includes material and labor to install 4' x 8' x 1/4" plywood wall panel, including nails and adhesive.
	Install	S.F.	1.58	2.56		4.14	
	Demolish and Install	S.F.	1.58	3.01		4.59	
	Clean	S.F.		.37		.37	
	Paint	S.F.	.55	.84		1.39	
	Minimum Charge	Job		269		269	
Premium Grade							
	Demolish	S.F.		.45		.45	Cost includes material and labor to install 4' x 8' x 1/4" plywood wall panel, including nails and adhesive.
	Install	S.F.	1.68	3.07		4.75	
	Demolish and Install	S.F.	1.68	3.52		5.20	
	Clean	S.F.		.37		.37	
	Paint	S.F.	.55	.84		1.39	
	Minimum Charge	Job		269		269	
Hardboard							
Embossed Paneling							
	Demolish	S.F.		.45		.45	Includes material and labor to install hardboard embossed paneling including adhesives.
	Install	S.F.	.68	2.15		2.83	
	Demolish and Install	S.F.	.68	2.60		3.28	
	Clean	S.F.		.37		.37	
	Minimum Charge	Job		269		269	
Plastic Molding							
	Demolish	L.F.		.45		.45	Includes material and labor to install plastic trim for paneling.
	Install	L.F.	2.75	1.34		4.09	
	Demolish and Install	L.F.	2.75	1.79		4.54	
	Clean	L.F.	.02	.24		.26	
	Minimum Charge	Job		269		269	
Hardboard							
Embossed Brick							
	Demolish	S.F.		.45		.45	Cost includes material and labor to install 4' x 8' non-ceramic mineral brick-like veneer wall panels including adhesive.
	Install	S.F.	.91	2.39		3.30	
	Demolish and Install	S.F.	.91	2.84		3.75	
	Clean	S.F.		.37		.37	
	Paint	S.F.	.25	.66		.91	
	Minimum Charge	Job		269		269	
Embossed Ceramic Tile							
	Demolish	S.F.		.45		.45	Includes material and labor to install hardboard embossed paneling including adhesives.
	Install	S.F.	.68	2.15		2.83	
	Demolish and Install	S.F.	.68	2.60		3.28	
	Clean	S.F.		.37		.37	
	Paint	S.F.	.25	.66		.91	
	Minimum Charge	Job		269		269	
Pegboard							
	Demolish	S.F.		.45		.45	Cost includes material and labor to install 4' x 8' x 1/4" pegboard panel, including adhesive.
	Install	S.F.	.86	2.15		3.01	
	Demolish and Install	S.F.	.86	2.60		3.46	
	Clean	S.F.		.37		.37	
	Paint	S.F.	.25	.66		.91	
	Minimum Charge	Job		269		269	

Walls / Ceilings

Wall Paneling		Unit	Material	Labor	Equip.	Total	Specification
Furring Strips							
	Demolish	S.F.		.11		.11	Cost includes material and labor to install 1" x 2" furring strips, 16" O.C. per S.F. of surface area to be covered.
	Install	S.F.	.21	1.19		1.40	
	Demolish and Install	S.F.	.21	1.30		1.51	
	Minimum Charge	Job		269		269	
Molding							
Unfinished Base							
	Demolish	L.F.		.75		.75	Cost includes material and labor to install 1/2" x 2-1/2" pine or birch base molding.
	Install	L.F.	1.49	1.62		3.11	
	Demolish and Install	L.F.	1.49	2.37		3.86	
	Reinstall	L.F.		1.30		1.30	
	Clean	L.F.	.02	.24		.26	
	Paint	L.F.	.11	.48		.59	
	Minimum Charge	Job		269		269	
Unfinished Corner							
	Demolish	L.F.		.75		.75	Includes material and labor to install unfinished pine corner molding.
	Install	L.F.	2.27	2.24		4.51	
	Demolish and Install	L.F.	2.27	2.99		5.26	
	Reinstall	L.F.		1.79		1.79	
	Clean	L.F.	.02	.24		.26	
	Paint	L.F.	.19	.71		.90	
	Minimum Charge	Job		269		269	
Unfinished Cove							
	Demolish	L.F.		.75		.75	Cost includes material and labor to install 1 1/16" x 2-3/4" pine cove molding.
	Install	L.F.	2.99	2.03		5.02	
	Demolish and Install	L.F.	2.99	2.78		5.77	
	Reinstall	L.F.		1.62		1.62	
	Clean	L.F.	.02	.24		.26	
	Paint	L.F.	.19	.71		.90	
	Minimum Charge	Job		269		269	
Unfinished Crown							
	Demolish	L.F.		.90		.90	Includes material and labor to install unfinished pine crown molding.
	Install	L.F.	1.72	2.15		3.87	
	Demolish and Install	L.F.	1.72	3.05		4.77	
	Reinstall	L.F.		1.72		1.72	
	Clean	L.F.	.03	.31		.34	
	Paint	L.F.	.18	.48		.66	
	Minimum Charge	Job		269		269	
Prefinished Base							
	Demolish	L.F.		.75		.75	Cost includes material and labor to install 9/16" x 3-5/16" prefinished base molding.
	Install	L.F.	5.70	1.72		7.42	
	Demolish and Install	L.F.	5.70	2.47		8.17	
	Reinstall	L.F.		1.38		1.38	
	Clean	L.F.	.02	.24		.26	
	Paint	L.F.	.11	.48		.59	
	Minimum Charge	Job		269		269	
Prefinished Corner							
	Demolish	L.F.		.75		.75	Includes material and labor to install inside or outside prefinished corner molding.
	Install	L.F.	8.90	2.24		11.14	
	Demolish and Install	L.F.	8.90	2.99		11.89	
	Reinstall	L.F.		1.79		1.79	
	Clean	L.F.	.02	.24		.26	
	Paint	L.F.	.19	.71		.90	
	Minimum Charge	Job		269		269	

Walls / Ceilings

Wall Paneling		Unit	Material	Labor	Equip.	Total	Specification
Prefinished Crown							
	Demolish	L.F.		.90		.90	Cost includes material and labor to install 3/4" x 3-13/16" prefinished crown molding.
	Install	L.F.	7.65	2.15		9.80	
	Demolish and Install	L.F.	7.65	3.05		10.70	
	Reinstall	L.F.		1.72		1.72	
	Clean	L.F.	.03	.31		.34	
	Paint	L.F.	.18	.48		.66	
	Minimum Charge	Job		269		269	
Wallcovering		Unit	Material	Labor	Equip.	Total	Specification
Surface Prep							
Patch Walls							
	Install	S.F.	.21	5.15		5.36	Includes labor and material to repair section of plaster wall, area less than 20 S.F.
	Minimum Charge	Job		222		222	
Sizing							
	Install	S.F.	.09	.22		.31	Includes labor and materials to apply wall sizing.
	Minimum Charge	Job		222		222	
Good Grade Walls							
	Demolish	S.F.		.82		.82	Includes material and labor to install pre-pasted, vinyl-coated wallcovering.
	Install	S.F.	1.21	.92		2.13	
	Demolish and Install	S.F.	1.21	1.74		2.95	
	Clean	S.F.	.01	.10		.11	
	Minimum Charge	Job		222		222	
Ceiling							
	Demolish	S.F.		.82		.82	Includes material and labor to install pre-pasted, vinyl-coated wallcovering.
	Install	S.F.	1.21	.92		2.13	
	Demolish and Install	S.F.	1.21	1.74		2.95	
	Clean	S.F.	.02	.24		.26	
	Minimum Charge	Job		222		222	
Better Grade Walls							
	Demolish	S.F.		.82		.82	Includes material and labor to install pre-pasted, vinyl-coated wallcovering.
	Install	S.F.	1.28	.92		2.20	
	Demolish and Install	S.F.	1.28	1.74		3.02	
	Clean	S.F.	.01	.10		.11	
	Minimum Charge	Job		222		222	
Ceiling							
	Demolish	S.F.		.82		.82	Includes material and labor to install pre-pasted, vinyl-coated wallcovering.
	Install	S.F.	1.28	.92		2.20	
	Demolish and Install	S.F.	1.28	1.74		3.02	
	Clean	S.F.	.02	.24		.26	
	Minimum Charge	Job		222		222	
Premium Grade Walls							
	Demolish	S.F.		1.03		1.03	Includes material and labor to install pre-pasted, vinyl-coated wallcovering.
	Install	S.F.	1.20	.92		2.12	
	Demolish and Install	S.F.	1.20	1.95		3.15	
	Clean	S.F.	.01	.10		.11	
	Minimum Charge	Job		222		222	
Ceiling							
	Demolish	S.F.		1.03		1.03	Includes material and labor to install pre-pasted, vinyl-coated wallcovering.
	Install	S.F.	1.20	.92		2.12	
	Demolish and Install	S.F.	1.20	1.95		3.15	
	Clean	S.F.	.02	.24		.26	
	Minimum Charge	Job		222		222	

Walls / Ceilings

Wallcovering		Unit	Material	Labor	Equip.	Total	Specification
Mural							
Pre-printed							
	Demolish	Ea.		141		141	Includes material and labor to install wallcovering with a pre-printed mural.
	Install	Ea.	325	335		660	
	Demolish and Install	Ea.	325	476		801	
	Clean	Ea.		10.10		10.10	
	Minimum Charge	Job		222		222	
Hand-painted							
	Demolish	Ea.		141		141	Includes material and labor to install wallcovering with a hand-painted mural.
	Install	Ea.	620	670		1290	
	Demolish and Install	Ea.	620	811		1431	
	Clean	Ea.		10.10		10.10	
	Minimum Charge	Job		222		222	
Vinyl-coated							
Good Grade							
	Demolish	Ea.		25		25	Includes material and labor to install pre-pasted, vinyl-coated wallcovering. Based upon 30 S.F. rolls.
	Install	Ea.	2.43	31		33.43	
	Demolish and Install	Ea.	2.43	56		58.43	
	Clean	Ea.		10.10		10.10	
	Minimum Charge	Job		222		222	
Better Grade							
	Demolish	Ea.		25		25	Includes material and labor to install pre-pasted, vinyl-coated wallcovering. Based upon 30 S.F. rolls.
	Install	Ea.	29	31		60	
	Demolish and Install	Ea.	29	56		85	
	Clean	Ea.		10.10		10.10	
	Minimum Charge	Job		222		222	
Premium Grade							
	Demolish	Ea.		25		25	Includes material and labor to install pre-pasted, vinyl-coated wallcovering. Based upon 30 S.F. rolls.
	Install	Ea.	42.50	31		73.50	
	Demolish and Install	Ea.	42.50	56		98.50	
	Clean	Ea.		10.10		10.10	
	Minimum Charge	Job		222		222	
Blank Underliner							
	Demolish	Ea.		25		25	Includes material and labor to install blank stock liner paper or bridging paper. Based upon 30 S.F. rolls.
	Install	Ea.	29.50	31.50		61	
	Demolish and Install	Ea.	29.50	56.50		86	
	Clean	Ea.		10.10		10.10	
	Minimum Charge	Job		222		222	
Solid Vinyl							
Good Grade							
	Demolish	Roll		27.50		27.50	Includes material and labor to install pre-pasted, vinyl wallcovering. Based upon 30 S.F. rolls.
	Install	Ea.	28	31		59	
	Demolish and Install	Ea.	28	58.50		86.50	
	Clean	Ea.		10.10		10.10	
	Minimum Charge	Job		222		222	
Better Grade							
	Demolish	Roll		27.50		27.50	Includes material and labor to install pre-pasted, vinyl wallcovering. Based upon 30 S.F. rolls.
	Install	Ea.	40	31		71	
	Demolish and Install	Ea.	40	58.50		98.50	
	Clean	Ea.		10.10		10.10	
	Minimum Charge	Job		222		222	
Premium Grade							
	Demolish	Roll		27.50		27.50	Includes material and labor to install pre-pasted, vinyl wallcovering. Based upon 30 S.F. rolls.
	Install	Ea.	51.50	31		82.50	
	Demolish and Install	Ea.	51.50	58.50		110	
	Clean	Ea.		10.10		10.10	
	Minimum Charge	Job		222		222	

Walls / Ceilings

Wallcovering		Unit	Material	Labor	Equip.	Total	Specification
Blank Underliner							
	Demolish	Ea.		25		25	Includes material and labor to install blank stock liner paper or bridging paper. Based upon 30 S.F. rolls.
	Install	Ea.	29.50	31.50		61	
	Demolish and Install	Ea.	29.50	56.50		86	
	Clean	Ea.		10.10		10.10	
	Minimum Charge	Job		222		222	
Grasscloth / String							
Good Grade							
	Demolish	Ea.		25		25	Includes material and labor to install grasscloth or string wallcovering. Based upon 30 S.F. rolls.
	Install	Ea.	55.50	40.50		96	
	Demolish and Install	Ea.	55.50	65.50		121	
	Clean	Ea.		13.50		13.50	
	Minimum Charge	Job		222		222	
Better Grade							
	Demolish	Ea.		25		25	Includes material and labor to install grasscloth or string wallcovering. Based upon 30 S.F. rolls.
	Install	Ea.	69	40.50		109.50	
	Demolish and Install	Ea.	69	65.50		134.50	
	Clean	Ea.		13.50		13.50	
	Minimum Charge	Job		222		222	
Premium Grade							
	Demolish	Ea.		25		25	Includes material and labor to install grasscloth or string wallcovering. Based upon 30 S.F. rolls.
	Install	Ea.	72.50	40.50		113	
	Demolish and Install	Ea.	72.50	65.50		138	
	Clean	Ea.		13.50		13.50	
	Minimum Charge	Job		222		222	
Blank Underliner							
	Demolish	Ea.		25		25	Includes material and labor to install blank stock liner paper or bridging paper. Based upon 30 S.F. rolls.
	Install	Ea.	29.50	31.50		61	
	Demolish and Install	Ea.	29.50	56.50		86	
	Clean	Ea.		10.10		10.10	
	Minimum Charge	Job		222		222	
Designer							
Premium Grade							
	Demolish	S.F.		1.03		1.03	Includes material and labor to install paperback vinyl, untrimmed and hand-painted. Based upon 30 S.F. rolls.
	Install	Ea.	149	46.50		195.50	
	Demolish and Install	Ea.	149	47.53		196.53	
	Clean	Ea.		10.10		10.10	
	Minimum Charge	Job		222		222	
Blank Underliner							
	Demolish	Ea.		25		25	Includes material and labor to install blank stock liner paper or bridging paper. Based upon 30 S.F. rolls.
	Install	Ea.	29.50	31.50		61	
	Demolish and Install	Ea.	29.50	56.50		86	
	Clean	Ea.		10.10		10.10	
	Minimum Charge	Job		222		222	
Foil							
	Demolish	Ea.		25		25	Includes material and labor to install foil coated wallcovering. Based upon 30 S.F. rolls.
	Install	Ea.	98.50	40.50		139	
	Demolish and Install	Ea.	98.50	65.50		164	
	Clean	Ea.		10.10		10.10	
	Minimum Charge	Job		222		222	
Wallcovering Border							
Good Grade							
	Demolish	L.F.		1.64		1.64	Includes material and labor install vinyl-coated border 4" to 6" wide.
	Install	L.F.	2.13	1.71		3.84	
	Demolish and Install	L.F.	2.13	3.35		5.48	
	Clean	L.F.		.15		.15	
	Minimum Charge	Job		222		222	

Walls / Ceilings

Wallcovering		Unit	Material	Labor	Equip.	Total	Specification
Better Grade							
	Demolish	L.F.		1.64		1.64	Includes material and labor install vinyl-coated border 4" to 6" wide.
	Install	L.F.	2.24	1.71		3.95	
	Demolish and Install	L.F.	2.24	3.35		5.59	
	Clean	L.F.		.15		.15	
	Minimum Charge	Job		222		222	
Premium Grade							
	Demolish	L.F.		1.64		1.64	Includes material and labor install vinyl-coated border 4" to 6" wide.
	Install	L.F.	4.04	1.71		5.75	
	Demolish and Install	L.F.	4.04	3.35		7.39	
	Clean	L.F.		.15		.15	
	Minimum Charge	Job		222		222	
Acoustical Ceiling		Unit	Material	Labor	Equip.	Total	Specification
Complete System							
2' x 2' Square Edge							
	Demolish	S.F.		.75		.75	Includes material and labor to install T-bar grid acoustical ceiling system, random pinhole 5/8" thick square edge tile.
	Install	S.F.	4.83	1.65		6.48	
	Demolish and Install	S.F.	4.83	2.40		7.23	
	Reinstall	S.F.		1.32		1.32	
	Clean	S.F.	.03	.31		.34	
	Minimum Charge	Job		269		269	
2' x 2' Reveal Edge							
	Demolish	S.F.		.75		.75	Includes material and labor to install T-bar grid acoustical ceiling system, random pinhole 5/8" thick reveal edge tile.
	Install	S.F.	5.70	2.15		7.85	
	Demolish and Install	S.F.	5.70	2.90		8.60	
	Reinstall	S.F.		1.72		1.72	
	Clean	S.F.	.03	.31		.34	
	Minimum Charge	Job		269		269	
2' x 2' Fire-rated							
	Demolish	S.F.		.75		.75	Includes material and labor to install T-bar grid FR acoustical ceiling system, random pinhole 5/8" thick square edge tile.
	Install	S.F.	5.85	1.65		7.50	
	Demolish and Install	S.F.	5.85	2.40		8.25	
	Reinstall	S.F.		1.32		1.32	
	Clean	S.F.	.03	.31		.34	
	Minimum Charge	Job		269		269	
2' x 4' Square Edge							
	Demolish	S.F.		.75		.75	Cost includes material and labor to install 2' x 4' T-bar grid acoustical ceiling system, random pinhole 5/8" thick square edge tile.
	Install	S.F.	5.70	1.41		7.11	
	Demolish and Install	S.F.	5.70	2.16		7.86	
	Reinstall	S.F.		1.13		1.13	
	Clean	S.F.	.03	.31		.34	
	Minimum Charge	Job		269		269	
2' x 4' Reveal Edge							
	Demolish	S.F.		.75		.75	Includes material and labor to install T-bar grid acoustical ceiling system, random pinhole 5/8" thick reveal edge tile.
	Install	S.F.	5.10	1.95		7.05	
	Demolish and Install	S.F.	5.10	2.70		7.80	
	Reinstall	S.F.		1.56		1.56	
	Clean	S.F.	.03	.31		.34	
	Minimum Charge	Job		269		269	
2' x 4' Fire-rated							
	Demolish	S.F.		.75		.75	Includes material and labor to install T-bar grid FR acoustical ceiling system, random pinhole 5/8" thick square edge tile.
	Install	S.F.	5.85	1.65		7.50	
	Demolish and Install	S.F.	5.85	2.40		8.25	
	Reinstall	S.F.		1.32		1.32	
	Clean	S.F.	.03	.31		.34	
	Minimum Charge	Job		269		269	

Walls / Ceilings


Acoustical Ceiling		Unit	Material	Labor	Equip.	Total	Specification
T-bar Grid							
2' x 2'							
	Demolish	S.F.		.88		.88	Includes material and labor to install T-bar grid acoustical ceiling suspension system.
	Install	S.F.	2.34	.83		3.17	
	Demolish and Install	S.F.	2.34	1.71		4.05	
	Reinstall	S.F.		.66		.66	
	Clean	S.F.	.03	.31		.34	
	Minimum Charge	Job		258		258	
2' x 4'							
	Demolish	S.F.		.88		.88	Includes material and labor to install T-bar grid acoustical ceiling suspension system.
	Install	S.F.	1.90	.67		2.57	
	Demolish and Install	S.F.	1.90	1.55		3.45	
	Reinstall	S.F.		.54		.54	
	Clean	S.F.	.03	.31		.34	
	Minimum Charge	Job		258		258	
Tile Panels							
2' x 2' Square Edge							
	Demolish	S.F.		.25		.25	Includes material and labor to install square edge panels 5/8" thick with pinhole pattern. T-bar grid not included.
	Install	S.F.	2.26	.86		3.12	
	Demolish and Install	S.F.	2.26	1.11		3.37	
	Reinstall	S.F.		.69		.69	
	Clean	S.F.	.03	.31		.34	
	Minimum Charge	Job		269		269	
2' x 2' Reveal Edge							
	Demolish	S.F.		.25		.25	Includes material and labor to install reveal edge panels 5/8" thick with pinhole pattern. T-bar grid not included.
	Install	S.F.	2.53	1.14		3.67	
	Demolish and Install	S.F.	2.53	1.39		3.92	
	Reinstall	S.F.		.92		.92	
	Clean	S.F.	.03	.31		.34	
	Minimum Charge	Job		269		269	
2' x 2' Fire-rated							
	Demolish	S.F.		.25		.25	Includes material and labor to install FR square edge panels 5/8" thick with pinhole pattern. T-bar grid not included.
	Install	S.F.	3.71	.80		4.51	
	Demolish and Install	S.F.	3.71	1.05		4.76	
	Reinstall	S.F.		.64		.64	
	Clean	S.F.	.03	.31		.34	
	Minimum Charge	Job		269		269	
2' x 4' Square Edge							
	Demolish	S.F.		.25		.25	Includes material and labor to install square edge panels 5/8" thick with pinhole pattern. T-bar grid not included.
	Install	S.F.	2.26	.86		3.12	
	Demolish and Install	S.F.	2.26	1.11		3.37	
	Reinstall	S.F.		.69		.69	
	Clean	S.F.	.03	.31		.34	
	Minimum Charge	Job		269		269	
2' x 4' Reveal Edge							
	Demolish	S.F.		.25		.25	Includes material and labor to install reveal edge panels 5/8" thick with pinhole pattern. T-bar grid not included.
	Install	S.F.	2.53	1.14		3.67	
	Demolish and Install	S.F.	2.53	1.39		3.92	
	Reinstall	S.F.		.92		.92	
	Clean	S.F.	.03	.31		.34	
	Minimum Charge	Job		269		269	
2' x 4' Fire-rated							
	Demolish	S.F.		.25		.25	Includes material and labor to install FR square edge panels 5/8" thick with pinhole pattern. T-bar grid not included.
	Install	S.F.	3.71	.80		4.51	
	Demolish and Install	S.F.	3.71	1.05		4.76	
	Reinstall	S.F.		.64		.64	
	Clean	S.F.	.03	.31		.34	
	Minimum Charge	Job		269		269	

Walls / Ceilings


Acoustical Ceiling		Unit	Material	Labor	Equip.	Total	Specification
Bleach Out Stains							
	Install	S.F.	.18	.40		.58	Includes labor and material to apply laundry type chlorine bleach to remove light staining of acoustic tile material.
	Minimum Charge	Job		269		269	
Adhesive Tile							
Good Grade							
	Demolish	S.F.		1		1	Cost includes material and labor to install 12" x 12" tile with embossed texture pattern. Furring strips not included.
	Install	S.F.	2.04	1.79		3.83	
	Demolish and Install	S.F.	2.04	2.79		4.83	
	Clean	S.F.	.02	.24		.26	
	Minimum Charge	Job		269		269	
Better Grade							
	Demolish	S.F.		1		1	Cost includes material and labor to install 12" x 12" tile with embossed texture pattern. Furring strips not included.
	Install	S.F.	2.22	1.79		4.01	
	Demolish and Install	S.F.	2.22	2.79		5.01	
	Clean	S.F.	.02	.24		.26	
	Minimum Charge	Job		269		269	
Premium Grade							
	Demolish	S.F.		1		1	Cost includes material and labor to install 12" x 12" tile with embossed texture pattern. Furring strips not included.
	Install	S.F.	2.68	1.79		4.47	
	Demolish and Install	S.F.	2.68	2.79		5.47	
	Clean	S.F.	.02	.24		.26	
	Minimum Charge	Job		269		269	
Bleach Out Stains							
	Install	S.F.	.18	.40		.58	Includes labor and material to apply laundry type chlorine bleach to remove light staining of acoustic tile material.
	Minimum Charge	Job		269		269	
Stapled Tile							
Good Grade							
	Demolish	S.F.		.60		.60	Cost includes material and labor to install 12" x 12" tile with embossed texture pattern. Furring strips not included.
	Install	S.F.	2.04	1.79		3.83	
	Demolish and Install	S.F.	2.04	2.39		4.43	
	Clean	S.F.	.02	.24		.26	
	Minimum Charge	Job		269		269	
Better Grade							
	Demolish	S.F.		.60		.60	Cost includes material and labor to install 12" x 12" tile with embossed texture pattern. Furring strips not included.
	Install	S.F.	2.22	1.79		4.01	
	Demolish and Install	S.F.	2.22	2.39		4.61	
	Clean	S.F.	.02	.24		.26	
	Minimum Charge	Job		269		269	
Premium Grade							
	Demolish	S.F.		.60		.60	Cost includes material and labor to install 12" x 12" tile with embossed texture pattern. Furring strips not included.
	Install	S.F.	2.68	1.79		4.47	
	Demolish and Install	S.F.	2.68	2.39		5.07	
	Clean	S.F.	.02	.24		.26	
	Minimum Charge	Job		269		269	
Bleach Out Stains							
	Install	S.F.	.18	.40		.58	Includes labor and material to apply laundry type chlorine bleach to remove light staining of acoustic tile material.
	Minimum Charge	Job		269		269	

Walls / Ceilings


Acoustical Ceiling		Unit	Material	Labor	Equip.	Total	Specification
Blown							
Scrape Off Existing	Install	S.F.		.83		.83	Includes labor and material to remove existing blown acoustical ceiling material.
	Minimum Charge	Job		269		269	
Seal Ceiling Gypsum Wallboard	Install	S.F.	.13	.38		.51	Includes labor and material to seal existing drywall with shellac-based material.
	Minimum Charge	Job		220		220	
Reblow Existing	Install	S.F.	.07	.68	96.50	.75	Includes labor and material to install by spray, texture finish.
	Minimum Charge	Job		690		786.50	
Bleach Out Stains	Install	S.F.	.18	.40		.58	Includes labor and material to apply laundry type chlorine bleach to remove light staining of acoustic tile material.
	Minimum Charge	Job		269		269	
New Blown	Install	S.F.	.07	.68		.75	Includes labor and material to install by spray, texture finish.
	Minimum Charge	Job		220		220	
Apply Glitter To	Install	S.F.	.03	.21		.24	Includes labor and material to apply glitter material to existing or new drywall.
	Minimum Charge	Job		220		220	
Furring Strips	Demolish	S.F.		.11		.11	Cost includes material and labor to install 1" x 2" furring strips, 16" O.C. per S.F. of surface area to be covered.
	Install	S.F.	.21	1.19		1.40	
	Demolish and Install	S.F.	.21	1.30		1.51	
	Minimum Charge	Job		134		134	



Finished Stair

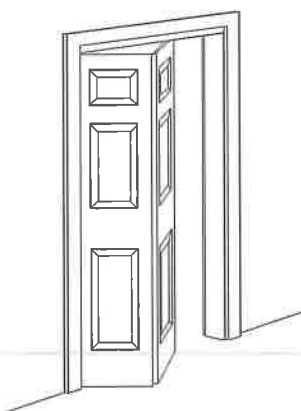

Bi-Fold Door



Raised Panel Door

Hollow Core Door		Unit	Material	Labor	Equip.	Total	Specification
Pre-hung Wood							
1' 6" x 6' 8"							
	Demolish	Ea.		50		50	Cost includes material and labor to install 1' 6" x 6' 8" pre-hung 1-3/8" lauan door with split pine jamb including casing, stops, and hinges.
	Install	Ea.	330	30		360	
	Demolish and Install	Ea.	330	80		410	
	Reinstall	Ea.		29.87		29.87	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	16.70	63		79.70	
	Minimum Charge	Job		269		269	
2' x 6' 8"							
	Demolish	Ea.		50		50	Cost includes material and labor to install 2' x 6' 8" pre-hung 1-3/8" lauan door with split pine jamb including casing, stops, and hinges.
	Install	Ea.	345	31.50		376.50	
	Demolish and Install	Ea.	345	81.50		426.50	
	Reinstall	Ea.		31.62		31.62	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	16.70	63		79.70	
	Minimum Charge	Job		269		269	
2' 4" x 6' 8"							
	Demolish	Ea.		50		50	Cost includes material and labor to install 2' 4" x 6' 8" pre-hung 1-3/8" lauan door with split pine jamb including casing, stops, and hinges.
	Install	Ea.	360	31.50		391.50	
	Demolish and Install	Ea.	360	81.50		441.50	
	Reinstall	Ea.		31.62		31.62	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	16.70	63		79.70	
	Minimum Charge	Job		269		269	
2' 6" x 6' 8"							
	Demolish	Ea.		50		50	Cost includes material and labor to install 2' 6" x 6' 8" pre-hung 1-3/8" lauan door with split pine jamb including casing, stops, and hinges.
	Install	Ea.	360	31.50		391.50	
	Demolish and Install	Ea.	360	81.50		441.50	
	Reinstall	Ea.		31.62		31.62	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	16.70	63		79.70	
	Minimum Charge	Job		269		269	
2' 8" x 6' 8"							
	Demolish	Ea.		50		50	Cost includes material and labor to install 2' 8" x 6' 8" pre-hung 1-3/8" lauan door with split pine jamb, including casing, stop and hinges.
	Install	Ea.	365	31.50		396.50	
	Demolish and Install	Ea.	365	81.50		446.50	
	Reinstall	Ea.		31.62		31.62	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	16.70	63		79.70	
	Minimum Charge	Job		269		269	

Finish Carpentry

Hollow Core Door		Unit	Material	Labor	Equip.	Total	Specification
3' x 6' 8"							
	Demolish	Ea.		50		50	Cost includes material and labor to install 3' x 6' 8" pre-hung 1-3/8" luan door with split pine jamb including casing, stops, and hinges.
	Install	Ea.	375	33.50		408.50	
	Demolish and Install	Ea.	375	83.50		458.50	
	Reinstall	Ea.		33.60		33.60	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	16.70	63		79.70	
	Minimum Charge	Job		269		269	
Pocket Type							
	Demolish	Ea.		74.50		74.50	Cost includes material and labor to install 2' 8" x 6' 8" luan door.
	Install	Ea.	125	59.50		184.50	
	Demolish and Install	Ea.	125	134		259	
	Reinstall	Ea.		59.73		59.73	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	16.70	63		79.70	
	Minimum Charge	Job		269		269	
Stain							
	Install	Ea.	17.35	36.50		53.85	Includes labor and material to stain single door and trim on both sides.
	Minimum Charge	Job		220		220	
Pre-hung Masonite							
1' 6" x 6' 8"							
	Demolish	Ea.		50		50	Cost includes material and labor to install 1' 6" x 6' 8" pre-hung 1-3/8" masonite door with split pine jamb including casing, stops, and hinges.
	Install	Ea.	480	30		510	
	Demolish and Install	Ea.	480	80		560	
	Reinstall	Ea.		29.87		29.87	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	16.70	63		79.70	
	Minimum Charge	Job		269		269	
2' x 6' 8"							
	Demolish	Ea.		50		50	Cost includes material and labor to install 2' x 6' 8" pre-hung 1-3/8" masonite door with split pine jamb including casing, stops, and hinges.
	Install	Ea.	525	31.50		556.50	
	Demolish and Install	Ea.	525	81.50		606.50	
	Reinstall	Ea.		31.62		31.62	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	16.70	63		79.70	
	Minimum Charge	Job		269		269	
2' 4" x 6' 8"							
	Demolish	Ea.		50		50	Cost includes material and labor to install 2' 4" x 6' 8" pre-hung 1-3/8" masonite door with split pine jamb including casing, stops, and hinges.
	Install	Ea.	545	31.50		576.50	
	Demolish and Install	Ea.	545	81.50		626.50	
	Reinstall	Ea.		31.62		31.62	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	16.70	63		79.70	
	Minimum Charge	Job		269		269	
2' 8" x 6' 8"							
	Demolish	Ea.		50		50	Cost includes material and labor to install 2' 8" x 6' 8" pre-hung 1-3/8" masonite door with split pine jamb including casing, stops, and hinges.
	Install	Ea.	580	31.50		611.50	
	Demolish and Install	Ea.	580	81.50		661.50	
	Reinstall	Ea.		31.62		31.62	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	16.70	63		79.70	
	Minimum Charge	Job		269		269	
3' x 6' 8"							
	Demolish	Ea.		50		50	Cost includes material and labor to install 3' x 6' 8" pre-hung 1-3/8" masonite door with split pine jamb including casing, stops, and hinges.
	Install	Ea.	605	33.50		638.50	
	Demolish and Install	Ea.	605	83.50		688.50	
	Reinstall	Ea.		33.60		33.60	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	16.70	63		79.70	
	Minimum Charge	Job		269		269	

Finish Carpentry

Hollow Core Door		Unit	Material	Labor	Equip.	Total	Specification
Pocket Type							
	Demolish	Ea.		74.50		74.50	Cost includes material and labor to install 2' 8" x 6' 8" luan door.
	Install	Ea.	125	59.50		184.50	
	Demolish and Install	Ea.	125	134		259	
	Reinstall	Ea.		59.73		59.73	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	16.70	63		79.70	
	Minimum Charge	Job		269		269	
Stain							
	Install	Ea.	17.35	36.50		53.85	Includes labor and material to stain single door and trim on both sides.
	Minimum Charge	Job		220		220	
Hollow Core Door Only							
1' 6" x 6' 8"							
	Demolish	Ea.		10.65		10.65	Cost includes material and labor to install 1' 6" x 6' 8" luan hollow core door slab.
	Install	Ea.	100	28.50		128.50	
	Demolish and Install	Ea.	100	39.15		139.15	
	Reinstall	Ea.		28.29		28.29	
	Clean	Ea.	1.36	12.65		14.01	
	Paint	Ea.	8.85	55		63.85	
	Minimum Charge	Job		269		269	
2' x 6' 8"							
	Demolish	Ea.		10.65		10.65	Cost includes material and labor to install 2' x 6' 8" luan hollow core door slab.
	Install	Ea.	114	30		144	
	Demolish and Install	Ea.	114	40.65		154.65	
	Reinstall	Ea.		29.87		29.87	
	Clean	Ea.	1.36	12.65		14.01	
	Paint	Ea.	8.85	55		63.85	
	Minimum Charge	Job		269		269	
2' 4" x 6' 8"							
	Demolish	Ea.		10.65		10.65	Cost includes material and labor to install 2' 4" x 6' 8" luan hollow core door slab.
	Install	Ea.	127	30		157	
	Demolish and Install	Ea.	127	40.65		167.65	
	Reinstall	Ea.		29.87		29.87	
	Clean	Ea.	1.36	12.65		14.01	
	Paint	Ea.	8.85	55		63.85	
	Minimum Charge	Job		269		269	
2' 8" x 6' 8"							
	Demolish	Ea.		10.65		10.65	Cost includes material and labor to install 2' 8" x 6' 8" luan hollow core door slab.
	Install	Ea.	131	30		161	
	Demolish and Install	Ea.	131	40.65		171.65	
	Reinstall	Ea.		29.87		29.87	
	Clean	Ea.	1.36	12.65		14.01	
	Paint	Ea.	8.85	55		63.85	
	Minimum Charge	Job		269		269	
3' x 6' 8"							
	Demolish	Ea.		10.65		10.65	Cost includes material and labor to install 3' x 6' 8" luan hollow core door slab.
	Install	Ea.	140	31.50		171.50	
	Demolish and Install	Ea.	140	42.15		182.15	
	Reinstall	Ea.		31.62		31.62	
	Clean	Ea.	1.36	12.65		14.01	
	Paint	Ea.	8.85	55		63.85	
	Minimum Charge	Job		269		269	
Pocket Type							
	Demolish	Ea.		10.65		10.65	Cost includes material and labor to install 2' 8" x 6' 8" luan door.
	Install	Ea.	125	59.50		184.50	
	Demolish and Install	Ea.	125	70.15		195.15	
	Reinstall	Ea.		59.73		59.73	
	Clean	Ea.	1.36	12.65		14.01	
	Paint	Ea.	8.85	55		63.85	
	Minimum Charge	Job		269		269	

Finish Carpentry

Hollow Core Door		Unit	Material	Labor	Equip.	Total	Specification
Stain	Install	Ea.	9.55	49		58.55	Includes labor and materials to stain a flush style door on both sides by brush.
	Minimum Charge	Job		220		220	
Casing Trim							
Single Width							
	Demolish	Ea.		9.50		9.50	Cost includes material and labor to install 11/16" x 2-1/2" pine ranch style casing for one side of a standard door opening.
	Install	Opng.	28	45		73	
	Demolish and Install	Opng.	28	54.50		82.50	
	Reinstall	Opng.		35.84		35.84	
	Clean	Opng.	.46	4.05		4.51	
	Paint	Ea.	11.20	8.80		20	Minimum Charge
	Minimum Charge	Job		269		269	
Double Width							
	Demolish	Ea.		11.25		11.25	Cost includes material and labor to install 11/16" x 2-1/2" pine ranch style door casing for one side of a double door opening.
	Install	Opng.	33	54		87	
	Demolish and Install	Opng.	33	65.25		98.25	
	Reinstall	Opng.		43.01		43.01	
	Clean	Opng.	.55	8.10		8.65	
	Paint	Ea.	11.20	10		21.20	Minimum Charge
	Minimum Charge	Job		269		269	
Hardware							
Doorknob w / Lock							
	Demolish	Ea.		21.50		21.50	Includes material and labor to install privacy lockset.
	Install	Ea.	68	33.50		101.50	
	Demolish and Install	Ea.	68	55		123	
	Reinstall	Ea.		26.88		26.88	
	Clean	Ea.	.33	12.65		12.98	
	Minimum Charge	Job		269		269	
Doorknob							
	Demolish	Ea.		21.50		21.50	Includes material and labor to install residential passage lockset, keyless bored type.
	Install	Ea.	66	33.50		99.50	
	Demolish and Install	Ea.	66	55		121	
	Reinstall	Ea.		26.88		26.88	
	Clean	Ea.	.33	12.65		12.98	
	Minimum Charge	Job		269		269	
Deadbolt							
	Demolish	Ea.		18.65		18.65	Includes material and labor to install a deadbolt.
	Install	Ea.	142	38.50		180.50	
	Demolish and Install	Ea.	142	57.15		199.15	
	Reinstall	Ea.		30.72		30.72	
	Clean	Ea.	.33	12.65		12.98	
	Minimum Charge	Job		269		269	
Lever Handle							
	Demolish	Ea.		21.50		21.50	Includes material and labor to install residential passage lockset, keyless bored type with lever handle.
	Install	Ea.	284	54		338	
	Demolish and Install	Ea.	284	75.50		359.50	
	Reinstall	Ea.		43.01		43.01	
	Clean	Ea.	.33	12.65		12.98	
	Minimum Charge	Job		269		269	
Closer							
	Demolish	Ea.		11.20		11.20	Includes material and labor to install pneumatic light duty closer for interior type doors.
	Install	Ea.	272	82.50		354.50	
	Demolish and Install	Ea.	272	93.70		365.70	
	Reinstall	Ea.		66.17		66.17	
	Clean	Ea.	.17	16.85		17.02	
	Minimum Charge	Job		269		269	

Finish Carpentry

Hollow Core Door		Unit	Material	Labor	Equip.	Total	Specification
Push Plate							
	Demolish	Ea.		16.60		16.60	Includes material and labor to install bronze push-pull plate.
	Install	Ea.	39.50	45		84.50	
	Demolish and Install	Ea.	39.50	61.60		101.10	
	Reinstall	Ea.		35.84		35.84	
	Clean	Ea.	.33	12.65		12.98	
	Minimum Charge	Job		269		269	
Kickplate							
	Demolish	Ea.		16.60		16.60	Includes material and labor to install aluminum kickplate, 10" x 28".
	Install	Ea.	42.50	36		78.50	
	Demolish and Install	Ea.	42.50	52.60		95.10	
	Reinstall	Ea.		28.67		28.67	
	Clean	Ea.	.33	12.65		12.98	
	Minimum Charge	Job		269		269	
Exit Sign							
	Demolish	Ea.		32.50		32.50	Includes material and labor to install a wall mounted interior electric exit sign.
	Install	Ea.	127	80.50		207.50	
	Demolish and Install	Ea.	127	113		240	
	Reinstall	Ea.		64.52		64.52	
	Clean	Ea.	.02	10.25		10.27	
	Minimum Charge	Job		269		269	
Jamb							
	Demolish	Ea.		37.50		37.50	Includes material and labor to install flat pine jamb with square cut heads and rabbeted sides for 6' 8" high and 3-9/16" door including trim sets for both sides.
	Install	Ea.	157	14.55		171.55	
	Demolish and Install	Ea.	157	52.05		209.05	
	Clean	Ea.	.10	10.10		10.20	
	Paint	Ea.	15.80	29.50		45.30	
	Minimum Charge	Job		269		269	
Shave & Refit							
	Install	Ea.		45		45	Includes labor to shave and rework door to fit opening at the job site.
	Minimum Charge	Job		269		269	

Solid Core Door		Unit	Material	Labor	Equip.	Total	Specification
Pre-hung Wood							
2' 4" x 6' 8"							
	Demolish	Ea.		50		50	Cost includes material and labor to install 2' 4" x 6' 8" pre-hung 1-3/4" door, 4-1/2" split jamb, including casing and stop, hinges, aluminum sill, weatherstripping.
	Install	Ea.	500	31.50		531.50	
	Demolish and Install	Ea.	500	81.50		581.50	
	Reinstall	Ea.		31.62		31.62	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	25	63		88	
	Minimum Charge	Job		269		269	
2' 6" x 6' 8"							
	Demolish	Ea.		50		50	Cost includes material and labor to install 2' 6" x 6' 8" pre-hung 1-3/4" door, 4-1/2" split jamb, including casing and stop, hinges, aluminum sill, weatherstripping.
	Install	Ea.	525	31.50		556.50	
	Demolish and Install	Ea.	525	81.50		606.50	
	Reinstall	Ea.		31.62		31.62	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	25	63		88	
	Minimum Charge	Job		269		269	

Finish Carpentry

Solid Core Door		Unit	Material	Labor	Equip.	Total	Specification
2' 8" x 6' 8"	Demolish	Ea.		50		50	Cost includes material and labor to install 2' 8" x 6' 8" pre-hung 1-3/4" door, 4-1/2" split jamb, including casing and stop, hinges, aluminum sill, weatherstripping.
	Install	Ea.	535	31.50		566.50	
	Demolish and Install	Ea.	535	81.50		616.50	
	Reinstall	Ea.		31.62		31.62	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	25	63		88	
	Minimum Charge	Job		269		269	
3' x 6' 8"	Demolish	Ea.		50		50	Cost includes material and labor to install 3' x 6' 8" pre-hung 1-3/4" door, including casing and stop, hinges, jamb, aluminum sill, weatherstripping.
	Install	Ea.	555	33.50		588.50	
	Demolish and Install	Ea.	555	83.50		638.50	
	Reinstall	Ea.		33.60		33.60	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	25	63		88	
	Minimum Charge	Job		269		269	
3' 6" x 6' 8"	Demolish	Ea.		50		50	Cost includes material and labor to install 3' 6" x 6' 8" pre-hung 1-3/4" door, 4-1/2" split jamb, including casing and stop, hinges, aluminum sill, weatherstripping.
	Install	Ea.	525	36		561	
	Demolish and Install	Ea.	525	86		611	
	Reinstall	Ea.		35.84		35.84	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	25	63		88	
	Minimum Charge	Job		269		269	
Raised Panel	Demolish	Ea.		50		50	Cost includes material and labor to install 3' x 6' 8" pre-hung 1-3/4" door, jamb, including casing and stop, hinges, aluminum sill, weatherstripping.
	Install	Ea.	525	30		555	
	Demolish and Install	Ea.	525	80		605	
	Reinstall	Ea.		29.87		29.87	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	25	147		172	
	Minimum Charge	Job		269		269	
Stain	Install	Ea.	17.35	36.50		53.85	Includes labor and material to stain single door and trim on both sides.
	Minimum Charge	Job		220		220	

Bifold Door		Unit	Material	Labor	Equip.	Total	Specification
Wood, Single 3'	Demolish	Ea.		37.50		37.50	Cost includes material and labor to install 3' wide solid wood bi-fold door not including jamb, trim, track, and hardware.
	Install	Ea.	255	82.50		337.50	
	Demolish and Install	Ea.	255	120		375	
	Reinstall	Ea.		82.71		82.71	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	16.70	63		79.70	
	Minimum Charge	Job		269		269	
5'	Demolish	Ea.		37.50		37.50	Includes material and labor to install pair of 2' 6" wide solid wood bi-fold doors not including jamb, trim, track, and hardware.
	Install	Ea.	445	98		543	
	Demolish and Install	Ea.	445	135.50		580.50	
	Reinstall	Ea.		97.75		97.75	
	Clean	Ea.	1.43	29		30.43	
	Paint	Ea.	61.50	110		171.50	
	Minimum Charge	Job		269		269	

Finish Carpentry

Bifold Door		Unit	Material	Labor	Equip.	Total	Specification
6'	Demolish	Ea.		37.50		37.50	Includes material and labor to install pair of 3' wide solid wood bi-fold doors not including jamb, trim, track, and hardware.
	Install	Ea.	675	108		783	
	Demolish and Install	Ea.	675	145.50		820.50	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	1.64	33.50		35.14	
	Paint	Ea.	61.50	110		171.50	
	Minimum Charge	Job		269		269	
8'	Demolish	Ea.		37.50		37.50	Includes material and labor to install pair of 4' wide solid wood bi-fold doors not including jamb, trim, track, and hardware.
	Install	Ea.	1200	119		1319	
	Demolish and Install	Ea.	1200	156.50		1356.50	
	Reinstall	Ea.		119.47		119.47	
	Clean	Ea.	2.24	40.50		42.74	
	Paint	Ea.	32	110		142	
	Minimum Charge	Job		269		269	
Mirrored							
6'	Demolish	Ea.		37.50		37.50	Includes material and labor to install pair of 3' wide mirrored bi-fold doors including jamb, trim, track, and hardware.
	Install	Ea.	1075	59.50		1134.50	
	Demolish and Install	Ea.	1075	97		1172	
	Reinstall	Ea.		59.73		59.73	
	Clean	Ea.	1.64	16.85		18.49	
	Minimum Charge	Job		269		269	
8'	Demolish	Ea.		37.50		37.50	Includes material and labor to install pair of 4' wide mirrored bi-fold doors including jamb, trim, track, and hardware.
	Install	Ea.	1675	89.50		1764.50	
	Demolish and Install	Ea.	1675	127		1802	
	Reinstall	Ea.		89.60		89.60	
	Clean	Ea.	2.24	20		22.24	
	Minimum Charge	Job		269		269	
Louvered							
3'	Demolish	Ea.		37.50		37.50	Cost includes material and labor to install 3' wide louvered bi-fold door not including jamb, trim, track, and hardware.
	Install	Ea.	227	82.50		309.50	
	Demolish and Install	Ea.	227	120		347	
	Reinstall	Ea.		82.71		82.71	
	Clean	Ea.	3.27	16.85		20.12	
	Paint	Ea.	16.70	63		79.70	
	Minimum Charge	Job		269		269	
5'	Demolish	Ea.		37.50		37.50	Includes material and labor to install pair of 2' 6" wide louvered wood bi-fold doors not including jamb, trim, track, and hardware.
	Install	Ea.	415	98		513	
	Demolish and Install	Ea.	415	135.50		550.50	
	Reinstall	Ea.		97.75		97.75	
	Clean	Ea.	1.43	29		30.43	
	Paint	Ea.	61.50	110		171.50	
	Minimum Charge	Job		269		269	
6'	Demolish	Ea.		37.50		37.50	Includes material and labor to install pair of 3' wide louvered wood bi-fold doors not including jamb, trim, track, and hardware.
	Install	Ea.	600	108		708	
	Demolish and Install	Ea.	600	145.50		745.50	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	1.64	33.50		35.14	
	Paint	Ea.	61.50	110		171.50	
	Minimum Charge	Job		269		269	

Finish Carpentry

Bifold Door		Unit	Material	Labor	Equip.	Total	Specification
8'							
	Demolish	Ea.		37.50		37.50	Includes material and labor to install pair of 4' wide louvered wood bi-fold doors not including jamb, trim, track, and hardware.
	Install	Ea.	1200	108		1308	
	Demolish and Install	Ea.	1200	145.50		1345.50	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	7.75	29		36.75	
	Paint	Ea.	32	110		142	
	Minimum Charge	Job		269		269	
Accordion Type							
	Demolish	S.F.		1.32		1.32	
	Install	Ea.	287	108		395	
	Demolish and Install	Ea.	287	109.32		396.32	Includes material and labor to install vinyl folding accordion closet doors, including track and frame.
	Reinstall	Ea.		107.52		107.52	
	Clean	S.F.		.55		.55	
	Minimum Charge	Job		269		269	
Casing Trim							
Single Width							
	Demolish	Ea.		9.50		9.50	Cost includes material and labor to install 1 1/16" x 2-1/2" pine ranch style casing for one side of a standard door opening.
	Install	Opng.	28	45		73	
	Demolish and Install	Opng.	28	54.50		82.50	
	Reinstall	Opng.		35.84		35.84	
	Clean	Opng.	.46	4.05		4.51	
	Paint	Ea.	11.20	8.80		20	
	Minimum Charge	Job		269		269	
Double Width							
	Demolish	Ea.		11.25		11.25	
	Install	Opng.	33	54		87	
	Demolish and Install	Opng.	33	65.25		98.25	Cost includes material and labor to install 1 1/16" x 2-1/2" pine ranch style door casing for one side of a double door opening.
	Reinstall	Opng.		43.01		43.01	
	Clean	Opng.	.55	8.10		8.65	
	Paint	Ea.	11.20	10		21.20	
	Minimum Charge	Job		269		269	
Jamb							
	Demolish	Ea.		37.50		37.50	Includes material and labor to install flat pine jamb with square cut heads and rabbeted sides for 6' 8" high and 3-9/16" door including trim sets for both sides.
	Install	Ea.	157	14.55		171.55	
	Demolish and Install	Ea.	157	52.05		209.05	
	Clean	Ea.	.10	10.10		10.20	
	Paint	Ea.	15.80	29.50		45.30	
	Minimum Charge	Job		134		134	
Stain							
	Install	Ea.	17.35	36.50		53.85	Includes labor and material to stain single door and trim on both sides.
	Minimum Charge	Job		220		220	
Shave & Refit							
	Install	Ea.		45		45	Includes labor to shave and rework door to fit opening at the job site.
	Minimum Charge	Job		134		134	

Finish Carpentry

Louver Door		Unit	Material	Labor	Equip.	Total	Specification
Full							
2' x 6' 8"							
	Demolish	Ea.		10.65		10.65	Cost includes material and labor to install 2' x 6' 8" pine full louver door, jamb, hinges.
	Install	Ea.	400	54		454	
	Demolish and Install	Ea.	400	64.65		464.65	
	Reinstall	Ea.		53.76		53.76	
	Clean	Ea.	6.05	50.50		56.55	
	Paint	Ea.	16.70	63		79.70	
	Minimum Charge	Job		269		269	
2' 8" x 6' 8"							
	Demolish	Ea.		10.65		10.65	Cost includes material and labor to install 2' 8" x 6' 8" pine full louver door, jamb, hinges.
	Install	Ea.	460	54		514	
	Demolish and Install	Ea.	460	64.65		524.65	
	Reinstall	Ea.		53.76		53.76	
	Clean	Ea.	6.05	50.50		56.55	
	Paint	Ea.	16.70	63		79.70	
	Minimum Charge	Job		269		269	
3' x 6' 8"							
	Demolish	Ea.		10.65		10.65	Cost includes material and labor to install 3' x 6' 8" pine full louver door, jamb, hinges.
	Install	Ea.	495	56.50		551.50	
	Demolish and Install	Ea.	495	67.15		562.15	
	Reinstall	Ea.		56.59		56.59	
	Clean	Ea.	6.05	50.50		56.55	
	Paint	Ea.	16.70	63		79.70	
	Minimum Charge	Job		269		269	
Half							
2' x 6' 8"							
	Demolish	Ea.		10.65		10.65	Cost includes material and labor to install 2' x 6' 8" pine half louver door, jamb, hinges.
	Install	Ea.	490	54		544	
	Demolish and Install	Ea.	490	64.65		554.65	
	Reinstall	Ea.		53.76		53.76	
	Clean	Ea.	6.05	50.50		56.55	
	Paint	Ea.	16.70	63		79.70	
	Minimum Charge	Job		269		269	
2' 8" x 6' 8"							
	Demolish	Ea.		10.65		10.65	Cost includes material and labor to install 2' 8" x 6' 8" pine half louver door, jamb, hinges.
	Install	Ea.	500	54		554	
	Demolish and Install	Ea.	500	64.65		564.65	
	Reinstall	Ea.		53.76		53.76	
	Clean	Ea.	6.05	50.50		56.55	
	Paint	Ea.	16.70	63		79.70	
	Minimum Charge	Job		269		269	
3' x 6' 8"							
	Demolish	Ea.		10.65		10.65	Cost includes material and labor to install 3' x 6' 8" pine half louver door, jamb, hinges.
	Install	Ea.	550	56.50		606.50	
	Demolish and Install	Ea.	550	67.15		617.15	
	Reinstall	Ea.		56.59		56.59	
	Clean	Ea.	6.05	50.50		56.55	
	Paint	Ea.	16.70	63		79.70	
	Minimum Charge	Job		269		269	
Jamb							
	Demolish	Ea.		37.50		37.50	Includes material and labor to install flat pine jamb with square cut heads and rabbeted sides for 6' 8" high and 3-9/16" door including trim sets for both sides.
	Install	Ea.	157	14.55		171.55	
	Demolish and Install	Ea.	157	52.05		209.05	
	Clean	Ea.	.10	10.10		10.20	
	Paint	Ea.	15.80	29.50		45.30	
	Minimum Charge	Job		134		134	

Finish Carpentry

Louver Door		Unit	Material	Labor	Equip.	Total	Specification
Stain	Install	Ea.	17.35	36.50		53.85	Includes labor and material to stain single door and trim on both sides.
	Minimum Charge	Job		220		220	
Shave & Refit	Install	Ea.		45		45	Includes labor to shave and rework door to fit opening at the job site.
	Minimum Charge	Job		220		220	

Bypass Sliding Door		Unit	Material	Labor	Equip.	Total	Specification
Wood	5'	Demolish	Ea.	50		50	Includes material and labor to install pair of 2' 6" wide luan hollow core wood bi-pass doors with jamb, track hardware.
		Install	Opng.	98		593	
		Demolish and Install	Opng.	148		643	
		Reinstall	Opng.	97.75		97.75	
	6'	Clean	Ea.	29		30.43	
		Paint	Ea.	110		171.50	
		Minimum Charge	Job	269		269	
		Demolish	Ea.	50		50	
	8'	Install	Opng.	108		638	
		Demolish and Install	Opng.	158		688	
		Reinstall	Opng.	107.52		107.52	
		Clean	Ea.	33.50		35.14	
	8'	Paint	Ea.	110		171.50	
		Minimum Charge	Job	269		269	
Mirrored	6'	Demolish	Ea.	50		50	Includes material and labor to install pair of 3' wide mirrored bi-pass doors with jamb, trim, track hardware.
		Install	Opng.	108		593	
		Demolish and Install	Opng.	158		643	
		Reinstall	Opng.	107.52		107.52	
	8'	Clean	Ea.	16.85		18.49	
		Minimum Charge	Job	269		269	
	8'	Demolish	Ea.	50		50	
		Install	Opng.	119		1099	
		Demolish and Install	Opng.	169		1149	
		Reinstall	Opng.	119.47		119.47	
	8'	Clean	Ea.	20		22.24	
		Minimum Charge	Job	269		269	

Finish Carpentry

Bypass Sliding Door		Unit	Material	Labor	Equip.	Total	Specification
Casing Trim							
Single Width							
	Demolish	Ea.		9.50		9.50	Cost includes material and labor to install 1 1/16" x 2-1/2" pine ranch style casing for one side of a standard door opening.
	Install	Opng.	28	45		73	
	Demolish and Install	Opng.	28	54.50		82.50	
	Reinstall	Opng.		35.84		35.84	
	Clean	Opng.	.46	4.05		4.51	
	Paint	Ea.	11.20	8.80		20	
	Minimum Charge	Job		269		269	
Double Width							
	Demolish	Ea.		11.25		11.25	Cost includes material and labor to install 1 1/16" x 2-1/2" pine ranch style door casing for one side of a double door opening.
	Install	Opng.	33	54		87	
	Demolish and Install	Opng.	33	65.25		98.25	
	Reinstall	Opng.		43.01		43.01	
	Clean	Opng.	.55	8.10		8.65	
	Paint	Ea.	11.20	10		21.20	
	Minimum Charge	Job		269		269	
Jamb							
	Demolish	Ea.		37.50		37.50	Includes material and labor to install flat pine jamb with square cut heads and rabbeted sides for 6' 8" high and 3-9/16" door including trim sets for both sides.
	Install	Ea.	157	14.55		171.55	
	Demolish and Install	Ea.	157	52.05		209.05	
	Clean	Ea.	.10	10.10		10.20	
	Paint	Ea.	15.80	29.50		45.30	
	Minimum Charge	Job		134		134	
Stain							
	Install	Ea.	17.35	36.50		53.85	Includes labor and material to stain single door and trim on both sides.
	Minimum Charge	Job		220		220	
Shave & Refit							
	Install	Ea.		45		45	Includes labor to shave and rework door to fit opening at the job site.
	Minimum Charge	Job		134		134	

Base Molding		Unit	Material	Labor	Equip.	Total	Specification
One Piece							
1-5/8"							
	Demolish	L.F.		.75		.75	Includes material and labor to install pine or birch base molding.
	Install	L.F.	1.46	1.59		3.05	
	Demolish and Install	L.F.	1.46	2.34		3.80	
	Reinstall	L.F.		1.27		1.27	
	Clean	L.F.	.02	.24		.26	
	Paint	L.F.	.11	.48		.59	
	Minimum Charge	Job		269		269	
2-1/2"							
	Demolish	L.F.		.75		.75	Cost includes material and labor to install 1/2" x 2-1/2" pine or birch base molding.
	Install	L.F.	1.49	1.62		3.11	
	Demolish and Install	L.F.	1.49	2.37		3.86	
	Reinstall	L.F.		1.30		1.30	
	Clean	L.F.	.02	.24		.26	
	Paint	L.F.	.11	.48		.59	
	Minimum Charge	Job		269		269	

Finish Carpentry

Base Molding		Unit	Material	Labor	Equip.	Total	Specification
3-1/2"							
	Demolish	L.F.		.75		.75	Cost includes material and labor to install 9/16" x 3-1/2" pine or birch base molding.
	Install	L.F.	.94	1.72		2.66	
	Demolish and Install	L.F.	.94	2.47		3.41	
	Reinstall	L.F.		1.38		1.38	
	Clean	L.F.	.02	.24		.26	
	Paint	L.F.	.18	.52		.70	
	Minimum Charge	Job		269		269	
6"							
	Demolish	L.F.		.75		.75	Cost includes material and labor to install 1" x 6" pine or birch base molding.
	Install	L.F.	2.30	1.72		4.02	
	Demolish and Install	L.F.	2.30	2.47		4.77	
	Reinstall	L.F.		1.38		1.38	
	Clean	L.F.	.03	.34		.37	
	Paint	L.F.	.19	.66		.85	
	Minimum Charge	Job		269		269	
8"							
	Demolish	L.F.		.90		.90	Cost includes material and labor to install 1" x 8" pine or birch base molding.
	Install	L.F.	3.14	1.72		4.86	
	Demolish and Install	L.F.	3.14	2.62		5.76	
	Reinstall	L.F.		1.38		1.38	
	Clean	L.F.	.03	.40		.43	
	Paint	L.F.	.20	.73		.93	
	Minimum Charge	Job		269		269	
Premium / Custom Grade							
	Demolish	L.F.		.90		.90	Includes material and labor to install custom 2 or 3 piece oak or other hardwood, stain grade trim.
	Install	L.F.	3.76	5.15		8.91	
	Demolish and Install	L.F.	3.76	6.05		9.81	
	Reinstall	L.F.		4.14		4.14	
	Clean	L.F.	.03	.40		.43	
	Paint	L.F.	.22	.73		.95	
	Minimum Charge	Job		269		269	
One Piece Oak							
1-5/8"							
	Demolish	L.F.		.75		.75	Cost includes material and labor to install 1/2" x 1-5/8" oak base molding.
	Install	L.F.	2.93	1.59		4.52	
	Demolish and Install	L.F.	2.93	2.34		5.27	
	Reinstall	L.F.		1.27		1.27	
	Clean	L.F.	.02	.24		.26	
	Paint	L.F.	.21	.65		.86	
	Minimum Charge	Job		269		269	
2-1/2"							
	Demolish	L.F.		.75		.75	Cost includes material and labor to install 1/2" x 2-1/2" oak base molding.
	Install	L.F.	2.63	1.62		4.25	
	Demolish and Install	L.F.	2.63	2.37		5	
	Reinstall	L.F.		1.30		1.30	
	Clean	L.F.	.02	.24		.26	
	Paint	L.F.	.22	.67		.89	
	Minimum Charge	Job		269		269	
3-1/2"							
	Demolish	L.F.		.75		.75	Cost includes material and labor to install 1/2" x 3-1/2" oak base molding.
	Install	L.F.	4.04	1.65		5.69	
	Demolish and Install	L.F.	4.04	2.40		6.44	
	Reinstall	L.F.		1.32		1.32	
	Clean	L.F.	.02	.24		.26	
	Paint	L.F.	.23	.68		.91	
	Minimum Charge	Job		269		269	

Finish Carpentry

Base Molding		Unit	Material	Labor	Equip.	Total	Specification
6"	Demolish	L.F.		.75		.75	Cost includes material and labor to install 1" x 6" oak base molding.
	Install	L.F.	2.20	1.72		3.92	
	Demolish and Install	L.F.	2.20	2.47		4.67	
	Reinstall	L.F.		1.38		1.38	
	Clean	L.F.	.03	.40		.43	
	Paint	L.F.	.23	.71		.94	
	Minimum Charge	Job		269		269	
8"	Demolish	L.F.		.90		.90	Cost includes material and labor to install 1" x 8" oak base molding.
	Install	L.F.	2.92	1.72		4.64	
	Demolish and Install	L.F.	2.92	2.62		5.54	
	Reinstall	L.F.		1.38		1.38	
	Clean	L.F.	.03	.40		.43	
	Paint	L.F.	.24	.73		.97	
	Minimum Charge	Job		269		269	
Vinyl Base Molding							
2-1/2"	Demolish	L.F.		.75		.75	Cost includes material and labor to install 2-1/2" vinyl or rubber cove base including adhesive.
	Install	L.F.	2.27	1.66		3.93	
	Demolish and Install	L.F.	2.27	2.41		4.68	
	Reinstall	L.F.		1.66		1.66	
	Clean	L.F.		.37		.37	
	Minimum Charge	Job		264		264	
4"	Demolish	L.F.		.75		.75	Cost includes material and labor to install 4" vinyl or rubber cove base including adhesive.
	Install	Ea.	4.86	1.66		6.52	
	Demolish and Install	Ea.	4.86	2.41		7.27	
	Reinstall	Ea.		1.66		1.66	
	Clean	L.F.		.37		.37	
	Minimum Charge	Job		264		264	
6"	Demolish	L.F.		.75		.75	Cost includes material and labor to install 6" vinyl or rubber cove base including adhesive.
	Install	L.F.	3.41	1.66		5.07	
	Demolish and Install	L.F.	3.41	2.41		5.82	
	Reinstall	L.F.		1.66		1.66	
	Clean	L.F.		.37		.37	
	Minimum Charge	Job		264		264	
Prefinished							
	Demolish	L.F.		.75		.75	Cost includes material and labor to install 9/16" x 3-5/16" prefinished base molding.
	Install	L.F.	5.70	1.72		7.42	
	Demolish and Install	L.F.	5.70	2.47		8.17	
	Reinstall	L.F.		1.38		1.38	
	Clean	L.F.	.02	.24		.26	
	Paint	L.F.	.18	.52		.70	
	Minimum Charge	Job		269		269	
Shoe							
	Demolish	L.F.		.75		.75	Includes material and labor to install pine or birch base molding.
	Install	L.F.	1.46	1.59		3.05	
	Demolish and Install	L.F.	1.46	2.34		3.80	
	Reinstall	L.F.		1.27		1.27	
	Clean	L.F.	.02	.24		.26	
	Paint	L.F.	.19	.71		.90	
	Minimum Charge	Job		269		269	

Finish Carpentry

Base Molding		Unit	Material	Labor	Equip.	Total	Specification
Carpeted							
	Demolish	L.F.		.30		.30	Includes material and labor to install carpet baseboard with adhesive.
	Install	L.F.	1.31	3.16		4.47	
	Demolish and Install	L.F.	1.31	3.46		4.77	
	Reinstall	L.F.		2.53		2.53	
	Clean	L.F.		.15		.15	
	Minimum Charge	Job		261		261	
Ceramic Tile							
	Demolish	L.F.		1.64		1.64	Includes material and labor to install thin set ceramic tile cove base including grout.
	Install	L.F.	3.97	7.25		11.22	
	Demolish and Install	L.F.	3.97	8.89		12.86	
	Clean	L.F.		.77		.77	
	Minimum Charge	Job		261		261	
Quarry Tile							
	Demolish	L.F.		1.64		1.64	Includes material and labor to install quarry tile base including grout.
	Install	L.F.	4.72	8.45		13.17	
	Demolish and Install	L.F.	4.72	10.09		14.81	
	Clean	L.F.		.77		.77	
	Minimum Charge	Job		261		261	
Caulk and Renail							
	Install	L.F.	.04	.84		.88	Includes labor and material to renail base and caulk where necessary.
	Minimum Charge	Job		269		269	

Molding		Unit	Material	Labor	Equip.	Total	Specification
Oak Base							
	Demolish	L.F.		.75		.75	Cost includes material and labor to install 1/2" x 2-1/2" oak base molding.
	Install	L.F.	2.63	1.62		4.25	
	Demolish and Install	L.F.	2.63	2.37		5	
	Reinstall	L.F.		1.30		1.30	
	Clean	L.F.	.02	.24		.26	
	Paint	L.F.	.22	.67		.89	
	Minimum Charge	Job		269		269	
Shoe							
	Demolish	L.F.		.75		.75	Includes material and labor to install pine or birch base molding.
	Install	L.F.	1.46	1.59		3.05	
	Demolish and Install	L.F.	1.46	2.34		3.80	
	Reinstall	L.F.		1.27		1.27	
	Clean	L.F.	.02	.24		.26	
	Paint	L.F.	.19	.71		.90	
	Minimum Charge	Job		269		269	
Quarter Round							
	Demolish	L.F.		.75		.75	Includes material and labor to install pine base quarter round molding.
	Install	L.F.	1.69	2.11		3.80	
	Demolish and Install	L.F.	1.69	2.86		4.55	
	Reinstall	L.F.		1.69		1.69	
	Clean	L.F.	.02	.24		.26	
	Paint	L.F.	.21	1.10		1.31	
	Minimum Charge	Job		269		269	
Chair Rail							
	Demolish	L.F.		.75		.75	Cost includes material and labor to install 5/8" x 2-1/2" oak chair rail molding.
	Install	L.F.	1.21	1.99		3.20	
	Demolish and Install	L.F.	1.21	2.74		3.95	
	Reinstall	L.F.		1.59		1.59	
	Clean	L.F.	.02	.24		.26	
	Paint	L.F.	.21	1.10		1.31	
	Minimum Charge	Job		269		269	

Finish Carpentry

Molding		Unit	Material	Labor	Equip.	Total	Specification
Crown	Demolish	L.F.		.75		.75	Includes material and labor to install unfinished pine crown molding.
	Install	L.F.	1.72	2.15		3.87	
	Demolish and Install	L.F.	1.72	2.90		4.62	
	Reinstall	L.F.		1.72		1.72	
	Clean	L.F.	.03	.31		.34	
	Paint	L.F.	.21	1.10		1.31	
	Minimum Charge	Job		269		269	
Cove	Demolish	L.F.		.75		.75	Cost includes material and labor to install 1 1/16" x 2-3/4" pine cove molding.
	Install	L.F.	2.99	2.03		5.02	
	Demolish and Install	L.F.	2.99	2.78		5.77	
	Reinstall	L.F.		1.62		1.62	
	Clean	L.F.	.02	.24		.26	
	Paint	L.F.	.21	1.10		1.31	
	Minimum Charge	Job		269		269	
Corner	Demolish	L.F.		.75		.75	Includes material and labor to install inside or outside pine corner molding.
	Install	L.F.	1.45	.84		2.29	
	Demolish and Install	L.F.	1.45	1.59		3.04	
	Reinstall	L.F.		.67		.67	
	Clean	L.F.	.02	.24		.26	
	Paint	L.F.	.21	1.10		1.31	
	Minimum Charge	Job		269		269	
Picture	Demolish	L.F.		.75		.75	Cost includes material and labor to install 9/16" x 2-1/2" pine casing.
	Install	L.F.	1.65	2.24		3.89	
	Demolish and Install	L.F.	1.65	2.99		4.64	
	Reinstall	L.F.		1.79		1.79	
	Clean	L.F.	.02	.24		.26	
	Paint	L.F.	.21	1.10		1.31	
	Minimum Charge	Job		269		269	
Single Cased Opening	Demolish	Ea.		37.50		37.50	Includes material and labor to install flat pine jamb with square cut heads and rabbeted sides for 6' 8" high opening including trim sets for both sides.
	Install	Ea.	107	33.50		140.50	
	Demolish and Install	Ea.	107	71		178	
	Clean	Ea.	.23	8.45		8.68	
	Paint	Ea.	2.67	11		13.67	
	Minimum Charge	Job		269		269	
Double Cased Opening	Demolish	Ea.		37.50		37.50	Includes material and labor to install flat pine jamb with square cut heads and rabbeted sides for 6' 8" high opening including trim sets for both sides.
	Install	Ea.	125	38.50		163.50	
	Demolish and Install	Ea.	125	76		201	
	Clean	Ea.	.26	9.85		10.11	
	Paint	Ea.	3.10	12.95		16.05	
	Minimum Charge	Job		269		269	

Window Trim Set		Unit	Material	Labor	Equip.	Total	Specification
Single	Demolish	Ea.		10		10	Cost includes material and labor to install 1 1/16" x 2-1/2" pine ranch style window casing.
	Install	Opng.	69	54		123	
	Demolish and Install	Opng.	69	64		133	
	Reinstall	Opng.		43.01		43.01	
	Clean	Ea.	.33	5.80		6.13	
	Paint	Ea.	2.51	10.50		13.01	
	Minimum Charge	Job		269		269	

Finish Carpentry

Window Trim Set		Unit	Material	Labor	Equip.	Total	Specification
Double	Demolish	Ea.		11.25		11.25	Cost includes material and labor to install 1 1/16" x 2-1/2" pine ranch style trim for casing one side of a double window opening.
	Install	Ea.	132	67		199	
	Demolish and Install	Ea.	132	78.25		210.25	
	Reinstall	Ea.		53.76		53.76	
	Clean	Ea.	.58	6.75		7.33	
	Paint	Ea.	4.20	17.65		21.85	
	Minimum Charge	Job		269		269	
Triple	Demolish	Ea.		12.85		12.85	Cost includes material and labor to install 1 1/16" x 2-1/2" pine ranch style trim for casing one side of a triple window opening.
	Install	Opng.	128	89.50		217.50	
	Demolish and Install	Opng.	128	102.35		230.35	
	Reinstall	Opng.		71.68		71.68	
	Clean	Ea.	.81	8.10		8.91	
	Paint	Ea.	5.90	24.50		30.40	
	Minimum Charge	Job		269		269	
Window Casing Per L.F.							
	Demolish	L.F.		.75		.75	Cost includes material and labor to install 1 1/16" x 2-1/2" pine ranch style trim for casing.
	Install	L.F.	1.68	2.15		3.83	
	Demolish and Install	L.F.	1.68	2.90		4.58	
	Reinstall	L.F.		1.72		1.72	
	Clean	L.F.	.02	.24		.26	
	Paint	L.F.	.21	1.10		1.31	
	Minimum Charge	Job		269		269	

Window Sill		Unit	Material	Labor	Equip.	Total	Specification
Wood	Demolish	L.F.		.75		.75	Includes material and labor to install flat, wood window stool.
	Install	L.F.	4.29	2.69		6.98	
	Demolish and Install	L.F.	4.29	3.44		7.73	
	Reinstall	L.F.		2.15		2.15	
	Clean	L.F.	.02	.24		.26	
	Paint	L.F.	.21	1.10		1.31	
	Minimum Charge	Job		269		269	
Marble	Demolish	L.F.		1.12		1.12	Includes material and labor to install marble window sills, 6" x 3/4" thick.
	Install	L.F.	24	11.55		35.55	
	Demolish and Install	L.F.	24	12.67		36.67	
	Reinstall	L.F.		9.22		9.22	
	Clean	L.F.	.02	.24		.26	
	Minimum Charge	Job		261		261	

Shelving		Unit	Material	Labor	Equip.	Total	Specification
Pine 18"	Demolish	L.F.		1.29		1.29	Cost includes material and labor to install 1" thick custom shelving board 18" wide.
	Install	L.F.	5.50	5.65		11.15	
	Demolish and Install	L.F.	5.50	6.94		12.44	
	Reinstall	L.F.		4.53		4.53	
	Clean	L.F.	.04	.67		.71	
	Paint	L.F.	2.72	.69		3.41	
	Minimum Charge	Job		269		269	

Finish Carpentry

Shelving		Unit	Material	Labor	Equip.	Total	Specification
24"							
	Demolish	L.F.		1.29		1.29	Cost includes material and labor to install 1" thick custom shelving board.
	Install	L.F.	7.30	6.30		13.60	
	Demolish and Install	L.F.	7.30	7.59		14.89	
	Reinstall	L.F.		5.06		5.06	
	Clean	L.F.	.07	1.01		1.08	
	Paint	L.F.	3.69	.93		4.62	
	Minimum Charge	Job		269		269	
Particle Board							
	Demolish	L.F.		1.18		1.18	Cost includes material and labor to install 3/4" thick particle shelving board 18" wide.
	Install	L.F.	1.95	2.83		4.78	
	Demolish and Install	L.F.	1.95	4.01		5.96	
	Reinstall	L.F.		2.26		2.26	
	Clean	L.F.	.04	.67		.71	
	Paint	S.F.	.23	1.03		1.26	
	Minimum Charge	Job		269		269	
Plywood							
	Demolish	L.F.		1.18		1.18	Cost includes material and labor to install 3/4" thick plywood shelving board.
	Install	L.F.	1.12	8.25		9.37	
	Demolish and Install	L.F.	1.12	9.43		10.55	
	Reinstall	L.F.		6.62		6.62	
	Clean	L.F.	.04	.67		.71	
	Paint	S.F.	.23	1.03		1.26	
	Minimum Charge	Job		269		269	
Hardwood (oak)							
	Demolish	L.F.		1.18		1.18	Includes material and labor to install oak shelving, 1" x 12", incl. cleats and bracing.
	Install	L.F.	9.70	3.71		13.41	
	Demolish and Install	L.F.	9.70	4.89		14.59	
	Reinstall	L.F.		2.97		2.97	
	Clean	L.F.	.04	.67		.71	
	Paint	S.F.	.23	1.03		1.26	
	Minimum Charge	Job		269		269	
Custom Bookcase							
	Demolish	L.F.		15		15	Includes material and labor to install custom modular bookcase unit with clear pine faced frames, shelves 12" O.C., 7' high, 8" deep.
	Install	L.F.	28	54		82	
	Demolish and Install	L.F.	28	69		97	
	Reinstall	L.F.		43.01		43.01	
	Clean	L.F.	1.31	14.45		15.76	
	Paint	L.F.	3.70	34		37.70	
	Minimum Charge	Job		269		269	
Glass							
	Demolish	L.F.		1.18		1.18	Includes material and labor to install glass shelving, 1" x 12", incl. cleats and bracing.
	Install	L.F.	61	3.71		64.71	
	Demolish and Install	L.F.	61	4.89		65.89	
	Reinstall	L.F.		2.97		2.97	
	Clean	L.F.	.06	.62		.68	
	Minimum Charge	Job		261		261	

Closet Shelving		Unit	Material	Labor	Equip.	Total	Specification
Closet Shelf and Rod							
	Demolish	L.F.		1.18		1.18	Cost includes material and labor to install 1" thick custom shelving board 18" wide and 1" diameter clothes pole with brackets 3' O.C.
	Install	L.F.	6.50	8.95		15.45	
	Demolish and Install	L.F.	6.50	10.13		16.63	
	Reinstall	L.F.		7.17		7.17	
	Clean	L.F.	.03	.51		.54	
	Paint	L.F.	.42	1.10		1.52	
	Minimum Charge	Job		269		269	

Finish Carpentry


Closet Shelving		Unit	Material	Labor	Equip.	Total	Specification
Clothing Rod							
	Demolish	L.F.		.78		.78	Includes material and labor to install fir closet pole, 1-5/8" diameter.
	Install	L.F.	3.48	2.69		6.17	
	Demolish and Install	L.F.	3.48	3.47		6.95	
	Reinstall	L.F.		2.15		2.15	
	Clean	L.F.	.03	.70		.73	
	Paint	L.F.	3.05	1.26		4.31	
	Minimum Charge	Job		269		269	
Stair Assemblies		Unit	Material	Labor	Equip.	Total	Specification
Straight Hardwood							
	Demolish	Ea.		530		530	Includes material and labor to install factory cut and assembled straight closed box stairs with oak treads and prefinished stair rail with balusters.
	Install	Flight	480	360		840	
	Demolish and Install	Flight	480	890		1370	
	Clean	Flight	3.27	35		38.27	
	Paint	Flight	38	59		97	
	Minimum Charge	Job		269		269	
Clear Oak Tread							
	Demolish	Ea.		13.60		13.60	Includes material and labor to install 1-1/4" thick clear oak treads per riser.
	Install	Ea.	94	30		124	
	Demolish and Install	Ea.	94	43.60		137.60	
	Clean	Ea.	.10	3.48		3.58	
	Paint	Ea.	1.27	3.27		4.54	
	Minimum Charge	Job		269		269	
Landing							
	Demolish	S.F.		4.69		4.69	Includes material and labor to install clear oak landing.
	Install	S.F.	4.72	30		34.72	
	Demolish and Install	S.F.	4.72	34.69		39.41	
	Clean	S.F.		.51		.51	
	Paint	S.F.	1.03	1.09		2.12	
	Minimum Charge	Job		269		269	
Refinish / Stain							
	Install	S.F.	.37	3.11		3.48	Includes labor and material to refinish wood floor.
	Minimum Charge	Job		220		220	
Spiral Hardwood							
	Demolish	Ea.		530		530	Cost includes material and labor to install 4' - 6' diameter spiral stairs with oak treads, factory cut and assembled with double handrails.
	Install	Flight	3200	715		3915	
	Demolish and Install	Flight	3200	1245		4445	
	Clean	Flight	3.27	35		38.27	
	Paint	Flight	38	59		97	
	Minimum Charge	Job		269		269	

Stairs		Unit	Material	Labor	Equip.	Total	Specification
Disappearing							
	Demolish	Ea.		28		28	Includes material and labor to install a folding staircase.
	Install	Ea.	320	154		474	
	Demolish and Install	Ea.	320	182		502	
	Reinstall	Ea.		122.88		122.88	
	Clean	Ea.	.50	25.50		26	
	Minimum Charge	Job		269		269	

Finish Carpentry

Stair Components		Unit	Material	Labor	Equip.	Total	Specification
Handrail w / Balusters							
	Demolish	L.F.		3.75		3.75	Includes material and labor to install prefinished assembled stair rail with brackets, turned balusters and newel.
	Install	L.F.	65	11.20		76.20	
	Demolish and Install	L.F.	65	14.95		79.95	
	Clean	L.F.	.65	2.79		3.44	
	Paint	L.F.	5.30	5.20		10.50	
	Minimum Charge	Job		269		269	
Bannister							
	Demolish	L.F.		3.75		3.75	Includes material and labor to install built-up oak railings.
	Install	L.F.	17.05	8.95		26	
	Demolish and Install	L.F.	17.05	12.70		29.75	
	Clean	L.F.	.65	2.53		3.18	
	Paint	L.F.	5.30	4.01		9.31	
	Minimum Charge	Job		269		269	

Cabinets and Countertops

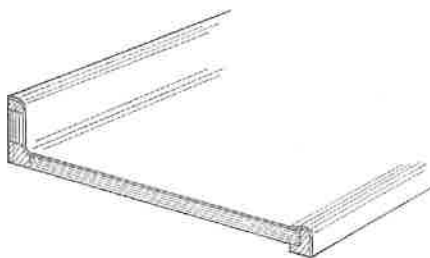

Wall and Base Cabinets

Countertop

Wall Cabinets		Unit	Material	Labor	Equip.	Total	Specification	
Good Grade Laminated								
12" Wide, 1 Door								
	Demolish	Ea.		11.25		11.25	Includes material and labor to install good modular unit with melamine laminated to particle board, in textured colors or wood grain print finish, hinges and pulls.	
	Install	Ea.	180	49		229		
	Demolish and Install	Ea.	180	60.25		240.25		
	Reinstall	Ea.		39.10		39.10		
	Clean	Ea.	.50	7.80		8.30		
	Paint	Ea.	1.58	15.75		17.33		
	Minimum Charge	Job		269		269		
15" Wide, 1 Door								
	Demolish	Ea.		14.05		14.05		
	Install	Ea.	196	50		246		
	Demolish and Install	Ea.	196	64.05		260.05		
	Reinstall	Ea.		40.19		40.19		
	Clean	Ea.	.62	9.65		10.27		
	Paint	Ea.	1.98	20		21.98		
	Minimum Charge	Job		269		269		
18" Wide, 1 Door								
	Demolish	Ea.		16.95		16.95		
	Install	Ea.	243	51.50		294.50		
	Demolish and Install	Ea.	243	68.45		311.45		
	Reinstall	Ea.		41.16		41.16		
	Clean	Ea.	.74	11.55		12.29		
	Paint	Ea.	2.37	23		25.37		
	Minimum Charge	Job		269		269		
21" Wide, 1 Door								
	Demolish	Ea.		19.55		19.55		
	Install	Ea.	162	52		214		
	Demolish and Install	Ea.	162	71.55		233.55		
	Reinstall	Ea.		41.76		41.76		
	Clean	Ea.	.86	13.50		14.36		
	Paint	Ea.	2.77	27.50		30.27		
	Minimum Charge	Job		269		269		
24" w / Blind Corner								
	Demolish	Ea.		22.50		22.50		
	Install	Ea.	330	53		383		
	Demolish and Install	Ea.	330	75.50		405.50		
	Reinstall	Ea.		42.37		42.37		
	Clean	Ea.	.98	15.55		16.53		
	Paint	Ea.	3.16	31.50		34.66		
	Minimum Charge	Job		269		269		

Cabinets and Countertops

Wall Cabinets		Unit	Material	Labor	Equip.	Total	Specification
27" Wide, 2 Door							
	Demolish	Ea.		25		25	Includes material and labor to install good modular unit with melamine laminated to particle board, in textured colors or wood grain print finish, hinges and pulls.
	Install	Ea.	101	54.50		155.50	
	Demolish and Install	Ea.	101	79.50		180.50	
	Reinstall	Ea.		43.44		43.44	
	Clean	Ea.	1.10	17.60		18.70	
	Paint	Ea.	3.59	36.50		40.09	
	Minimum Charge	Job		269		269	
30" Wide, 2 Door							
	Demolish	Ea.		28		28	Includes material and labor to install good modular unit with melamine laminated to particle board, in textured colors or wood grain print finish, hinges and pulls.
	Install	Ea.	375	55.50		430.50	
	Demolish and Install	Ea.	375	83.50		458.50	
	Reinstall	Ea.		44.57		44.57	
	Clean	Ea.	1.22	19.30		20.52	
	Paint	Ea.	3.97	40		43.97	
	Minimum Charge	Job		269		269	
36" Wide, 2 Door							
	Demolish	Ea.		33.50		33.50	Includes material and labor to install good modular unit with melamine laminated to particle board, in textured colors or wood grain print finish, hinges and pulls.
	Install	Ea.	390	57		447	
	Demolish and Install	Ea.	390	90.50		480.50	
	Reinstall	Ea.		45.75		45.75	
	Clean	Ea.	1.47	24		25.47	
	Paint	Ea.	4.80	49		53.80	
	Minimum Charge	Job		269		269	
48" Wide, 2 Door							
	Demolish	Ea.		45		45	Includes material and labor to install good modular unit with melamine laminated to particle board, in textured colors or wood grain print finish, hinges and pulls.
	Install	Ea.	405	58.50		463.50	
	Demolish and Install	Ea.	405	103.50		508.50	
	Reinstall	Ea.		46.75		46.75	
	Clean	Ea.	1.96	31		32.96	
	Paint	Ea.	6.40	63		69.40	
	Minimum Charge	Job		269		269	
Above-Appliance							
	Demolish	Ea.		28		28	Includes material and labor to install good modular unit with melamine laminated to particle board, in textured colors or wood grain print finish, hinges and pulls.
	Install	Ea.	151	43.50		194.50	
	Demolish and Install	Ea.	151	71.50		222.50	
	Reinstall	Ea.		34.68		34.68	
	Clean	Ea.	1.22	19.30		20.52	
	Paint	Ea.	3.97	40		43.97	
	Minimum Charge	Job		269		269	
Better Grade Wood							
12" Wide, 1 Door							
	Demolish	Ea.		11.25		11.25	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	241	49		290	
	Demolish and Install	Ea.	241	60.25		301.25	
	Reinstall	Ea.		39.10		39.10	
	Clean	Ea.	.50	7.80		8.30	
	Paint	Ea.	1.58	16.95		18.53	
	Minimum Charge	Job		269		269	
15" Wide, 1 Door							
	Demolish	Ea.		14.05		14.05	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	261	50		311	
	Demolish and Install	Ea.	261	64.05		325.05	
	Reinstall	Ea.		40.19		40.19	
	Clean	Ea.	.62	9.65		10.27	
	Paint	Ea.	1.98	21		22.98	
	Minimum Charge	Job		269		269	

Cabinets and Countertops

Wall Cabinets		Unit	Material	Labor	Equip.	Total	Specification
18" Wide, 1 Door							
	Demolish	Ea.		16.95		16.95	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	325	51.50		376.50	
	Demolish and Install	Ea.	325	68.45		393.45	
	Reinstall	Ea.		41.16		41.16	
	Clean	Ea.	.74	11.55		12.29	
	Paint	Ea.	2.37	26		28.37	
	Minimum Charge	Job		269		269	
21" Wide, 1 Door							
	Demolish	Ea.		19.55		19.55	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	216	52		268	
	Demolish and Install	Ea.	216	71.55		287.55	
	Reinstall	Ea.		41.76		41.76	
	Clean	Ea.	.86	13.50		14.36	
	Paint	Ea.	2.77	29.50		32.27	
	Minimum Charge	Job		269		269	
24" w / Blind Corner							
	Demolish	Ea.		22.50		22.50	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	440	53		493	
	Demolish and Install	Ea.	440	75.50		515.50	
	Reinstall	Ea.		42.37		42.37	
	Clean	Ea.	.98	15.55		16.53	
	Paint	Ea.	3.16	34		37.16	
	Minimum Charge	Job		269		269	
27" Wide, 2 Door							
	Demolish	Ea.		25		25	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	134	54.50		188.50	
	Demolish and Install	Ea.	134	79.50		213.50	
	Reinstall	Ea.		43.44		43.44	
	Clean	Ea.	1.10	17.60		18.70	
	Paint	Ea.	3.59	36.50		40.09	
	Minimum Charge	Job		269		269	
30" Wide, 2 Door							
	Demolish	Ea.		28		28	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	500	55.50		555.50	
	Demolish and Install	Ea.	500	83.50		583.50	
	Reinstall	Ea.		44.57		44.57	
	Clean	Ea.	1.22	19.30		20.52	
	Paint	Ea.	3.97	44		47.97	
	Minimum Charge	Job		269		269	
36" Wide, 2 Door							
	Demolish	Ea.		33.50		33.50	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	515	57		572	
	Demolish and Install	Ea.	515	90.50		605.50	
	Reinstall	Ea.		45.75		45.75	
	Clean	Ea.	1.47	24		25.47	
	Paint	Ea.	4.80	49		53.80	
	Minimum Charge	Job		269		269	
48" Wide, 2 Door							
	Demolish	Ea.		45		45	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	540	58.50		598.50	
	Demolish and Install	Ea.	540	103.50		643.50	
	Reinstall	Ea.		46.75		46.75	
	Clean	Ea.	1.96	31		32.96	
	Paint	Ea.	6.40	63		69.40	
	Minimum Charge	Job		269		269	

Cabinets and Countertops

Wall Cabinets		Unit	Material	Labor	Equip.	Total	Specification
Above-appliance							
	Demolish	Ea.		28		28	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	200	43.50		243.50	
	Demolish and Install	Ea.	200	71.50		271.50	
	Reinstall	Ea.		34.68		34.68	
	Clean	Ea.	1.22	19.30		20.52	
	Paint	Ea.	3.97	44		47.97	
	Minimum Charge	Job		269		269	
Premium Grade Wood							
12" Wide, 1 Door							
	Demolish	Ea.		11.25		11.25	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	288	49		337	
	Demolish and Install	Ea.	288	60.25		348.25	
	Reinstall	Ea.		39.10		39.10	
	Clean	Ea.	.50	7.80		8.30	
	Paint	Ea.	1.58	18.35		19.93	
	Minimum Charge	Job		269		269	
15" Wide, 1 Door							
	Demolish	Ea.		14.05		14.05	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	345	50		395	
	Demolish and Install	Ea.	345	64.05		409.05	
	Reinstall	Ea.		40.19		40.19	
	Clean	Ea.	.62	9.65		10.27	
	Paint	Ea.	1.98	23		24.98	
	Minimum Charge	Job		269		269	
18" Wide, 1 Door							
	Demolish	Ea.		16.95		16.95	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	390	51.50		441.50	
	Demolish and Install	Ea.	390	68.45		458.45	
	Reinstall	Ea.		41.16		41.16	
	Clean	Ea.	.74	11.55		12.29	
	Paint	Ea.	2.37	27.50		29.87	
	Minimum Charge	Job		269		269	
21" Wide, 1 Door							
	Demolish	Ea.		19.55		19.55	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	260	52		312	
	Demolish and Install	Ea.	260	71.55		331.55	
	Reinstall	Ea.		41.76		41.76	
	Clean	Ea.	.86	13.50		14.36	
	Paint	Ea.	2.77	31.50		34.27	
	Minimum Charge	Job		269		269	
24" w / Blind Corner							
	Demolish	Ea.		22.50		22.50	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	530	53		583	
	Demolish and Install	Ea.	530	75.50		605.50	
	Reinstall	Ea.		42.37		42.37	
	Clean	Ea.	.98	15.55		16.53	
	Paint	Ea.	3.16	36.50		39.66	
	Minimum Charge	Job		269		269	
27" Wide, 2 Door							
	Demolish	Ea.		25		25	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	395	54.50		449.50	
	Demolish and Install	Ea.	395	79.50		474.50	
	Reinstall	Ea.		43.44		43.44	
	Clean	Ea.	1.10	17.60		18.70	
	Paint	Ea.	3.59	40		43.59	
	Minimum Charge	Job		269		269	

Cabinets and Countertops

Wall Cabinets		Unit	Material	Labor	Equip.	Total	Specification
30" Wide, 2 Door							
	Demolish	Ea.		28		28	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	600	55.50		655.50	
	Demolish and Install	Ea.	600	83.50		683.50	
	Reinstall	Ea.		44.57		44.57	
	Clean	Ea.	1.22	19.30		20.52	
	Paint	Ea.	3.97	44		47.97	
	Minimum Charge	Job		269		269	
36" Wide, 2 Door							
	Demolish	Ea.		33.50		33.50	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	620	57		677	
	Demolish and Install	Ea.	620	90.50		710.50	
	Reinstall	Ea.		45.75		45.75	
	Clean	Ea.	1.47	24		25.47	
	Paint	Ea.	4.80	55		59.80	
	Minimum Charge	Job		269		269	
48" Wide, 2 Door							
	Demolish	Ea.		45		45	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	650	58.50		708.50	
	Demolish and Install	Ea.	650	103.50		753.50	
	Reinstall	Ea.		46.75		46.75	
	Clean	Ea.	1.96	31		32.96	
	Paint	Ea.	6.40	73.50		79.90	
	Minimum Charge	Job		269		269	
Above-appliance							
	Demolish	Ea.		28		28	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges, pulls.
	Install	Ea.	241	43.50		284.50	
	Demolish and Install	Ea.	241	71.50		312.50	
	Reinstall	Ea.		34.68		34.68	
	Clean	Ea.	1.22	19.30		20.52	
	Paint	Ea.	3.97	44		47.97	
	Minimum Charge	Job		269		269	
Premium Hardwood							
12" Wide, 1 Door							
	Demolish	Ea.		11.25		11.25	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges, pulls, laminated interior.
	Install	Ea.	315	49		364	
	Demolish and Install	Ea.	315	60.25		375.25	
	Reinstall	Ea.		39.10		39.10	
	Clean	Ea.	.50	7.80		8.30	
	Paint	Ea.	1.58	20		21.58	
	Minimum Charge	Job		269		269	
15" Wide, 1 Door							
	Demolish	Ea.		14.05		14.05	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges, pulls, laminated interior.
	Install	Ea.	455	50		505	
	Demolish and Install	Ea.	455	64.05		519.05	
	Reinstall	Ea.		40.19		40.19	
	Clean	Ea.	.62	9.65		10.27	
	Paint	Ea.	1.98	24.50		26.48	
	Minimum Charge	Job		269		269	
18" Wide, 1 Door							
	Demolish	Ea.		16.95		16.95	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges, pulls, laminated interior.
	Install	Ea.	425	51.50		476.50	
	Demolish and Install	Ea.	425	68.45		493.45	
	Reinstall	Ea.		41.16		41.16	
	Clean	Ea.	.74	11.55		12.29	
	Paint	Ea.	2.37	29.50		31.87	
	Minimum Charge	Job		269		269	

Cabinets and Countertops

Wall Cabinets		Unit	Material	Labor	Equip.	Total	Specification
21" Wide, 1 Door							
	Demolish	Ea.		19.55		19.55	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges, pulls, laminated interior.
	Install	Ea.	283	52		335	
	Demolish and Install	Ea.	283	71.55		354.55	
	Reinstall	Ea.		41.76		41.76	
	Clean	Ea.	.86	13.50		14.36	
	Paint	Ea.	2.77	34		36.77	
	Minimum Charge	Job		269		269	
24" w / Blind Corner							
	Demolish	Ea.		22.50		22.50	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges, pulls, laminated interior.
	Install	Ea.	580	53		633	
	Demolish and Install	Ea.	580	75.50		655.50	
	Reinstall	Ea.		42.37		42.37	
	Clean	Ea.	.98	15.55		16.53	
	Paint	Ea.	3.16	40		43.16	
	Minimum Charge	Job		269		269	
27" Wide, 2 Door							
	Demolish	Ea.		25		25	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges, pulls, laminated interior.
	Install	Ea.	176	54.50		230.50	
	Demolish and Install	Ea.	176	79.50		255.50	
	Reinstall	Ea.		43.44		43.44	
	Clean	Ea.	1.10	17.60		18.70	
	Paint	Ea.	3.59	44		47.59	
	Minimum Charge	Job		269		269	
30" Wide, 2 Door							
	Demolish	Ea.		28		28	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges, pulls, laminated interior.
	Install	Ea.	655	55.50		710.50	
	Demolish and Install	Ea.	655	83.50		738.50	
	Reinstall	Ea.		44.57		44.57	
	Clean	Ea.	1.22	19.30		20.52	
	Paint	Ea.	3.97	49		52.97	
	Minimum Charge	Job		269		269	
36" Wide, 2 Door							
	Demolish	Ea.		33.50		33.50	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges, pulls, laminated interior.
	Install	Ea.	675	57		732	
	Demolish and Install	Ea.	675	90.50		765.50	
	Reinstall	Ea.		45.75		45.75	
	Clean	Ea.	1.47	24		25.47	
	Paint	Ea.	4.80	63		67.80	
	Minimum Charge	Job		269		269	
48" Wide, 2 Door							
	Demolish	Ea.		45		45	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges, pulls, laminated interior.
	Install	Ea.	705	58.50		763.50	
	Demolish and Install	Ea.	705	103.50		808.50	
	Reinstall	Ea.		46.75		46.75	
	Clean	Ea.	1.96	31		32.96	
	Paint	Ea.	6.40	73.50		79.90	
	Minimum Charge	Job		269		269	
Above-appliance							
	Demolish	Ea.		28		28	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges, pulls, laminated interior.
	Install	Ea.	263	43.50		306.50	
	Demolish and Install	Ea.	263	71.50		334.50	
	Reinstall	Ea.		34.68		34.68	
	Clean	Ea.	1.22	19.30		20.52	
	Paint	Ea.	3.97	49		52.97	
	Minimum Charge	Job		269		269	

Cabinets and Countertops

Wall Cabinets		Unit	Material	Labor	Equip.	Total	Specification
Medicine Cabinet							
Good Grade							
	Demolish	Ea.		18.75		18.75	Cost includes material and labor to install 14" x 18" recessed medicine cabinet with stainless steel frame, mirror. Light not included.
	Install	Ea.	335	38.50		373.50	
	Demolish and Install	Ea.	335	57.25		392.25	
	Reinstall	Ea.		30.72		30.72	
	Clean	Ea.	.02	20.50		20.52	
	Paint	Ea.	3.69	27.50		31.19	
	Minimum Charge	Job		269		269	
Good Grade Lighted							
	Demolish	Ea.		18.75		18.75	Cost includes material and labor to install 14" x 18" recessed medicine cabinet with stainless steel frame, mirror and light.
	Install	Ea.	365	45		410	
	Demolish and Install	Ea.	365	63.75		428.75	
	Reinstall	Ea.		35.84		35.84	
	Clean	Ea.	.02	20.50		20.52	
	Paint	Ea.	3.69	27.50		31.19	
	Minimum Charge	Job		269		269	
Better Grade							
	Demolish	Ea.		18.75		18.75	Includes material and labor to install recessed medicine cabinet with polished chrome frame and mirror. Light not included.
	Install	Ea.	605	38.50		643.50	
	Demolish and Install	Ea.	605	57.25		662.25	
	Reinstall	Ea.		30.72		30.72	
	Clean	Ea.	.02	20.50		20.52	
	Paint	Ea.	3.69	27.50		31.19	
	Minimum Charge	Job		269		269	
Better Grade Lighted							
	Demolish	Ea.		18.75		18.75	Includes material and labor to install recessed medicine cabinet with polished chrome frame, mirror and light.
	Install	Ea.	640	45		685	
	Demolish and Install	Ea.	640	63.75		703.75	
	Reinstall	Ea.		35.84		35.84	
	Clean	Ea.	.02	20.50		20.52	
	Paint	Ea.	3.69	27.50		31.19	
	Minimum Charge	Job		269		269	
Premium Grade							
	Demolish	Ea.		18.75		18.75	Cost includes material and labor to install 14" x 24" recessed medicine cabinet with beveled mirror, frameless swing door. Light not included.
	Install	Ea.	345	38.50		383.50	
	Demolish and Install	Ea.	345	57.25		402.25	
	Reinstall	Ea.		30.72		30.72	
	Clean	Ea.	.02	20.50		20.52	
	Paint	Ea.	3.69	27.50		31.19	
	Minimum Charge	Job		269		269	
Premium Grade Lighted							
	Demolish	Ea.		18.75		18.75	Cost includes material and labor to install 36" x 30" surface mounted medicine cabinet with beveled tri-view mirror, frameless swing door and light.
	Install	Ea.	375	45		420	
	Demolish and Install	Ea.	375	63.75		438.75	
	Reinstall	Ea.		35.84		35.84	
	Clean	Ea.	.02	20.50		20.52	
	Paint	Ea.	3.69	27.50		31.19	
	Minimum Charge	Job		269		269	
Bath Mirror							
	Demolish	Ea.		14.05		14.05	Cost includes material and labor to install 18" x 24" surface mount mirror with stainless steel frame.
	Install	Ea.	78	27		105	
	Demolish and Install	Ea.	78	41.05		119.05	
	Reinstall	Ea.		21.50		21.50	
	Clean	Ea.	.02	1.37		1.39	
	Minimum Charge	Job		269		269	

Cabinets and Countertops

Wall Cabinets		Unit	Material	Labor	Equip.	Total	Specification
Garage							
	Demolish	L.F.		11.25		11.25	Includes material and labor to install good modular unit with melamine laminated to particle board, in textured colors or wood grain print finish, hinges and pulls.
	Install	L.F.	111	27		138	
	Demolish and Install	L.F.	111	38.25		149.25	
	Reinstall	L.F.		21.50		21.50	
	Clean	L.F.	.50	7.80		8.30	
	Paint	L.F.	1.58	15.75		17.33	
	Minimum Charge	Job		269		269	
Strip and Refinish							
	Install	L.F.	8.05	55		63.05	Includes labor and material to strip, prep and refinish exterior of cabinets.
	Minimum Charge	Job		220		220	

Tall Cabinets		Unit	Material	Labor	Equip.	Total	Specification
Good Grade Laminated							
	Demolish	L.F.		20		20	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	L.F.	375	59.50		434.50	
	Demolish and Install	L.F.	375	79.50		454.50	
	Reinstall	L.F.		47.79		47.79	
	Clean	L.F.	1.31	14.45		15.76	
	Paint	L.F.	3.70	31.50		35.20	
	Minimum Charge	Job		269		269	
Better Grade Wood							
	Demolish	L.F.		20		20	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	L.F.	540	59.50		599.50	
	Demolish and Install	L.F.	540	79.50		619.50	
	Reinstall	L.F.		47.79		47.79	
	Clean	L.F.	1.31	14.45		15.76	
	Paint	L.F.	3.70	34		37.70	
	Minimum Charge	Job		269		269	
Premium Grade Wood							
	Demolish	L.F.		20		20	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	L.F.	770	59.50		829.50	
	Demolish and Install	L.F.	770	79.50		849.50	
	Reinstall	L.F.		47.79		47.79	
	Clean	L.F.	1.31	14.45		15.76	
	Paint	L.F.	3.70	36.50		40.20	
	Minimum Charge	Job		269		269	
Premium Hardwood							
	Demolish	L.F.		20		20	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges and pulls, laminated interior.
	Install	L.F.	1075	59.50		1134.50	
	Demolish and Install	L.F.	1075	79.50		1154.50	
	Reinstall	L.F.		47.79		47.79	
	Clean	L.F.	1.31	14.45		15.76	
	Paint	L.F.	3.70	40		43.70	
	Minimum Charge	Job		269		269	

Cabinets and Countertops

Tall Cabinets		Unit	Material	Labor	Equip.	Total	Specification
Single Oven, 27" Wide							
Good Grade Laminated							
	Demolish	Ea.		45		45	Includes material and labor to install good modular unit with melamine laminated to particle board, in textured colors or wood grain print finish, hinges and pulls.
	Install	Ea.	1300	134		1434	
	Demolish and Install	Ea.	1300	179		1479	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	4.09	25.50		29.59	
	Paint	Ea.	6.20	70.50		76.70	
	Minimum Charge	Job		269		269	
Better Grade Veneer							
	Demolish	Ea.		45		45	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	2300	134		2434	
	Demolish and Install	Ea.	2300	179		2479	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	4.09	25.50		29.59	
	Paint	Ea.	6.20	76		82.20	
	Minimum Charge	Job		269		269	
Premium Grade Veneer							
	Demolish	Ea.		45		45	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	2100	134		2234	
	Demolish and Install	Ea.	2100	179		2279	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	4.09	25.50		29.59	
	Paint	Ea.	6.20	83		89.20	
	Minimum Charge	Job		269		269	
Premium Hardwood							
	Demolish	Ea.		45		45	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges and pulls, laminated interior.
	Install	Ea.	2275	134		2409	
	Demolish and Install	Ea.	2275	179		2454	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	4.09	25.50		29.59	
	Paint	Ea.	6.20	90		96.20	
	Minimum Charge	Job		269		269	
Single Oven, 30" Wide							
Good Grade Laminated							
	Demolish	Ea.		45		45	Includes material and labor to install good modular unit with melamine laminated to particle board, in textured colors or wood grain print finish, hinges and pulls.
	Install	Ea.	1300	134		1434	
	Demolish and Install	Ea.	1300	179		1479	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	4.09	25.50		29.59	
	Paint	Ea.	6.20	70.50		76.70	
	Minimum Charge	Job		269		269	
Better Grade Veneer							
	Demolish	Ea.		45		45	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	1375	134		1509	
	Demolish and Install	Ea.	1375	179		1554	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	4.09	25.50		29.59	
	Paint	Ea.	6.20	70.50		76.70	
	Minimum Charge	Job		269		269	

Cabinets and Countertops

Tall Cabinets		Unit	Material	Labor	Equip.	Total	Specification
Premium Grade Veneer							
	Demolish	Ea.		45		45	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	1550	134		1684	
	Demolish and Install	Ea.	1550	179		1729	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	4.09	25.50		29.59	
	Paint	Ea.	6.20	70.50		76.70	
	Minimum Charge	Job		269		269	
Premium Hardwood							
	Demolish	Ea.		45		45	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges and pulls, laminated interior.
	Install	Ea.	1950	134		2084	
	Demolish and Install	Ea.	1950	179		2129	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	4.09	25.50		29.59	
	Paint	Ea.	6.20	70.50		76.70	
	Minimum Charge	Job		269		269	
Utility 18" W x 12" D							
Good Grade Laminated							
	Demolish	Ea.		45		45	Includes material and labor to install good modular unit with melamine laminated to particle board, in textured colors or wood grain print finish, hinges and pulls.
	Install	Ea.	330	108		438	
	Demolish and Install	Ea.	330	153		483	
	Reinstall	Ea.		86.02		86.02	
	Clean	Ea.	.96	12.25		13.21	
	Paint	Ea.	2.37	27.50		29.87	
	Minimum Charge	Job		269		269	
Better Grade Veneer							
	Demolish	Ea.		45		45	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	440	108		548	
	Demolish and Install	Ea.	440	153		593	
	Reinstall	Ea.		86.02		86.02	
	Clean	Ea.	.96	12.25		13.21	
	Paint	Ea.	2.37	29.50		31.87	
	Minimum Charge	Job		269		269	
Premium Grade Veneer							
	Demolish	Ea.		45		45	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	530	108		638	
	Demolish and Install	Ea.	530	153		683	
	Reinstall	Ea.		86.02		86.02	
	Clean	Ea.	.96	12.25		13.21	
	Paint	Ea.	2.37	34		36.37	
	Minimum Charge	Job		269		269	
Premium Hardwood							
	Demolish	Ea.		45		45	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges and pulls, laminated interior.
	Install	Ea.	580	108		688	
	Demolish and Install	Ea.	580	153		733	
	Reinstall	Ea.		86.02		86.02	
	Clean	Ea.	.96	12.25		13.21	
	Paint	Ea.	2.37	36.50		38.87	
	Minimum Charge	Job		269		269	

Cabinets and Countertops

Tall Cabinets		Unit	Material	Labor	Equip.	Total	Specification
Utility 24" W x 24" D							
Good Grade Laminated							
	Demolish	Ea.		45		45	Includes material and labor to install good modular unit with melamine laminated to particle board, in textured colors or wood grain print finish, hinges and pulls.
	Install	Ea.	1300	134		1434	
	Demolish and Install	Ea.	1300	179		1479	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	1.25	16.20		17.45	
	Paint	Ea.	3.16	36.50		39.66	
	Minimum Charge	Job		269		269	
Better Grade Veneer							
	Demolish	Ea.		45		45	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	1725	134		1859	
	Demolish and Install	Ea.	1725	179		1904	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	1.25	16.20		17.45	
	Paint	Ea.	3.16	40		43.16	
	Minimum Charge	Job		269		269	
Premium Grade Veneer							
	Demolish	Ea.		45		45	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	2075	134		2209	
	Demolish and Install	Ea.	2075	179		2254	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	1.25	16.20		17.45	
	Paint	Ea.	3.16	44		47.16	
	Minimum Charge	Job		269		269	
Premium Hardwood							
	Demolish	Ea.		45		45	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges and pulls, laminated interior.
	Install	Ea.	2250	134		2384	
	Demolish and Install	Ea.	2250	179		2429	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	1.25	16.20		17.45	
	Paint	Ea.	3.16	49		52.16	
	Minimum Charge	Job		269		269	
Plain Shelves							
	Install	Ea.	36.50	30		66.50	Includes labor and material to install tall cabinet shelving, per set.
Rotating Shelves							
	Install	Ea.	249	27		276	Includes labor and material to install lazy susan shelving for wall cabinet.
Strip and Refinish							
	Install	L.F.	16	88		104	Includes labor and material to strip, prep and refinish exterior of cabinets.
	Minimum Charge	Job		220		220	
Stain							
	Install	L.F.	.67	4.01		4.68	Includes labor and material to replace normal prep and stain on doors and exterior cabinets.
	Minimum Charge	Job		220		220	

Cabinets and Countertops

Base Cabinets		Unit	Material	Labor	Equip.	Total	Specification	
Good Grade Laminated								
12" w, 1 Door, 1 Drawer								
Demolish	Ea.			11.25		11.25	Includes material and labor to install good modular unit with melamine laminate, textured colors or wood grain print finish including hinges and pulls.	
Install	Ea.	365		43.50		408.50		
Demolish and Install	Ea.	365		54.75		419.75		
Reinstall	Ea.			34.68		34.68		
Clean	Ea.	.65		8.10		8.75		
Paint	Ea.	1.58		18.35		19.93		
Minimum Charge	Job			269		269		
15" w, 1 Door, 1 Drawer								
Demolish	Ea.			14.05		14.05		Includes material and labor to install good modular unit with melamine laminate, textured colors or wood grain print finish including hinges and pulls.
Install	Ea.	375		45		420		
Demolish and Install	Ea.	375		59.05		434.05		
Reinstall	Ea.			35.84		35.84		
Clean	Ea.	.81		10.10		10.91		
Paint	Ea.	1.98		23		24.98		
Minimum Charge	Job			269		269		
18" w, 1 Door, 1 Drawer								
Demolish	Ea.			16.65		16.65	Includes material and labor to install good modular unit with melamine laminate, textured colors or wood grain print finish including hinges and pulls.	
Install	Ea.	390		46		436		
Demolish and Install	Ea.	390		62.65		452.65		
Reinstall	Ea.			36.92		36.92		
Clean	Ea.	.96		12.25		13.21		
Paint	Ea.	2.37		27.50		29.87		
Minimum Charge	Job			269		269		
21" w, 1 Door, 1 Drawer								
Demolish	Ea.			19.55		19.55		Includes material and labor to install good modular unit with melamine laminate, textured colors or wood grain print finish including hinges and pulls.
Install	Ea.	415		47.50		462.50		
Demolish and Install	Ea.	415		67.05		482.05		
Reinstall	Ea.			37.89		37.89		
Clean	Ea.	1.17		14.45		15.62		
Paint	Ea.	2.77		31.50		34.27		
Minimum Charge	Job			269		269		
24" w, 1 Door, 1 Drawer								
Demolish	Ea.			22.50		22.50	Includes material and labor to install good modular unit with melamine laminate, textured colors or wood grain print finish including hinges and pulls.	
Install	Ea.	455		48		503		
Demolish and Install	Ea.	455		70.50		525.50		
Reinstall	Ea.			38.57		38.57		
Clean	Ea.	1.25		16.20		17.45		
Paint	Ea.	3.16		36.50		39.66		
Minimum Charge	Job			269		269		
30" Wide Sink Base								
Demolish	Ea.			28		28		Includes material and labor to install good modular unit with melamine laminate, textured colors or wood grain print finish including hinges and pulls.
Install	Ea.	330		50		380		
Demolish and Install	Ea.	330		78		408		
Reinstall	Ea.			40.19		40.19		
Clean	Ea.	1.64		20		21.64		
Paint	Ea.	3.97		44		47.97		
Minimum Charge	Job			269		269		
36" Wide Sink Base								
Demolish	Ea.			34.50		34.50	Includes material and labor to install good modular unit with melamine laminate, textured colors or wood grain print finish including hinges and pulls.	
Install	Ea.	350		53		403		
Demolish and Install	Ea.	350		87.50		437.50		
Reinstall	Ea.			42.37		42.37		
Clean	Ea.	1.82		24		25.82		
Paint	Ea.	4.80		55		59.80		
Minimum Charge	Job			269		269		

Cabinets and Countertops

Base Cabinets		Unit	Material	Labor	Equip.	Total	Specification
36" Blind Corner							
	Demolish	Ea.		34.50		34.50	Includes material and labor to install good modular unit with melamine laminate, textured colors or wood grain print finish including hinges and pulls.
	Install	Ea.	555	59.50		614.50	
	Demolish and Install	Ea.	555	94		649	
	Reinstall	Ea.		47.79		47.79	
	Clean	Ea.	1.82	24		25.82	
	Paint	Ea.	4.80	55		59.80	
	Minimum Charge	Job		269		269	
42" w, 2 Door, 2 Drawer							
	Demolish	Ea.		41		41	Includes material and labor to install good modular unit with melamine laminate, textured colors or wood grain print finish including hinges and pulls.
	Install	Ea.	675	54.50		729.50	
	Demolish and Install	Ea.	675	95.50		770.50	
	Reinstall	Ea.		43.44		43.44	
	Clean	Ea.	2.33	29		31.33	
	Paint	Ea.	5.50	63		68.50	
	Minimum Charge	Job		269		269	
Clean Interior							
	Clean	L.F.	.65	6.15		6.80	Includes labor and materials to clean the interior of a 27" cabinet.
	Minimum Charge	Job		202		202	
Better Grade Wood							
12" w, 1 Door, 1 Drawer							
	Demolish	Ea.		11.25		11.25	Includes material and labor to install custom modular unit including solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	485	43.50		528.50	
	Demolish and Install	Ea.	485	54.75		539.75	
	Reinstall	Ea.		34.68		34.68	
	Clean	Ea.	.65	8.10		8.75	
	Paint	Ea.	1.58	20		21.58	
	Minimum Charge	Job		269		269	
15" w, 1 Door, 1 Drawer							
	Demolish	Ea.		14.05		14.05	Includes material and labor to install custom modular unit including solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	500	45		545	
	Demolish and Install	Ea.	500	59.05		559.05	
	Reinstall	Ea.		35.84		35.84	
	Clean	Ea.	.81	10.10		10.91	
	Paint	Ea.	1.98	26		27.98	
	Minimum Charge	Job		269		269	
18" w, 1 Door, 1 Drawer							
	Demolish	Ea.		16.65		16.65	Includes material and labor to install custom modular unit including solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	525	46		571	
	Demolish and Install	Ea.	525	62.65		587.65	
	Reinstall	Ea.		36.92		36.92	
	Clean	Ea.	.96	12.25		13.21	
	Paint	Ea.	2.37	29.50		31.87	
	Minimum Charge	Job		269		269	
21" w, 1 Door, 1 Drawer							
	Demolish	Ea.		19.55		19.55	Includes material and labor to install custom modular unit including solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	550	47.50		597.50	
	Demolish and Install	Ea.	550	67.05		617.05	
	Reinstall	Ea.		37.89		37.89	
	Clean	Ea.	1.17	14.45		15.62	
	Paint	Ea.	2.77	34		36.77	
	Minimum Charge	Job		269		269	

Cabinets and Countertops

Base Cabinets		Unit	Material	Labor	Equip.	Total	Specification
24" w, 1 Door, 1 Drawer							
	Demolish	Ea.		22.50		22.50	Includes material and labor to install custom modular unit including solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	605	48		653	
	Demolish and Install	Ea.	605	70.50		675.50	
	Reinstall	Ea.		38.57		38.57	
	Clean	Ea.	1.25	16.20		17.45	
	Paint	Ea.	3.16	40		43.16	
	Minimum Charge	Job		269		269	
30" Wide Sink Base							
	Demolish	Ea.		28		28	Includes material and labor to install custom modular unit including solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	440	50		490	
	Demolish and Install	Ea.	440	78		518	
	Reinstall	Ea.		40.19		40.19	
	Clean	Ea.	1.64	20		21.64	
	Paint	Ea.	3.97	49		52.97	
	Minimum Charge	Job		269		269	
36" Wide Sink Base							
	Demolish	Ea.		34.50		34.50	Includes material and labor to install custom modular unit including solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	470	53		523	
	Demolish and Install	Ea.	470	87.50		557.50	
	Reinstall	Ea.		42.37		42.37	
	Clean	Ea.	1.82	24		25.82	
	Paint	Ea.	4.80	63		67.80	
	Minimum Charge	Job		269		269	
36" Blind Corner							
	Demolish	Ea.		34.50		34.50	Includes material and labor to install custom modular unit including solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	745	59.50		804.50	
	Demolish and Install	Ea.	745	94		839	
	Reinstall	Ea.		47.79		47.79	
	Clean	Ea.	1.82	24		25.82	
	Paint	Ea.	4.80	63		67.80	
	Minimum Charge	Job		269		269	
42" w, 2 Door, 2 Drawer							
	Demolish	Ea.		41		41	Includes material and labor to install modular unit including solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	895	54.50		949.50	
	Demolish and Install	Ea.	895	95.50		990.50	
	Reinstall	Ea.		43.44		43.44	
	Clean	Ea.	2.33	29		31.33	
	Paint	Ea.	5.50	73.50		79	
	Minimum Charge	Job		269		269	
Clean Interior							
	Clean	L.F.	.65	6.15		6.80	Includes labor and materials to clean the interior of a 27" cabinet.
	Minimum Charge	Job		202		202	
Premium Grade Wood							
12" w, 1 Door, 1 Drawer							
	Demolish	Ea.		11.25		11.25	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges, pulls and laminated interior.
	Install	Ea.	580	21.50		601.50	
	Demolish and Install	Ea.	580	32.75		612.75	
	Reinstall	Ea.		17.34		17.34	
	Clean	Ea.	.65	8.10		8.75	
	Paint	Ea.	1.58	22		23.58	
	Minimum Charge	Job		269		269	

Cabinets and Countertops

Base Cabinets		Unit	Material	Labor	Equip.	Total	Specification
15" w, 1 Door, 1 Drawer							
	Demolish	Ea.		14.05		14.05	Includes material and labor to install premium modular unit including solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	600	45		645	
	Demolish and Install	Ea.	600	59.05		659.05	
	Reinstall	Ea.		35.84		35.84	
	Clean	Ea.	.81	10.10		10.91	
	Paint	Ea.	1.98	27.50		29.48	
	Minimum Charge	Job		269		269	
18" w, 1 Door, 1 Drawer							
	Demolish	Ea.		16.65		16.65	Includes material and labor to install premium modular unit including solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	625	46		671	
	Demolish and Install	Ea.	625	62.65		687.65	
	Reinstall	Ea.		36.92		36.92	
	Clean	Ea.	.96	12.25		13.21	
	Paint	Ea.	2.37	34		36.37	
	Minimum Charge	Job		269		269	
21" w, 1 Door, 1 Drawer							
	Demolish	Ea.		19.55		19.55	Includes material and labor to install premium modular unit including solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	665	47.50		712.50	
	Demolish and Install	Ea.	665	67.05		732.05	
	Reinstall	Ea.		37.89		37.89	
	Clean	Ea.	1.17	14.45		15.62	
	Paint	Ea.	2.77	36.50		39.27	
	Minimum Charge	Job		269		269	
24" w, 1 Door, 1 Drawer							
	Demolish	Ea.		22.50		22.50	Includes material and labor to install premium modular unit including solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	725	48		773	
	Demolish and Install	Ea.	725	70.50		795.50	
	Reinstall	Ea.		38.57		38.57	
	Clean	Ea.	1.25	16.20		17.45	
	Paint	Ea.	3.16	44		47.16	
	Minimum Charge	Job		269		269	
30" Wide Sink Base							
	Demolish	Ea.		28		28	Includes material and labor to install premium modular unit including solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	525	50		575	
	Demolish and Install	Ea.	525	78		603	
	Reinstall	Ea.		40.19		40.19	
	Clean	Ea.	1.64	20		21.64	
	Paint	Ea.	3.97	55		58.97	
	Minimum Charge	Job		269		269	
36" Wide Sink Base							
	Demolish	Ea.		34.50		34.50	Includes material and labor to install premium modular unit including solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	560	53		613	
	Demolish and Install	Ea.	560	87.50		647.50	
	Reinstall	Ea.		42.37		42.37	
	Clean	Ea.	1.82	24		25.82	
	Paint	Ea.	4.80	63		67.80	
	Minimum Charge	Job		269		269	
36" Blind Corner							
	Demolish	Ea.		34.50		34.50	Includes material and labor to install premium modular unit including solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	890	59.50		949.50	
	Demolish and Install	Ea.	890	94		984	
	Reinstall	Ea.		47.79		47.79	
	Clean	Ea.	1.82	24		25.82	
	Paint	Ea.	4.80	63		67.80	
	Minimum Charge	Job		269		269	

Cabinets and Countertops

Base Cabinets		Unit	Material	Labor	Equip.	Total	Specification
42" w, 2 Door, 2 Drawer							
	Demolish	Ea.		41		41	Includes material and labor to install premium modular unit including solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	1175	54.50		1229.50	
	Demolish and Install	Ea.	1175	95.50		1270.50	
	Reinstall	Ea.		43.44		43.44	
	Clean	Ea.	2.33	29		31.33	
	Paint	Ea.	5.50	73.50		79	
	Minimum Charge	Job		269		269	
Clean Interior							
	Clean	L.F.	.65	6.15		6.80	Includes labor and materials to clean the interior of a 27" cabinet.
	Minimum Charge	Job		202		202	
Premium Hardwood							
12" w, 1 Door, 1 Drawer							
	Demolish	Ea.		11.25		11.25	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges, pulls and laminated interior.
	Install	Ea.	635	43.50		678.50	
	Demolish and Install	Ea.	635	54.75		689.75	
	Reinstall	Ea.		34.68		34.68	
	Clean	Ea.	.65	8.10		8.75	
	Paint	Ea.	1.58	24.50		26.08	
	Minimum Charge	Job		269		269	
15" w, 1 Door, 1 Drawer							
	Demolish	Ea.		14.05		14.05	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges, pulls and laminated interior.
	Install	Ea.	655	45		700	
	Demolish and Install	Ea.	655	59.05		714.05	
	Reinstall	Ea.		35.84		35.84	
	Clean	Ea.	.81	10.10		10.91	
	Paint	Ea.	1.98	31.50		33.48	
	Minimum Charge	Job		269		269	
18" w, 1 Door, 1 Drawer							
	Demolish	Ea.		16.65		16.65	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges, pulls and laminated interior.
	Install	Ea.	690	46		736	
	Demolish and Install	Ea.	690	62.65		752.65	
	Reinstall	Ea.		36.92		36.92	
	Clean	Ea.	.96	12.25		13.21	
	Paint	Ea.	2.37	36.50		38.87	
	Minimum Charge	Job		269		269	
21" w, 1 Door, 1 Drawer							
	Demolish	Ea.		19.55		19.55	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges, pulls and laminated interior.
	Install	Ea.	720	47.50		767.50	
	Demolish and Install	Ea.	720	67.05		787.05	
	Reinstall	Ea.		37.89		37.89	
	Clean	Ea.	1.17	14.45		15.62	
	Paint	Ea.	2.77	40		42.77	
	Minimum Charge	Job		269		269	
24" w, 1 Door, 1 Drawer							
	Demolish	Ea.		22.50		22.50	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges and pulls, laminated interior.
	Install	Ea.	790	48		838	
	Demolish and Install	Ea.	790	70.50		860.50	
	Reinstall	Ea.		38.57		38.57	
	Clean	Ea.	1.25	16.20		17.45	
	Paint	Ea.	3.16	49		52.16	
	Minimum Charge	Job		269		269	

Cabinets and Countertops

Base Cabinets		Unit	Material	Labor	Equip.	Total	Specification
30" Wide Sink Base							
	Demolish	Ea.		28		28	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges, pulls and laminated interior.
	Install	Ea.	570	50		620	
	Demolish and Install	Ea.	570	78		648	
	Reinstall	Ea.		40.19		40.19	
	Clean	Ea.	1.64	20		21.64	
	Paint	Ea.	3.97	55		58.97	
	Minimum Charge	Job		269		269	
36" Wide Sink Base							
	Demolish	Ea.		34.50		34.50	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges, pulls and laminated interior.
	Install	Ea.	610	53		663	
	Demolish and Install	Ea.	610	87.50		697.50	
	Reinstall	Ea.		42.37		42.37	
	Clean	Ea.	1.82	24		25.82	
	Paint	Ea.	4.80	73.50		78.30	
	Minimum Charge	Job		269		269	
36" Blind Corner							
	Demolish	Ea.		34.50		34.50	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges, pulls and laminated interior.
	Install	Ea.	970	59.50		1029.50	
	Demolish and Install	Ea.	970	94		1064	
	Reinstall	Ea.		47.79		47.79	
	Clean	Ea.	1.82	24		25.82	
	Paint	Ea.	4.80	73.50		78.30	
	Minimum Charge	Job		269		269	
42" w, 2 Door, 2 Drawer							
	Demolish	Ea.		41		41	Includes material and labor to install premium hardwood modular unit with solid hardwood faced frames, drawer fronts, and door panels, steel drawer guides, hinges, pulls and laminated interior.
	Install	Ea.	1575	54.50		1629.50	
	Demolish and Install	Ea.	1575	95.50		1670.50	
	Reinstall	Ea.		43.44		43.44	
	Clean	Ea.	2.33	29		31.33	
	Paint	Ea.	5.50	88		93.50	
	Minimum Charge	Job		269		269	
Clean Interior							
	Clean	L.F.	.65	6.15		6.80	Includes labor and materials to clean the interior of a 27" cabinet.
	Minimum Charge	Job		202		202	
Island							
24" Wide							
	Demolish	Ea.		22.50		22.50	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	845	45		890	
	Demolish and Install	Ea.	845	67.50		912.50	
	Reinstall	Ea.		35.84		35.84	
	Clean	Ea.	1.82	24		25.82	
	Paint	Ea.	4.74	63		67.74	
	Minimum Charge	Job		269		269	
30" Wide							
	Demolish	Ea.		28		28	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	865	56		921	
	Demolish and Install	Ea.	865	84		949	
	Reinstall	Ea.		44.80		44.80	
	Clean	Ea.	2.33	29		31.33	
	Paint	Ea.	5.95	73.50		79.45	
	Minimum Charge	Job		269		269	

Cabinets and Countertops

Base Cabinets		Unit	Material	Labor	Equip.	Total	Specification
36" Wide							
	Demolish	Ea.		34.50		34.50	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	920	67		987	
	Demolish and Install	Ea.	920	101.50		1021.50	
	Reinstall	Ea.		53.76		53.76	
	Clean	Ea.	2.73	37		39.73	
	Paint	Ea.	7.20	88		95.20	
	Minimum Charge	Job		269		269	
48" Wide							
	Demolish	Ea.		45		45	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	1675	89.50		1764.50	
	Demolish and Install	Ea.	1675	134.50		1809.50	
	Reinstall	Ea.		71.68		71.68	
	Clean	Ea.	3.27	45		48.27	
	Paint	Ea.	8.25	110		118.25	
	Minimum Charge	Job		269		269	
60" Wide							
	Demolish	Ea.		50		50	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	1725	112		1837	
	Demolish and Install	Ea.	1725	162		1887	
	Reinstall	Ea.		89.60		89.60	
	Clean	Ea.	4.09	58		62.09	
	Paint	Ea.	8.25	147		155.25	
	Minimum Charge	Job		269		269	
Clean Interior							
	Clean	L.F.	.65	6.15		6.80	Includes labor and materials to clean the interior of a 27" cabinet.
	Minimum Charge	Job		202		202	
Liquor Bar							
	Demolish	L.F.		11.25		11.25	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	L.F.	287	54		341	
	Demolish and Install	L.F.	287	65.25		352.25	
	Reinstall	L.F.		43.01		43.01	
	Clean	L.F.	.65	8.45		9.10	
	Paint	L.F.	12.65	20		32.65	
	Minimum Charge	Job		269		269	
Clean Interior							
	Clean	L.F.	.65	6.15		6.80	Includes labor and materials to clean the interior of a 27" cabinet.
	Minimum Charge	Job		202		202	
Seal Interior							
	Install	L.F.	1.16	7.25		8.41	Includes labor and materials to seal a cabinet interior.
	Minimum Charge	Job		220		220	
Back Bar							
	Demolish	L.F.		11.25		11.25	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	L.F.	287	54		341	
	Demolish and Install	L.F.	287	65.25		352.25	
	Reinstall	L.F.		43.01		43.01	
	Clean	L.F.	.65	8.45		9.10	
	Paint	L.F.	12.65	20		32.65	
	Minimum Charge	Job		269		269	
Clean Interior							
	Clean	L.F.	.65	6.15		6.80	Includes labor and materials to clean the interior of a 27" cabinet.
	Minimum Charge	Job		202		202	

Cabinets and Countertops

Base Cabinets		Unit	Material	Labor	Equip.	Total	Specification
Seal Interior	Install	L.F.	1.16	7.25		8.41	Includes labor and materials to seal a cabinet interior.
	Minimum Charge	Job		220		220	
Storage (garage)	Demolish	L.F.		11.25		11.25	Includes material and labor to install good modular unit with melamine laminate, textured colors or wood grain print finish including hinges and pulls.
	Install	L.F.	216	54		270	
	Demolish and Install	L.F.	216	65.25		281.25	
	Reinstall	L.F.		43.01		43.01	
	Clean	L.F.	.65	8.45		9.10	
Clean Interior	Paint	L.F.	12.65	20		32.65	
	Minimum Charge	Job		269		269	
Seal Interior	Clean	L.F.	.65	6.15		6.80	Includes labor and materials to clean the interior of a 27" cabinet.
	Minimum Charge	Job		202		202	
Built-in Desk	Install	L.F.	1.16	7.25		8.41	Includes labor and materials to seal a cabinet interior.
	Minimum Charge	Job		220		220	
Built-in Bookcase	Demolish	L.F.		11.25		11.25	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	L.F.	287	54		341	
	Demolish and Install	L.F.	287	65.25		352.25	
	Reinstall	L.F.		43.01		43.01	
	Clean	L.F.	.65	8.45		9.10	
	Paint	L.F.	12.65	20		32.65	
	Minimum Charge	Job		269		269	
Strip and Refinish	Demolish	L.F.		15		15	Includes material and labor to install custom modular bookcase unit with clear pine faced frames, shelves 12" O.C., 7' high, 8" deep.
	Install	L.F.	28	54		82	
	Demolish and Install	L.F.	28	69		97	
	Reinstall	L.F.		43.01		43.01	
	Clean	L.F.	1.31	14.45		15.76	
Stain	Paint	L.F.	3.70	34		37.70	
	Minimum Charge	Job		269		269	
Strip and Refinish	Install	L.F.	8.05	55		63.05	Includes labor and material to strip, prep and refinish exterior of cabinets.
	Minimum Charge	Job		220		220	
Stain	Install	L.F.	1.52	2.05		3.57	Includes labor and material to stain door and exterior of cabinets.
	Minimum Charge	Job		269		269	

Countertop		Unit	Material	Labor	Equip.	Total	Specification
Laminated With Splash	Demolish	L.F.		7.50		7.50	Includes material and labor to install one piece laminated top with 4" backsplash.
	Install	L.F.	50	19.20		69.20	
	Demolish and Install	L.F.	50	26.70		76.70	
	Reinstall	L.F.		15.36		15.36	
	Clean	L.F.	.08	1.01		1.09	
	Minimum Charge	Job		269		269	

Cabinets and Countertops

Countertop		Unit	Material	Labor	Equip.	Total	Specification
Roll Top	Demolish	L.F.		7.50		7.50	Includes material and labor to install one piece laminated top with rolled drip edge (post formed) and backsplash.
	Install	L.F.	13.95	17.90		31.85	
	Demolish and Install	L.F.	13.95	25.40		39.35	
	Reinstall	L.F.		14.34		14.34	
	Clean	L.F.	.12	1.53		1.65	
	Minimum Charge	Job		269		269	
Ceramic Tile	Demolish	S.F.		3.75		3.75	Cost includes material and labor to install 4-1/4" x 4-1/4" to 6" x 6" glazed tile set in mortar bed and grout on particle board substrate.
	Install	S.F.	25	10.75		35.75	
	Demolish and Install	S.F.	25	14.50		39.50	
	Clean	S.F.	.06	.77		.83	
	Minimum Charge	Job		261		261	
Cultured Marble	Demolish	L.F.		7.50		7.50	Includes material and labor to install marble countertop, 24" wide, no backsplash.
	Install	L.F.	256	53		309	
	Demolish and Install	L.F.	256	60.50		316.50	
	Reinstall	L.F.		42.59		42.59	
	Clean	L.F.	.12	1.53		1.65	
	Minimum Charge	Job		261		261	
With Splash	Demolish	L.F.		7.50		7.50	Includes material and labor to install marble countertop, 24" wide, with backsplash.
	Install	L.F.	287	53		340	
	Demolish and Install	L.F.	287	60.50		347.50	
	Reinstall	L.F.		42.59		42.59	
	Clean	L.F.	.12	1.53		1.65	
	Minimum Charge	Job		261		261	
Quarry Tile	Demolish	S.F.		3.75		3.75	Includes material and labor to install quarry tile countertop with no backsplash.
	Install	S.F.	18.30	10.75		29.05	
	Demolish and Install	S.F.	18.30	14.50		32.80	
	Clean	S.F.	.06	.77		.83	
	Minimum Charge	Job		261		261	
With Splash	Demolish	S.F.		3.75		3.75	Includes material and labor to install quarry tile countertop with backsplash.
	Install	S.F.	20	11.95		31.95	
	Demolish and Install	S.F.	20	15.70		35.70	
	Clean	S.F.	.06	.77		.83	
	Minimum Charge	Job		261		261	
Butcher Block	Demolish	S.F.		3.75		3.75	Includes material and labor to install solid laminated maple countertop with no backsplash.
	Install	S.F.	49	9.60		58.60	
	Demolish and Install	S.F.	49	13.35		62.35	
	Reinstall	S.F.		7.68		7.68	
	Clean	S.F.	.03	.32		.35	
	Minimum Charge	Job		269		269	
Solid Surface	Demolish	L.F.		7.50		7.50	Includes material and labor to install solid surface counter top 22" deep.
	Install	L.F.	61.50	38.50		100	
	Demolish and Install	L.F.	61.50	46		107.50	
	Reinstall	L.F.		30.72		30.72	
	Clean	L.F.	.12	1.53		1.65	
	Minimum Charge	Job		269		269	

Cabinets and Countertops

Vanity Cabinets		Unit	Material	Labor	Equip.	Total	Specification
Good Grade Laminated							
24" Wide, 2 Door							
	Demolish	Ea.		22.50		22.50	Includes material and labor to install modular unit with melamine laminated to particle board, textured colors or wood grain print finish, hinges and pulls.
	Install	Ea.	565	54		619	
	Demolish and Install	Ea.	565	76.50		641.50	
	Reinstall	Ea.		43.01		43.01	
	Clean	Ea.	1.25	16.20		17.45	
	Paint	Ea.	3.16	36.50		39.66	
	Minimum Charge	Job		269		269	
30" Wide, 2 Door							
	Demolish	Ea.		28		28	Includes material and labor to install modular unit with melamine laminated to particle board, textured colors or wood grain print finish, hinges and pulls.
	Install	Ea.	530	67		597	
	Demolish and Install	Ea.	530	95		625	
	Reinstall	Ea.		53.76		53.76	
	Clean	Ea.	1.64	20		21.64	
	Paint	Ea.	3.97	44		47.97	
	Minimum Charge	Job		269		269	
36" Wide, 2 Door							
	Demolish	Ea.		34.50		34.50	Includes material and labor to install modular unit with melamine laminated to particle board, textured colors or wood grain print finish, hinges and pulls.
	Install	Ea.	510	80.50		590.50	
	Demolish and Install	Ea.	510	115		625	
	Reinstall	Ea.		64.53		64.53	
	Clean	Ea.	1.82	24		25.82	
	Paint	Ea.	4.80	55		59.80	
	Minimum Charge	Job		269		269	
42" w, 3 Doors / Drawer							
	Demolish	Ea.		41		41	Includes material and labor to install modular unit with melamine laminated to particle board, textured colors or wood grain print finish, hinges and pulls.
	Install	Ea.	1025	87		1112	
	Demolish and Install	Ea.	1025	128		1153	
	Reinstall	Ea.		69.48		69.48	
	Clean	Ea.	2.33	29		31.33	
	Paint	Ea.	5.50	63		68.50	
	Minimum Charge	Job		269		269	
48" w, 3 Doors / Drawer							
	Demolish	Ea.		45		45	Includes material and labor to install modular unit with melamine laminated to particle board, textured colors or wood grain print finish, hinges and pulls.
	Install	Ea.	670	94		764	
	Demolish and Install	Ea.	670	139		809	
	Reinstall	Ea.		75.25		75.25	
	Clean	Ea.	3.27	45		48.27	
	Paint	Ea.	8.25	110		118.25	
	Minimum Charge	Job		269		269	
Clean Interior							
	Install	L.F.	.65	8.45		9.10	Includes labor and materials to clean base cabinetry.
	Minimum Charge	Job		202		202	
Better Grade Wood							
24" Wide, 2 Door							
	Demolish	Ea.		22.50		22.50	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	760	54		814	
	Demolish and Install	Ea.	760	76.50		836.50	
	Reinstall	Ea.		43.01		43.01	
	Clean	Ea.	1.25	16.20		17.45	
	Paint	Ea.	3.16	40		43.16	
	Minimum Charge	Job		269		269	

Cabinets and Countertops

Vanity Cabinets		Unit	Material	Labor	Equip.	Total	Specification
30" Wide, 2 Door							
	Demolish	Ea.		28		28	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	705	67		772	
	Demolish and Install	Ea.	705	95		800	
	Reinstall	Ea.		53.76		53.76	
	Clean	Ea.	1.64	20		21.64	
	Paint	Ea.	3.97	49		52.97	
	Minimum Charge	Job		269		269	
36" Wide, 2 Door							
	Demolish	Ea.		34.50		34.50	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	680	80.50		760.50	
	Demolish and Install	Ea.	680	115		795	
	Reinstall	Ea.		64.53		64.53	
	Clean	Ea.	1.82	24		25.82	
	Paint	Ea.	4.80	63		67.80	
	Minimum Charge	Job		269		269	
42" w, 3 Doors / Drawer							
	Demolish	Ea.		41		41	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	1025	87		1112	
	Demolish and Install	Ea.	1025	128		1153	
	Reinstall	Ea.		69.48		69.48	
	Clean	Ea.	2.33	29		31.33	
	Paint	Ea.	5.50	73.50		79	
	Minimum Charge	Job		269		269	
48" w, 3 Doors / Drawer							
	Demolish	Ea.		45		45	Includes material and labor to install custom modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	890	94		984	
	Demolish and Install	Ea.	890	139		1029	
	Reinstall	Ea.		75.25		75.25	
	Clean	Ea.	3.27	45		48.27	
	Paint	Ea.	8.25	110		118.25	
	Minimum Charge	Job		269		269	
Clean Interior							
	Install	L.F.	.65	8.45		9.10	Includes labor and materials to clean base cabinetry.
	Minimum Charge	Job		202		202	
Premium Grade Wood							
24" Wide, 2 Door							
	Demolish	Ea.		22.50		22.50	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	775	54		829	
	Demolish and Install	Ea.	775	76.50		851.50	
	Reinstall	Ea.		43.01		43.01	
	Clean	Ea.	1.25	16.20		17.45	
	Paint	Ea.	3.16	44		47.16	
	Minimum Charge	Job		269		269	
30" Wide, 2 Door							
	Demolish	Ea.		28		28	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	735	67		802	
	Demolish and Install	Ea.	735	95		830	
	Reinstall	Ea.		53.76		53.76	
	Clean	Ea.	1.64	20		21.64	
	Paint	Ea.	3.97	55		58.97	
	Minimum Charge	Job		269		269	

Cabinets and Countertops



Vanity Cabinets		Unit	Material	Labor	Equip.	Total	Specification
36" Wide, 2 Door							
	Demolish	Ea.		34.50		34.50	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	810	80.50		890.50	
	Demolish and Install	Ea.	810	115		925	
	Reinstall	Ea.		64.53		64.53	
	Clean	Ea.	1.82	24		25.82	
	Paint	Ea.	4.80	63		67.80	
	Minimum Charge	Job		269		269	
42" w, 3 Doors / Drawer							
	Demolish	Ea.		41		41	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	915	87		1002	
	Demolish and Install	Ea.	915	128		1043	
	Reinstall	Ea.		69.48		69.48	
	Clean	Ea.	2.33	29		31.33	
	Paint	Ea.	5.50	73.50		79	
	Minimum Charge	Job		269		269	
48" w, 3 Doors / Drawer							
	Demolish	Ea.		45		45	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	1175	94		1269	
	Demolish and Install	Ea.	1175	139		1314	
	Reinstall	Ea.		75.25		75.25	
	Clean	Ea.	3.27	45		48.27	
	Paint	Ea.	8.25	110		118.25	
	Minimum Charge	Job		269		269	
Clean Interior							
	Install	L.F.	.65	8.45		9.10	Includes labor and materials to clean base cabinetry.
	Minimum Charge	Job		202		202	
Premium Hardwood							
24" Wide, 2 Door							
	Demolish	Ea.		22.50		22.50	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	800	54		854	
	Demolish and Install	Ea.	800	76.50		876.50	
	Reinstall	Ea.		43.01		43.01	
	Clean	Ea.	1.25	16.20		17.45	
	Paint	Ea.	3.16	49		52.16	
	Minimum Charge	Job		269		269	
30" Wide, 2 Door							
	Demolish	Ea.		28		28	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	825	67		892	
	Demolish and Install	Ea.	825	95		920	
	Reinstall	Ea.		53.76		53.76	
	Clean	Ea.	1.64	20		21.64	
	Paint	Ea.	3.97	55		58.97	
	Minimum Charge	Job		269		269	
36" Wide, 2 Door							
	Demolish	Ea.		34.50		34.50	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	1450	80.50		1530.50	
	Demolish and Install	Ea.	1450	115		1565	
	Reinstall	Ea.		64.53		64.53	
	Clean	Ea.	1.82	24		25.82	
	Paint	Ea.	4.80	73.50		78.30	
	Minimum Charge	Job		269		269	

Cabinets and Countertops

Vanity Cabinets		Unit	Material	Labor	Equip.	Total	Specification
42" w, 3 Doors / Drawer							
	Demolish	Ea.		41		41	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	1050	87		1137	
	Demolish and Install	Ea.	1050	128		1178	
	Reinstall	Ea.		69.48		69.48	
	Clean	Ea.	2.33	29		31.33	
	Paint	Ea.	5.50	88		93.50	
	Minimum Charge	Job		269		269	
48" w, 3 Doors / Drawer							
	Demolish	Ea.		45		45	Includes material and labor to install premium modular unit with solid hardwood faced frames, hardwood door frames and drawer fronts, hardwood veneer on raised door panels, hinges and pulls.
	Install	Ea.	1175	94		1269	
	Demolish and Install	Ea.	1175	139		1314	
	Reinstall	Ea.		75.25		75.25	
	Clean	Ea.	3.27	45		48.27	
	Paint	Ea.	8.25	110		118.25	
	Minimum Charge	Job		269		269	
Clean Interior							
	Install	L.F.	.65	8.45		9.10	Includes labor and materials to clean base cabinetry.
	Minimum Charge	Job		202		202	
Strip and Refinish							
	Install	L.F.	8.05	55		63.05	Includes labor and material to strip, prep and refinish exterior of cabinets.
	Minimum Charge	Job		220		220	

Vanity Cabinet Tops		Unit	Material	Labor	Equip.	Total	Specification
Cultured Marble Top							
	Demolish	L.F.		7.50		7.50	Includes material and labor to install cultured marble vanity top with integral sink, 22" deep.
	Install	L.F.	59	31.50		90.50	
	Demolish and Install	L.F.	59	39		98	
	Reinstall	L.F.		25.05		25.05	
	Clean	L.F.	.12	1.53		1.65	
	Minimum Charge	Job		261		261	
Laminated Top							
	Demolish	L.F.		4.50		4.50	Includes material and labor to install one piece laminated top with 4" backsplash.
	Install	L.F.	50	19.20		69.20	
	Demolish and Install	L.F.	50	23.70		73.70	
	Reinstall	L.F.		15.36		15.36	
	Clean	L.F.	.08	1.01		1.09	
	Minimum Charge	Job		269		269	
Solid Surface							
	Demolish	L.F.		7.50		7.50	Includes material and labor to install solid surface vanity top with integral sink installed, 22" deep.
	Install	L.F.	91.50	40		131.50	
	Demolish and Install	L.F.	91.50	47.50		139	
	Reinstall	L.F.		31.86		31.86	
	Clean	L.F.	.12	1.53		1.65	
	Minimum Charge	Job		269		269	

Painting

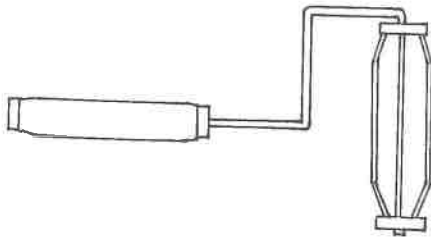

Roller Handle

Paint Brush

Paint Preparation, Walls		Unit	Material	Labor	Equip.	Total	Specification
Cover / Protect Floors	Install	S.F.	.08	.17		.25	Includes material and labor to install plastic masking sheet on large uninterrupted areas.
	Minimum Charge	Job		222		222	
Cover / Protect Walls	Install	S.F.	.08	.17		.25	Includes material and labor to install plastic masking sheet on walls.
	Minimum Charge	Job		222		222	
Clean Walls Light	Clean	S.F.		.14		.14	Includes labor to wash gypsum drywall or plaster wall surfaces.
	Minimum Charge	Job		222		222	
Heavy	Clean	S.F.		.18		.18	Includes labor and material for heavy cleaning (multiple applications) with detergent and solvent.
	Minimum Charge	Job		222		222	
Prep Walls	Paint	S.F.	.06	.22		.28	Includes labor and material to prepare for painting including scraping, patching and puttying.
	Minimum Charge	Job		222		222	
Sand Walls	Paint	S.F.		.14		.14	Includes labor to sand gypsum drywall wall surfaces.
	Minimum Charge	Job		222		222	
Seal Walls Large Area	Paint	S.F.	.09	.33		.42	Includes labor and material to paint with primer / sealer by roller.
	Minimum Charge	Job		222		222	
Spot	Paint	S.F.	.13	.38		.51	Includes labor and material to seal existing drywall with shellac-based material.
	Minimum Charge	Job		222		222	

Painting

Paint Preparation, Ceilings		Unit	Material	Labor	Equip.	Total	Specification
Cover / Protect Floors	Install	S.F.	.08	.17		.25	Includes material and labor to install plastic masking sheet on large uninterrupted areas.
	Minimum Charge	Job		222		222	
Cover / Protect Walls	Install	S.F.	.08	.17		.25	Includes material and labor to install plastic masking sheet on walls.
	Minimum Charge	Job		222		222	
Prep Ceiling	Paint	S.F.	.09	.94		1.03	Includes labor and material to fill in hairline cracks up to 1/8" with filler, sand and prep for paint.
	Minimum Charge	Job		222		222	
Sand Ceiling	Paint	S.F.		.20		.20	Includes labor to sand gypsum drywall ceiling surfaces.
	Minimum Charge	Job		222		222	
Seal Ceiling Large Area	Paint	S.F.	.24	.34		.58	Includes labor and material to paint ceiling, one coat flat latex.
	Minimum Charge	Job		220		220	
Spot	Paint	S.F.	.13	.38		.51	Includes labor and material to seal existing drywall with shellac-based material.
	Minimum Charge	Job		220		220	




Paint / Texture, Walls		Unit	Material	Labor	Equip.	Total	Specification
Texture Walls Spray	Install	S.F.	.07	.68		.75	Includes labor and material to install by spray, texture finish.
	Minimum Charge	Job		220		220	
Trowel	Install	S.F.	.59	1.17		1.76	Includes labor and material to apply hand troweled texture.
	Minimum Charge	Job		220		220	
Paint Walls 1 Coat	Paint	S.F.	.24	.34		.58	Includes labor and material to paint, one coat flat latex.
	Minimum Charge	Job		220		220	
Paint Walls 2 Coats	Paint	S.F.	.50	.55		1.05	Includes labor and material to paint, two coats flat latex.
	Minimum Charge	Job		220		220	
Paint Walls 3 Coats	Paint	S.F.	.74	.68		1.42	Includes labor and material to paint, three coats flat latex.
	Minimum Charge	Job		220		220	
Clean and Seal	Paint	S.F.	.36	1.18		1.54	Includes labor and material to do light cleaning, sealing with 2 coats of latex paint.
	Minimum Charge	Job		220		220	

Paint / Texture, Ceilings		Unit	Material	Labor	Equip.	Total	Specification
Texture Ceiling Spray	Install	S.F.	.07	.68		.75	Includes labor and material to install by spray, texture finish.
	Minimum Charge	Job		220		220	

Painting

Paint / Texture, Ceilings		Unit	Material	Labor	Equip.	Total	Specification
Trowel	Install	S.F.	.59	1.17		1.76	Includes labor and material to apply hand troweled texture.
	Minimum Charge	Job		220		220	
Paint Ceiling, 1 Coat	Paint	S.F.	.24	.34		.58	Includes labor and material to paint ceiling, one coat flat latex.
	Minimum Charge	Job		220		220	
Paint Ceiling, 2 Coats	Paint	S.F.	.20	.55		.75	Includes labor and material to paint two coats flat latex paint.
	Minimum Charge	Job		220		220	
Paint Ceiling, 3 Coats	Paint	S.F.	.30	.65		.95	Includes labor and material to paint ceiling, three coats flat latex.
	Minimum Charge	Job		220		220	
Clean and Seal	Paint	S.F.	.30	.93		1.23	Includes labor and material for light cleaning, sealing and paint 3 coats of flat latex paint.
	Minimum Charge	Job		220		220	

Flooring

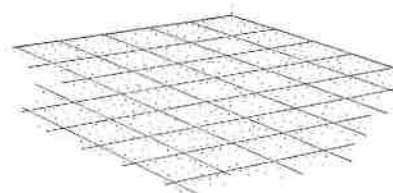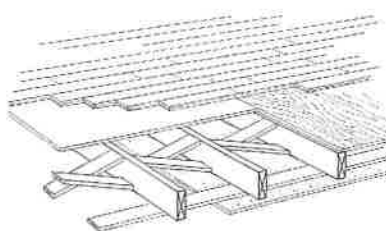

Plank Flooring

Wood Strip Flooring

Tile Flooring

Wood Plank Flooring		Unit	Material	Labor	Equip.	Total	Specification
Maple							
2-1/4"							
	Demolish	S.F.		1.80		1.80	Includes material and labor to install unfinished T&G maple flooring, 25/32" thick, 2-1/4" wide, random 3' to 16' lengths including felt underlayment, nailed in place over prepared subfloor.
	Install	S.F.	3.57	2.68		6.25	
	Demolish and Install	S.F.	3.57	4.48		8.05	
	Reinstall	S.F.		2.14		2.14	
	Clean	S.F.		.51		.51	
	Paint	S.F.	.37	3.11		3.48	
	Minimum Charge	Job		269		269	
3-1/4"							
	Demolish	S.F.		1.80		1.80	Includes material and labor to install unfinished T&G maple flooring, 33/32" thick, 3-1/4" wide, random 3' to 16' lengths including felt underlayment, nailed in place over prepared subfloor.
	Install	S.F.	5.10	2.68		7.78	
	Demolish and Install	S.F.	5.10	4.48		9.58	
	Reinstall	S.F.		2.14		2.14	
	Clean	S.F.		.51		.51	
	Paint	S.F.	.37	3.11		3.48	
	Minimum Charge	Job		269		269	
Sand and Finish							
	Install	S.F.	.37	1.01		1.38	Includes labor and material to refinish wood floor.
	Minimum Charge	Job		269		269	
Oak							
2-1/4"							
	Demolish	S.F.		1.80		1.80	Includes material and labor to install unfinished T&G oak flooring, 25/32" thick, 2-1/4" wide, random 3' to 16' lengths including felt underlayment, nailed in place over prepared subfloor.
	Install	S.F.	6.80	2.68		9.48	
	Demolish and Install	S.F.	6.80	4.48		11.28	
	Reinstall	S.F.		2.14		2.14	
	Clean	S.F.		.51		.51	
	Paint	S.F.	.37	3.11		3.48	
	Minimum Charge	Job		269		269	
3-1/4"							
	Demolish	S.F.		1.80		1.80	Includes material and labor to install unfinished T&G oak flooring, 25/32" thick, 3-1/4" wide, random 3' to 16' lengths including felt underlayment, nailed in place over prepared subfloor.
	Install	S.F.	5	1.90		6.90	
	Demolish and Install	S.F.	5	3.70		8.70	
	Reinstall	S.F.		1.52		1.52	
	Clean	S.F.		.51		.51	
	Paint	S.F.	.37	3.11		3.48	
	Minimum Charge	Job		269		269	
Sand and Finish							
	Install	S.F.	.37	3.11		3.48	Includes labor and material to refinish wood floor.
	Minimum Charge	Job		269		269	

Flooring

Wood Plank Flooring		Unit	Material	Labor	Equip.	Total	Specification
Walnut							
3" to 7"							
	Demolish	S.F.		1.80		1.80	Includes material and labor to install unfinished T&G walnut flooring, 25/32" thick, random 3' to 16' lengths including felt underlayment, nailed in place over prepared subfloor.
	Install	S.F.	5.65	1.90		7.55	
	Demolish and Install	S.F.	5.65	3.70		9.35	
	Reinstall	S.F.		1.52		1.52	
	Clean	S.F.		.51		.51	
	Paint	S.F.	.37	3.11		3.48	
	Minimum Charge	Job		269		269	
Sand and Finish							
	Install	S.F.	.37	3.11		3.48	Includes labor and material to refinish wood floor.
	Minimum Charge	Job		269		269	
Pine							
2-1/4"							
	Demolish	S.F.		1.80		1.80	Includes material and labor to install unfinished T&G pine flooring, 25/32" thick, 2-1/4" wide, random 3' to 16' lengths including felt underlayment, nailed in place over prepared subfloor.
	Install	S.F.	2.83	2.02		4.85	
	Demolish and Install	S.F.	2.83	3.82		6.65	
	Reinstall	S.F.		1.62		1.62	
	Clean	S.F.		.51		.51	
	Paint	S.F.	.37	1.01		1.38	
	Minimum Charge	Job		269		269	
Sand and Finish							
	Install	S.F.	.37	3.11		3.48	Includes labor and material to refinish wood floor.
	Minimum Charge	Job		269		269	
Prefinished Oak							
2-1/4"							
	Demolish	S.F.		1.80		1.80	Includes material and labor to install prefinished T&G oak flooring, 2-1/4" wide, random 3' to 16' lengths including felt underlayment, nailed in place over prepared subfloor.
	Install	S.F.	5.40	2.68		8.08	
	Demolish and Install	S.F.	5.40	4.48		9.88	
	Reinstall	S.F.		2.14		2.14	
	Clean	S.F.		.51		.51	
	Minimum Charge	Job		269		269	
3-1/4"							
	Demolish	S.F.		1.80		1.80	Includes material and labor to install prefinished T&G oak flooring, 25/32" thick, 3" to 7" wide, random 3' to 16' lengths including felt underlayment, nailed in place over prepared subfloor.
	Install	S.F.	5.15	2.46		7.61	
	Demolish and Install	S.F.	5.15	4.26		9.41	
	Reinstall	S.F.		1.97		1.97	
	Clean	S.F.		.51		.51	
	Minimum Charge	Job		269		269	
Sand and Finish New							
	Install	S.F.	.37	1.37		1.74	Includes labor and material to refinish wood floor.
	Minimum Charge	Job		269		269	
Refinish Existing							
	Install	S.F.	.37	1.01		1.38	Includes labor and material to refinish wood floor.
	Minimum Charge	Job		269		269	

Flooring

Wood Plank Flooring		Unit	Material	Labor	Equip.	Total	Specification
Urethane Coat	Install	S.F.	.20	.23		.43	Includes labor and material to install two coats of urethane, on existing floor.
	Minimum Charge	Job		269		269	
Clean and Wax	Clean	S.F.	.03	.32		.35	Includes labor and material to wash and wax hardwood.
	Minimum Charge	Job		269		269	
Underlayment Per S.F.	Demolish	S.F.		.79		.79	Cost includes material and labor to install 1/4" luan subfloor, standard interior grade, nailed every 6".
	Install	S.F.	.68	.72		1.40	
	Demolish and Install	S.F.	.68	1.51		2.19	
	Clean	S.F.		.39		.39	
	Minimum Charge	Job		269		269	

Wood Parquet Tile Floor		Unit	Material	Labor	Equip.	Total	Specification
Oak 9" x 9"	Demolish	S.F.		1.33		1.33	Includes material and labor to install prefinished oak 9" x 9" parquet block flooring, 5/16" thick, installed in mastic.
	Install	S.F.	16.45	4.30		20.75	
	Demolish and Install	S.F.	16.45	5.63		22.08	
	Reinstall	S.F.		3.44		3.44	
	Clean	S.F.		.51		.51	
	Paint	S.F.	.37	3.11		3.48	
	Minimum Charge	Job		269		269	
	13" x 13"						
	Demolish	S.F.		1.33		1.33	
	Install	S.F.	17.70	3.36		21.06	
Cherry 9" x 9"	Demolish and Install	S.F.	17.70	4.69		22.39	Includes material and labor to install prefinished cherry 9" x 9" parquet block flooring, 5/16" thick, installed in mastic.
	Reinstall	S.F.		2.69		2.69	
	Clean	S.F.		.51		.51	
	Paint	S.F.	.37	3.11		3.48	
	Minimum Charge	Job		269		269	
	13" x 13"						
	Demolish	S.F.		1.33		1.33	
	Install	S.F.	24	4.30		28.30	
	Demolish and Install	S.F.	24	5.63		29.63	
	Reinstall	S.F.		4.30		4.30	
Cherry 13" x 13"	Clean	S.F.		.51		.51	Includes material and labor to install prefinished cherry 13" x 13" parquet block flooring, 5/16" thick, installed in mastic.
	Paint	S.F.	.37	3.11		3.48	
	Minimum Charge	Job		269		269	
	Demolish	S.F.		1.33		1.33	
	Install	S.F.	24	3.36		27.36	
	Demolish and Install	S.F.	24	4.69		28.69	
	Reinstall	S.F.		3.36		3.36	
	Clean	S.F.		.51		.51	
	Paint	S.F.	.37	3.11		3.48	
	Minimum Charge	Job		269		269	

Flooring

Wood Parquet Tile Floor		Unit	Material	Labor	Equip.	Total	Specification
Walnut							
9" x 9"							
	Demolish	S.F.		1.33		1.33	Includes material and labor to install prefinished walnut 9" x 9" parquet flooring in mastic.
	Install	S.F.	24	4.30		28.30	
	Demolish and Install	S.F.	24	5.63		29.63	
	Reinstall	S.F.		3.44		3.44	
	Clean	S.F.		.51		.51	
	Paint	S.F.	.37	3.11		3.48	
	Minimum Charge	Job		269		269	
13" x 13"							
	Demolish	S.F.		1.33		1.33	Includes material and labor to install prefinished walnut 13" x 13" parquet block flooring, 5/16" thick, installed in mastic.
	Install	S.F.	24	3.36		27.36	
	Demolish and Install	S.F.	24	4.69		28.69	
	Reinstall	S.F.		3.36		3.36	
	Clean	S.F.		.51		.51	
	Paint	S.F.	.37	3.11		3.48	
	Minimum Charge	Job		269		269	
Acrylic Impregnated							
Oak 12" x 12"							
	Demolish	S.F.		1.33		1.33	Includes material and labor to install red oak 12" x 12" acrylic impregnated parquet block flooring, 5/16" thick, installed in mastic.
	Install	S.F.	15.95	3.84		19.79	
	Demolish and Install	S.F.	15.95	5.17		21.12	
	Reinstall	S.F.		3.84		3.84	
	Clean	S.F.		.51		.51	
	Minimum Charge	Job		269		269	
Cherry 12" x 12"							
	Demolish	S.F.		1.33		1.33	Includes material and labor to install prefinished cherry 12" x 12" acrylic impregnated parquet block flooring, 5/16" thick, installed in mastic.
	Install	S.F.	24	3.84		27.84	
	Demolish and Install	S.F.	24	5.17		29.17	
	Reinstall	S.F.		3.84		3.84	
	Clean	S.F.		.51		.51	
	Minimum Charge	Job		269		269	
Ash 12" x 12"							
	Demolish	S.F.		1.33		1.33	Includes material and labor to install ash 12" x 12" acrylic impregnated parquet block flooring, 5/16" thick in mastic.
	Install	S.F.	37.50	3.84		41.34	
	Demolish and Install	S.F.	37.50	5.17		42.67	
	Reinstall	S.F.		3.84		3.84	
	Clean	S.F.		.51		.51	
	Minimum Charge	Job		269		269	
Teak							
	Demolish	S.F.		1.33		1.33	Includes material and labor to install prefinished teak parquet block flooring, 5/16" thick, and installed in mastic.
	Install	S.F.	13.05	3.36		16.41	
	Demolish and Install	S.F.	13.05	4.69		17.74	
	Reinstall	S.F.		3.36		3.36	
	Clean	S.F.		.51		.51	
	Paint	S.F.	.37	3.11		3.48	
	Minimum Charge	Job		269		269	
Clean and Wax							
	Clean	S.F.	.03	.32		.35	Includes labor and material to wash and wax hardwood.
	Minimum Charge	Job		269		269	

Flooring

Ceramic Tile Flooring		Unit	Material	Labor	Equip.	Total	Specification
Economy Grade							
	Demolish	S.F.		1.33		1.33	Cost includes material and labor to install 4-1/4" x 4-1/4" ceramic tile in mortar bed including grout.
	Install	S.F.	6.30	10.25		16.55	
	Demolish and Install	S.F.	6.30	11.58		17.88	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		261		261	
Average Grade							
	Demolish	S.F.		1.33		1.33	Cost includes material and labor to install 4-1/4" x 4-1/4" ceramic tile in mortar bed including grout.
	Install	S.F.	8.60	10.45		19.05	
	Demolish and Install	S.F.	8.60	11.78		20.38	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		261		261	
Premium Grade							
	Demolish	S.F.		1.33		1.33	Cost includes material and labor to install 4-1/4" x 4-1/4" ceramic tile in mortar bed including grout.
	Install	S.F.	15.80	10.45		26.25	
	Demolish and Install	S.F.	15.80	11.78		27.58	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		261		261	
Re-grout							
	Install	S.F.	.08	4.18		4.26	Includes material and labor to regrout tile floors.
	Minimum Charge	Job		261		261	

Hard Tile Flooring		Unit	Material	Labor	Equip.	Total	Specification
Thick Set Paver							
Brick							
	Demolish	S.F.		2.81		2.81	Cost includes material and labor to install 6" x 12" adobe brick paver with 1/2" mortar joints.
	Install	S.F.	3.42	23.50		26.92	
	Demolish and Install	S.F.	3.42	26.31		29.73	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		261		261	
Mexican Red							
	Demolish	S.F.		2.81		2.81	Cost includes material and labor to install 12" x 12" red Mexican paver tile in mortar bed with grout.
	Install	S.F.	3.49	10.90		14.39	
	Demolish and Install	S.F.	3.49	13.71		17.20	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		261		261	
Saltillo							
	Demolish	S.F.		1.33		1.33	Cost includes material and labor to install 12" x 12" saltillo tile in mortar bed with grout.
	Install	S.F.	4.76	10.90		15.66	
	Demolish and Install	S.F.	4.76	12.23		16.99	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		261		261	
Marble							
Premium Grade							
	Demolish	S.F.		1.33		1.33	Cost includes material and labor to install 3/8" x 12" x 12" marble, in mortar bed with grout.
	Install	S.F.	22	22.50		44.50	
	Demolish and Install	S.F.	22	23.83		45.83	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		261		261	

Flooring

Hard Tile Flooring		Unit	Material	Labor	Equip.	Total	Specification
Terrazzo							
Gray Cement							
	Demolish	S.F.		1.78		1.78	Cost includes material and labor to install 1-3/4" terrazzo, #1 and #2 chips in gray Portland cement.
	Install	S.F.	5.30	12.65	5.50	23.45	
	Demolish and Install	S.F.	5.30	14.43	5.50	25.23	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		475	206	681	
White Cement							
	Demolish	S.F.		1.78		1.78	Cost includes material and labor to install 1-3/4" terrazzo, #1 and #2 chips in white Portland cement.
	Install	S.F.	6.20	12.65	5.50	24.35	
	Demolish and Install	S.F.	6.20	14.43	5.50	26.13	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		475	206	681	
Non-skid Gray							
	Demolish	S.F.		1.78		1.78	Cost includes material and labor to install 1-3/4" terrazzo, #1 and #2 chips in gray Portland cement with light non-skid abrasive.
	Install	S.F.	9.80	15.80	6.85	32.45	
	Demolish and Install	S.F.	9.80	17.58	6.85	34.23	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		475	206	681	
Non-skid White							
	Demolish	S.F.		1.78		1.78	Cost includes material and labor to install 1-3/4" terrazzo, #1 and #2 chips in white Portland cement with light non-skid abrasive.
	Install	S.F.	10.85	15.80	6.85	33.50	
	Demolish and Install	S.F.	10.85	17.58	6.85	35.28	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		475	206	681	
Gray w / Brass Divider							
	Demolish	S.F.		1.80		1.80	Cost includes material and labor to install 1-3/4" terrazzo, #1 and #2 chips in gray Portland cement with brass strips 2' O.C. each way.
	Install	S.F.	15.35	17.25	7.50	40.10	
	Demolish and Install	S.F.	15.35	19.05	7.50	41.90	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		475	206	681	
Clean							
	Clean	S.F.	.14	.51		.65	Includes labor and material to clean terrazzo flooring.
	Minimum Charge	Job		475	206	681	
Slate							
	Demolish	S.F.		1.61		1.61	Includes material and labor to install slate tile flooring in thin set with grout.
	Install	S.F.	5.50	5.15		10.65	
	Demolish and Install	S.F.	5.50	6.76		12.26	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		261		261	
Granite							
	Demolish	S.F.		1.32		1.32	Includes material and labor to install granite tile flooring in thin set with grout.
	Install	S.F.	23.50	5.20		28.70	
	Demolish and Install	S.F.	23.50	6.52		30.02	
	Reinstall	S.F.		5.22		5.22	
	Clean	S.F.		.77		.77	
	Minimum Charge	Job		261		261	
Re-grout							
	Install	S.F.	.08	4.18		4.26	Includes material and labor to regrout tile floors.
	Minimum Charge	Job		261		261	

Flooring

Sheet Vinyl Per S.F.		Unit	Material	Labor	Equip.	Total	Specification
Economy Grade							
	Demolish	S.F.		.64		.64	Includes material and labor to install resilient sheet vinyl flooring.
	Install	S.F.	5.55	1.63		7.18	
	Demolish and Install	S.F.	5.55	2.27		7.82	
	Clean	S.F.		.51		.51	
	Minimum Charge	Job		261		261	
Average Grade							
	Demolish	S.F.		.64		.64	Includes material and labor to install resilient sheet vinyl flooring.
	Install	S.F.	2.47	1.63		4.10	
	Demolish and Install	S.F.	2.47	2.27		4.74	
	Clean	S.F.		.51		.51	
	Minimum Charge	Job		261		261	
Premium Grade							
	Demolish	S.F.		.64		.64	Includes material and labor to install resilient sheet vinyl flooring.
	Install	S.F.	1.01	1.63		2.64	
	Demolish and Install	S.F.	1.01	2.27		3.28	
	Clean	S.F.		.51		.51	
	Minimum Charge	Job		261		261	
Clean and Wax							
	Clean	S.F.	.03	.56		.59	Includes labor and material to wash and wax a vinyl tile floor.
	Minimum Charge	Job		261		261	

Sheet Vinyl		Unit	Material	Labor	Equip.	Total	Specification
Economy Grade							
	Demolish	S.Y.		5.80		5.80	Includes material and labor to install no wax sheet vinyl flooring.
	Install	S.Y.	50	14.70		64.70	
	Demolish and Install	S.Y.	50	20.50		70.50	
	Clean	S.Y.		4.55		4.55	
	Minimum Charge	Job		261		261	
Average Grade							
	Demolish	S.Y.		5.80		5.80	Includes material and labor to install no wax sheet vinyl flooring.
	Install	S.Y.	22	14.70		36.70	
	Demolish and Install	S.Y.	22	20.50		42.50	
	Clean	S.Y.		4.55		4.55	
	Minimum Charge	Job		261		261	
Premium Grade							
	Demolish	S.Y.		5.80		5.80	Includes material and labor to install no wax sheet vinyl flooring.
	Install	S.Y.	9.10	14.70		23.80	
	Demolish and Install	S.Y.	9.10	20.50		29.60	
	Clean	S.Y.		4.55		4.55	
	Minimum Charge	Job		261		261	
Clean and Wax							
	Clean	S.F.	.03	.56		.59	Includes labor and material to wash and wax a vinyl tile floor.
	Minimum Charge	Job		261		261	

Vinyl Tile		Unit	Material	Labor	Equip.	Total	Specification
Economy Grade							
	Demolish	S.F.		.90		.90	Includes material and labor to install no wax 12" x 12" vinyl tile.
	Install	S.F.	2.34	1.04		3.38	
	Demolish and Install	S.F.	2.34	1.94		4.28	
	Clean	S.F.		.51		.51	
	Minimum Charge	Job		261		261	

Flooring

Vinyl Tile		Unit	Material	Labor	Equip.	Total	Specification
Average Grade							
	Demolish	S.F.		.90		.90	Includes material and labor to install no wax 12" x 12" vinyl tile.
	Install	S.F.	2.42	1.04		3.46	
	Demolish and Install	S.F.	2.42	1.94		4.36	
	Clean	S.F.		.51		.51	
	Minimum Charge	Job		261		261	
Premium Grade							
	Demolish	S.F.		.90		.90	Includes material and labor to install no wax 12" x 12" vinyl tile.
	Install	S.F.	3.80	1.04		4.84	
	Demolish and Install	S.F.	3.80	1.94		5.74	
	Clean	S.F.		.51		.51	
	Minimum Charge	Job		261		261	
Clean and Wax							
	Clean	S.F.	.03	.56		.59	Includes labor and material to wash and wax a vinyl tile floor.
	Minimum Charge	Job		261		261	

Carpeting Per S.F.		Unit	Material	Labor	Equip.	Total	Specification
Economy Grade							
	Demolish	S.F.		.10		.10	Includes material and labor to install carpet including tack strips and hot melt tape on seams.
	Install	S.F.	1.45	.77		2.22	
	Demolish and Install	S.F.	1.45	.87		2.32	
	Clean	S.F.		.70		.70	
	Minimum Charge	Job		261		261	
Average Grade							
	Demolish	S.F.		.10		.10	Includes material and labor to install carpet including tack strips and hot melt tape on seams.
	Install	S.F.	1.45	.77		2.22	
	Demolish and Install	S.F.	1.45	.87		2.32	
	Clean	S.F.		.70		.70	
	Minimum Charge	Job		261		261	
Premium Grade							
	Demolish	S.F.		.10		.10	Includes material and labor to install carpet including tack strips and hot melt tape on seams.
	Install	S.F.	2.30	.77		3.07	
	Demolish and Install	S.F.	2.30	.87		3.17	
	Clean	S.F.		.70		.70	
	Minimum Charge	Job		261		261	
Indoor/Outdoor							
	Demolish	S.F.		.10		.10	Includes material and labor to install indoor-outdoor carpet.
	Install	S.F.	1.19	.77		1.96	
	Demolish and Install	S.F.	1.19	.87		2.06	
	Clean	S.F.		.70		.70	
	Minimum Charge	Job		261		261	
100% Wool							
Average Grade							
	Demolish	S.F.		.10		.10	Includes material and labor to install carpet including tack strips and hot melt tape on seams.
	Install	S.F.	9	1.04		10.04	
	Demolish and Install	S.F.	9	1.14		10.14	
	Clean	S.F.		.70		.70	
	Minimum Charge	Job		261		261	
Premium Grade							
	Demolish	S.F.		.10		.10	Includes material and labor to install carpet including tack strips and hot melt tape on seams.
	Install	S.F.	13.10	1.04		14.14	
	Demolish and Install	S.F.	13.10	1.14		14.24	
	Clean	S.F.		.70		.70	
	Minimum Charge	Job		261		261	

Flooring

Carpeting Per S.F.		Unit	Material	Labor	Equip.	Total	Specification
Luxury Grade							
	Demolish	S.F.		.10		.10	Includes material and labor to install carpet including tack strips and hot melt tape on seams.
	Install	S.F.	13.50	1.04		14.54	
	Demolish and Install	S.F.	13.50	1.14		14.64	
	Clean	S.F.		.70		.70	
	Minimum Charge	Job		261		261	
Berber							
Average Grade							
	Demolish	S.F.		.10		.10	Includes material and labor to install carpet including tack strips and hot melt tape on seams.
	Install	S.F.	8	1.23		9.23	
	Demolish and Install	S.F.	8	1.33		9.33	
	Clean	S.F.		.70		.70	
	Minimum Charge	Job		261		261	
Premium Grade							
	Demolish	S.F.		.10		.10	Includes material and labor to install carpet including tack strips and hot melt tape on seams.
	Install	S.F.	9	1.23		10.23	
	Demolish and Install	S.F.	9	1.33		10.33	
	Clean	S.F.		.70		.70	
	Minimum Charge	Job		261		261	

Carpeting		Unit	Material	Labor	Equip.	Total	Specification
Indoor/Outdoor							
	Demolish	S.Y.		1.50		1.50	Includes material and labor to install indoor-outdoor carpet.
	Install	S.Y.	10.65	6.95		17.60	
	Demolish and Install	S.Y.	10.65	8.45		19.10	
	Reinstall	S.Y.		5.57		5.57	
	Clean	S.Y.		6.35		6.35	
	Minimum Charge	Job		261		261	
Economy Grade							
	Demolish	S.Y.		1.50		1.50	Includes material and labor to install carpet including tack strips and hot melt tape on seams.
	Install	S.Y.	13.10	6.95		20.05	
	Demolish and Install	S.Y.	13.10	8.45		21.55	
	Reinstall	S.Y.		5.57		5.57	
	Clean	S.Y.		6.35		6.35	
	Minimum Charge	Job		261		261	
Average Grade							
	Demolish	S.Y.		1.50		1.50	Includes material and labor to install carpet including tack strips and hot melt tape on seams.
	Install	S.Y.	13.10	6.95		20.05	
	Demolish and Install	S.Y.	13.10	8.45		21.55	
	Reinstall	S.Y.		5.57		5.57	
	Clean	S.Y.		6.35		6.35	
	Minimum Charge	Job		261		261	
Premium Grade							
	Demolish	S.Y.		1.50		1.50	Includes material and labor to install carpet including tack strips and hot melt tape on seams.
	Install	S.Y.	20.50	6.95		27.45	
	Demolish and Install	S.Y.	20.50	8.45		28.95	
	Reinstall	S.Y.		5.57		5.57	
	Clean	S.Y.		6.35		6.35	
	Minimum Charge	Job		261		261	

Flooring

Carpeting		Unit	Material	Labor	Equip.	Total	Specification
100% Wool							
Average Grade							
	Demolish	S.Y.		1.50		1.50	Includes material and labor to install wool carpet including tack strips and hot melt tape on seams.
	Install	S.Y.	81.50	9.30		90.80	
	Demolish and Install	S.Y.	81.50	10.80		92.30	
	Reinstall	S.Y.		7.46		7.46	
	Clean	S.Y.		6.35		6.35	
	Minimum Charge	Job		261		261	
Premium Grade							
	Demolish	S.Y.		1.50		1.50	Includes material and labor to install carpet including tack strips and hot melt tape on seams.
	Install	S.Y.	118	9.30		127.30	
	Demolish and Install	S.Y.	118	10.80		128.80	
	Reinstall	S.Y.		7.46		7.46	
	Clean	S.Y.		6.35		6.35	
	Minimum Charge	Job		261		261	
Luxury Grade							
	Demolish	S.Y.		1.50		1.50	Includes material and labor to install carpet including tack strips and hot melt tape on seams.
	Install	S.Y.	121	9.30		130.30	
	Demolish and Install	S.Y.	121	10.80		131.80	
	Reinstall	S.Y.		7.46		7.46	
	Clean	S.Y.		6.35		6.35	
	Minimum Charge	Job		261		261	
Berber							
Average Grade							
	Demolish	S.Y.		1.50		1.50	Includes material and labor to install berber carpet including tack strips and hot melt tape on seams.
	Install	S.Y.	72	11.10		83.10	
	Demolish and Install	S.Y.	72	12.60		84.60	
	Reinstall	S.Y.		8.89		8.89	
	Clean	S.Y.		6.35		6.35	
	Minimum Charge	Job		261		261	
Premium Grade							
	Demolish	S.Y.		1.50		1.50	Includes material and labor to install carpet including tack strips and hot melt tape on seams.
	Install	S.Y.	81	11.10		92.10	
	Demolish and Install	S.Y.	81	12.60		93.60	
	Reinstall	S.Y.		8.89		8.89	
	Clean	S.Y.		6.35		6.35	
	Minimum Charge	Job		261		261	

Carpet Pad Per S.F.		Unit	Material	Labor	Equip.	Total	Specification
Urethane							
	Demolish	S.F.		.03		.03	Includes material and labor to install urethane carpet pad.
	Install	S.F.	.54	.39		.93	
	Demolish and Install	S.F.	.54	.42		.96	
	Minimum Charge	Job		261		261	
Foam Rubber Slab							
	Demolish	S.F.		.03		.03	Includes material and labor to install carpet pad, 3/8" thick foam rubber.
	Install	S.F.	.79	.39		1.18	
	Demolish and Install	S.F.	.79	.42		1.21	
	Minimum Charge	Job		261		261	
Waffle							
	Demolish	S.F.		.03		.03	Includes material and labor to install rubber waffle carpet pad.
	Install	S.F.	.96	.04		1	
	Demolish and Install	S.F.	.96	.07		1.03	
	Minimum Charge	Job		261		261	

Flooring

Carpet Pad Per S.F.		Unit	Material	Labor	Equip.	Total	Specification
Jute	Demolish	S.F.		.03		.03	Includes material and labor to install jute hair carpet pad.
	Install	S.F.	.91	.34		1.25	
	Demolish and Install	S.F.	.91	.37		1.28	
	Minimum Charge	Job		261		261	
Rebound	Demolish	S.F.		.03		.03	Includes material and labor to install rebound carpet pad.
	Install	S.F.	.53	.29		.82	
	Demolish and Install	S.F.	.53	.32		.85	
	Minimum Charge	Job		261		261	


Carpet Pad		Unit	Material	Labor	Equip.	Total	Specification
Urethane	Demolish	S.Y.		.26		.26	Includes material and labor to install urethane carpet pad.
	Install	S.Y.	4.81	3.48		8.29	
	Demolish and Install	S.Y.	4.81	3.74		8.55	
	Reinstall	S.Y.		2.78		2.78	
	Minimum Charge	Job		261		261	
Foam Rubber Slab	Demolish	S.Y.		.26		.26	Includes material and labor to install rubber slab carpet pad.
	Install	S.Y.	7.15	3.48		10.63	
	Demolish and Install	S.Y.	7.15	3.74		10.89	
	Reinstall	S.Y.		2.78		2.78	
	Minimum Charge	Job		261		261	
Waffle	Demolish	S.Y.		.26		.26	Includes material and labor to install rubber waffle carpet pad.
	Install	S.Y.	8.65	.39		9.04	
	Demolish and Install	S.Y.	8.65	.65		9.30	
	Reinstall	S.Y.		.31		.31	
	Minimum Charge	Job		261		261	
Jute	Demolish	S.Y.		.26		.26	Includes material and labor to install jute hair carpet pad.
	Install	S.Y.	8.20	3.07		11.27	
	Demolish and Install	S.Y.	8.20	3.33		11.53	
	Reinstall	S.Y.		2.46		2.46	
	Minimum Charge	Job		261		261	
Rebound	Demolish	S.Y.		.26		.26	Includes material and labor to install rebound carpet pad.
	Install	S.Y.	4.71	2.60		7.31	
	Demolish and Install	S.Y.	4.71	2.86		7.57	
	Reinstall	S.Y.		2.08		2.08	
	Minimum Charge	Job		261		261	

Stair Components		Unit	Material	Labor	Equip.	Total	Specification
Carpeting	Demolish	Ea.		2.73		2.73	Includes material and labor to install carpet and pad on stairs.
	Install	Riser	64.50	13.75		78.25	
	Demolish and Install	Riser	64.50	16.48		80.98	
	Reinstall	Riser		10.99		10.99	
	Clean	Ea.		6.35		6.35	
	Minimum Charge	Job		261		261	

Finish Mechanical



Tub/Shower

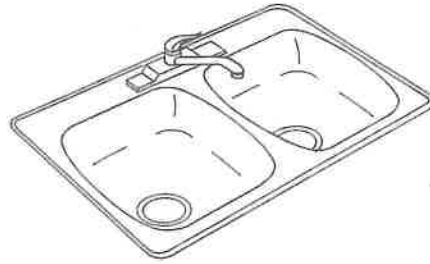

Stainless Steel Double Sink



Water Closet

Commode		Unit	Material	Labor	Equip.	Total	Specification
Floor Mounted w / Tank							
	Demolish	Ea.		60.50		60.50	Includes material and labor to install a toilet with valve, seat and cover.
	Install	Ea.	241	205		446	
	Demolish and Install	Ea.	241	265.50		506.50	
	Reinstall	Ea.		163.82		163.82	
	Clean	Ea.	.33	20		20.33	
	Minimum Charge	Job		300		300	
Wall w / Flush Valve							
	Demolish	Ea.		60.50		60.50	Includes material and labor to install a wall hung toilet with flush valve, seat and cover.
	Install	Ea.	1200	187		1387	
	Demolish and Install	Ea.	1200	247.50		1447.50	
	Reinstall	Ea.		149.69		149.69	
	Clean	Ea.	.33	20		20.33	
	Minimum Charge	Job		300		300	
Designer Floor Mount							
	Demolish	Ea.		60.50		60.50	Includes material and labor to install a toilet with valve, seat and cover.
	Install	Ea.	1075	205		1280	
	Demolish and Install	Ea.	1075	265.50		1340.50	
	Reinstall	Ea.		163.82		163.82	
	Clean	Ea.	.33	20		20.33	
	Minimum Charge	Job		300		300	
Urinal							
	Demolish	Ea.		60.50		60.50	Includes material and labor to install a wall hung urinal with flush valve.
	Install	Ea.	500	360		860	
	Demolish and Install	Ea.	500	420.50		920.50	
	Reinstall	Ea.		289.41		289.41	
	Clean	Ea.	.33	20		20.33	
	Minimum Charge	Job		300		300	
Bidet							
Vitreous China							
	Demolish	Ea.		60.50		60.50	Includes material and labor to install a vitreous china bidet complete with trim.
	Install	Ea.	840	217		1057	
	Demolish and Install	Ea.	840	277.50		1117.50	
	Reinstall	Ea.		173.64		173.64	
	Clean	Ea.	.33	20		20.33	
	Minimum Charge	Job		300		300	

Finish Mechanical

Commode		Unit	Material	Labor	Equip.	Total	Specification
Chrome Fittings	Install	Ea.	300	75.50		375.50	Includes labor and materials to install chrome fittings for a bidet.
Brass Fittings	Install	Ea.	330	75.50		405.50	Includes labor and materials to install brass fittings for a bidet.
Seat	Demolish	Ea.		25		25	Includes material and labor to install a toilet seat and cover.
	Install	Ea.	43.50	25		68.50	
	Demolish and Install	Ea.	43.50	50		93.50	
	Reinstall	Ea.		20.09		20.09	
	Clean	Ea.	.17	8.45		8.62	
	Minimum Charge	Job		300		300	
Rough-in		Install	Ea.	390	380	770	Includes labor and materials to install water supply pipe with valves and drain, waste and vent pipe with all couplings, hangers and fasteners necessary.

Sink (assembly)		Unit	Material	Labor	Equip.	Total	Specification
Single Porcelain	Demolish	Ea.		37.50		37.50	Includes material and labor to install a single bowl enamel finished cast iron kitchen sink with faucet and drain.
	Install	Ea.	680	194		874	
	Demolish and Install	Ea.	680	231.50		911.50	
	Reinstall	Ea.		155.04		155.04	
	Clean	Ea.	.01	1.59		1.60	
	Minimum Charge	Job		300		300	
Stainless Steel	Demolish	Ea.		37.50		37.50	Includes material and labor to install a single bowl stainless steel kitchen sink with faucet and drain.
	Install	Ea.	585	194		779	
	Demolish and Install	Ea.	585	231.50		816.50	
	Reinstall	Ea.		155.04		155.04	
	Clean	Ea.	.01	1.59		1.60	
	Minimum Charge	Job		300		300	
Double Porcelain	Demolish	Ea.		43		43	Includes material and labor to install a double bowl enamel finished cast iron kitchen sink with faucet and drain.
	Install	Ea.	800	226		1026	
	Demolish and Install	Ea.	800	269		1069	
	Reinstall	Ea.		180.88		180.88	
	Clean	Ea.	.33	20		20.33	
	Minimum Charge	Job		300		300	
Stainless Steel	Demolish	Ea.		43		43	Includes material and labor to install a double bowl stainless steel kitchen sink with faucet and drain.
	Install	Ea.	286	226		512	
	Demolish and Install	Ea.	286	269		555	
	Reinstall	Ea.		180.88		180.88	
	Clean	Ea.	.33	20		20.33	
	Minimum Charge	Job		300		300	
Bar	Demolish	Ea.		37.50		37.50	Includes material and labor to install a small single bowl stainless steel bar / vegetable / kitchen sink with faucet and drain.
	Install	Ea.	365	151		516	
	Demolish and Install	Ea.	365	188.50		553.50	
	Reinstall	Ea.		120.56		120.56	
	Clean	Ea.	.01	1.59		1.60	
	Minimum Charge	Job		300		300	

Finish Mechanical

Sink (assembly)		Unit	Material	Labor	Equip.	Total	Specification
Floor	Demolish	Ea.		121		121	Includes material and labor to install an enameled cast iron floor mounted corner service sink with faucet and drain.
	Install	Ea.	1750	247		1997	
	Demolish and Install	Ea.	1750	368		2118	
	Reinstall	Ea.		197.32		197.32	
	Clean	Ea.	.33	10.10		10.43	
Minimum Charge		Job		300		300	
Pedestal	Demolish	Ea.		37.50		37.50	Includes material and labor to install a vitreous china pedestal lavatory with faucet set and pop-up drain.
	Install	Ea.	425	170		595	
	Demolish and Install	Ea.	425	207.50		632.50	
	Reinstall	Ea.		135.66		135.66	
	Clean	Ea.	.01	1.59		1.60	
Minimum Charge		Job		300		300	
Vanity Lavatory	Demolish	Ea.		37.50		37.50	Includes material and labor to install a vitreous china lavatory with faucet set and pop-up drain.
	Install	Ea.	242	201		443	
	Demolish and Install	Ea.	242	238.50		480.50	
	Reinstall	Ea.		160.78		160.78	
	Clean	Ea.	.01	1.59		1.60	
Minimum Charge		Job		300		300	
Rough-in	Install	Ea.	335	505		840	Includes labor and materials to install copper supply pipe with valves and drain, waste and vent pipe with all couplings, hangers and fasteners necessary.
Laundry	Demolish	Ea.		40.50		40.50	Includes material and labor to install a laundry sink (wall mounted or with legs) including faucet and pop up drain.
	Install	Ea.	188	167		355	
	Demolish and Install	Ea.	188	207.50		395.50	
	Clean	Ea.	.01	1.59		1.60	
	Minimum Charge	Job		300		300	

Sink Only		Unit	Material	Labor	Equip.	Total	Specification
Single Porcelain	Demolish	Ea.		37.50		37.50	Includes material and labor to install a single bowl enamel finished cast iron kitchen sink.
	Install	Ea.	550	215		765	
	Demolish and Install	Ea.	550	252.50		802.50	
	Reinstall	Ea.		172.23		172.23	
	Clean	Ea.	.01	1.59		1.60	
Minimum Charge		Job		300		300	
Stainless Steel	Demolish	Ea.		37.50		37.50	Includes material and labor to install a single bowl stainless steel kitchen sink.
	Install	Ea.	445	151		596	
	Demolish and Install	Ea.	445	188.50		633.50	
	Reinstall	Ea.		120.56		120.56	
	Clean	Ea.	.01	1.59		1.60	
Minimum Charge		Job		300		300	

Finish Mechanical

Sink Only		Unit	Material	Labor	Equip.	Total	Specification
Double Porcelain	Demolish	Ea.		43		43	Includes material and labor to install a double bowl enamel finished cast iron kitchen sink.
	Install	Ea.	645	251		896	
	Demolish and Install	Ea.	645	294		939	
	Reinstall	Ea.		200.93		200.93	
	Clean	Ea.	.33	20		20.33	
	Minimum Charge	Job		300		300	
Stainless Steel	Demolish	Ea.		43		43	Includes material and labor to install a double bowl stainless steel kitchen sink.
	Install	Ea.	495	194		689	
	Demolish and Install	Ea.	495	237		732	
	Reinstall	Ea.		155.56		155.56	
	Clean	Ea.	.33	20		20.33	
	Minimum Charge	Job		300		300	
Bar	Demolish	Ea.		37.50		37.50	Includes material and labor to install a small single bowl stainless steel bar / vegetable / kitchen sink.
	Install	Ea.	235	151		386	
	Demolish and Install	Ea.	235	188.50		423.50	
	Reinstall	Ea.		120.56		120.56	
	Clean	Ea.	.01	1.59		1.60	
	Minimum Charge	Job		300		300	
Floor	Demolish	Ea.		121		121	Includes material and labor to install an enameled cast iron floor mounted corner service sink.
	Install	Ea.	1600	274		1874	
	Demolish and Install	Ea.	1600	395		1995	
	Reinstall	Ea.		219.20		219.20	
	Clean	Ea.	.33	10.10		10.43	
	Minimum Charge	Job		300		300	
Pedestal	Demolish	Ea.		37.50		37.50	Includes material and labor to install a vitreous china pedestal lavatory.
	Install	Ea.	310	188		498	
	Demolish and Install	Ea.	310	225.50		535.50	
	Reinstall	Ea.		150.70		150.70	
	Clean	Ea.	.01	1.59		1.60	
	Minimum Charge	Job		300		300	
Vanity Lavatory	Demolish	Ea.		37.50		37.50	Includes material and labor to install a vitreous china lavatory.
	Install	Ea.	120	188		308	
	Demolish and Install	Ea.	120	225.50		345.50	
	Reinstall	Ea.		150.70		150.70	
	Clean	Ea.	.01	1.59		1.60	
	Minimum Charge	Job		300		300	
Rough-in	Install	Ea.	310	470		780	Includes labor and materials to install copper supply pipe with valves and drain, waste and vent pipe with all couplings, hangers and fasteners necessary.
Faucet Sink Good Grade	Demolish	Fa.		30		30	Includes material and labor to install a sink faucet and fittings.
	Install	Ea.	114	41.50		155.50	
	Demolish and Install	Ea.	114	71.50		185.50	
	Reinstall	Ea.		33.28		33.28	
	Clean	Ea.	.13	12.65		12.78	
	Minimum Charge	Job		300		300	

Finish Mechanical

Sink Only		Unit	Material	Labor	Equip.	Total	Specification
Better Grade							
	Demolish	Ea.		30		30	Includes material and labor to install a sink faucet and fittings.
	Install	Ea.	192	41.50		233.50	
	Demolish and Install	Ea.	192	71.50		263.50	
	Reinstall	Ea.		33.28		33.28	
	Clean	Ea.	.13	12.65		12.78	
	Minimum Charge	Job		300		300	
Premium Grade							
	Demolish	Ea.		30		30	Includes material and labor to install a sink faucet and fittings.
	Install	Ea.	375	52		427	
	Demolish and Install	Ea.	375	82		457	
	Reinstall	Ea.		41.50		41.50	
	Clean	Ea.	.13	12.65		12.78	
	Minimum Charge	Job		300		300	
Drain & Basket							
	Demolish	Ea.		18.85		18.85	Includes material and labor to install a sink drain and basket.
	Install	Ea.	20	37.50		57.50	
	Demolish and Install	Ea.	20	56.35		76.35	
	Reinstall	Ea.		30.14		30.14	
	Clean	Ea.	.13	12.65		12.78	
	Minimum Charge	Job		300		300	
Bathtub		Unit	Material	Labor	Equip.	Total	Specification
Enameled Steel							
	Demolish	Ea.		109		109	Includes labor and material to install a formed steel bathtub with spout, mixing valve, shower head and pop-up drain.
	Install	Ea.	910	197		1107	
	Demolish and Install	Ea.	910	306		1216	
	Reinstall	Ea.		157.86		157.86	
	Clean	Ea.	.65	33.50		34.15	
	Minimum Charge	Job		300		300	
Cast Iron							
	Demolish	Ea.		109		109	Includes material and labor to install a cast iron bathtub with spout, mixing valve, shower head and pop-up drain.
	Install	Ea.	2100	247		2347	
	Demolish and Install	Ea.	2100	356		2456	
	Reinstall	Ea.		197.32		197.32	
	Clean	Ea.	.65	33.50		34.15	
	Minimum Charge	Job		300		300	
Fiberglass							
	Demolish	Ea.		109		109	Includes material and labor to install an acrylic soaking tub with spout, mixing valve, shower head and pop-up drain.
	Install	Ea.	1825	197		2022	
	Demolish and Install	Ea.	1825	306		2131	
	Reinstall	Ea.		157.86		157.86	
	Clean	Ea.	.65	33.50		34.15	
	Minimum Charge	Job		300		300	
Institutional							
	Demolish	Ea.		109		109	Includes material and labor to install a hospital / institutional type bathtub with spout, mixing valve, shower head and pop-up drain.
	Install	Ea.	2250	360		2610	
	Demolish and Install	Ea.	2250	469		2719	
	Reinstall	Ea.		289.41		289.41	
	Clean	Ea.	.65	33.50		34.15	
	Minimum Charge	Job		300		300	

Finish Mechanical

Bathtub		Unit	Material	Labor	Equip.	Total	Specification
Whirlpool (Acrylic)							
	Demolish	Ea.		335		335	Includes material and labor to install a molded fiberglass whirlpool tub.
	Install	Ea.	1825	1075		2900	
	Demolish and Install	Ea.	1825	1410		3235	
	Reinstall	Ea.		868.22		868.22	
	Clean	Ea.	.65	33.50		34.15	
	Minimum Charge	Job		300		300	
Pump / Motor							
	Demolish	Ea.		83.50		83.50	Includes material and labor to install a whirlpool tub pump / motor.
	Install	Ea.	415	181		596	
	Demolish and Install	Ea.	415	264.50		679.50	
	Reinstall	Ea.		144.82		144.82	
	Clean	Ea.	.17	25.50		25.67	
	Minimum Charge	Job		300		300	
Heater / Motor							
	Demolish	Ea.		83.50		83.50	Includes material and labor to install a whirlpool tub heater.
	Install	Ea.	259	268		527	
	Demolish and Install	Ea.	259	351.50		610.50	
	Reinstall	Ea.		214.33		214.33	
	Clean	Ea.	.17	25.50		25.67	
	Minimum Charge	Job		300		300	
Thermal Cover							
	Demolish	Ea.		13.40		13.40	Includes material and labor to install a whirlpool tub thermal cover.
	Install	Ea.	670	37.50		707.50	
	Demolish and Install	Ea.	670	50.90		720.90	
	Reinstall	Ea.		30.14		30.14	
	Clean	Ea.	1.64	25.50		27.14	
	Minimum Charge	Job		300		300	
Tub / Shower Combination							
	Demolish	Ea.		95.50		95.50	Includes material and labor to install a fiberglass module tub with shower surround with spout, mixing valve, shower head and pop-up drain.
	Install	Ea.	1275	271		1546	
	Demolish and Install	Ea.	1275	366.50		1641.50	
	Reinstall	Ea.		217.06		217.06	
	Clean	Ea.	.81	50.50		51.31	
	Minimum Charge	Job		300		300	
Accessories							
Sliding Door							
	Demolish	Ea.		28		28	Includes material and labor to install a 48" aluminum framed tempered glass shower door.
	Install	Ea.	350	124		474	
	Demolish and Install	Ea.	350	152		502	
	Reinstall	Ea.		99.30		99.30	
	Clean	Ea.	1.36	16.85		18.21	
	Minimum Charge	Job		300		300	
Shower Head							
	Demolish	Ea.		7.55		7.55	Includes material and labor to install a water saving shower head.
	Install	Ea.	35	25		60	
	Demolish and Install	Ea.	35	32.55		67.55	
	Reinstall	Ea.		20.09		20.09	
	Clean	Ea.	.01	5.05		5.06	
	Minimum Charge	Job		300		300	
Faucet Set							
	Demolish	Ea.		37.50		37.50	Includes material and labor to install a combination spout / diverter for a bathtub.
	Install	Ea.	114	75.50		189.50	
	Demolish and Install	Ea.	114	113		227	
	Reinstall	Ea.		60.28		60.28	
	Clean	Ea.	.13	12.65		12.78	
	Minimum Charge	Job		300		300	

Finish Mechanical

Bathtub		Unit	Material	Labor	Equip.	Total	Specification
Shower Rod							
	Demolish	Ea.		4.69		4.69	Includes material and labor to install a chrome plated shower rod.
	Install	Ea.	18.10	41.50		59.60	
	Demolish and Install	Ea.	18.10	46.19		64.29	
	Reinstall	Ea.		33.08		33.08	
	Clean	Ea.		5.05		5.05	
	Minimum Charge	Job		300		300	
Rough-in							
	Install	Ea.	435	525		960	Includes labor and materials to install copper supply pipe with valves and drain, waste and vent pipe with all couplings, hangers and fasteners necessary.

Shower		Unit	Material	Labor	Equip.	Total	Specification
Fiberglass							
32" x 32"							
	Demolish	Ea.		226		226	Includes material and labor to install a fiberglass shower stall with door, mixing valve and shower head and drain fitting.
	Install	Ea.	645	197		842	
	Demolish and Install	Ea.	645	423		1068	
	Reinstall	Ea.		157.86		157.86	
	Clean	Ea.	.81	50.50		51.31	
	Minimum Charge	Job		300		300	
36" x 36"							
	Demolish	Ea.		226		226	Includes material and labor to install a fiberglass shower stall with door, mixing valve and shower head and drain fitting.
	Install	Ea.	705	197		902	
	Demolish and Install	Ea.	705	423		1128	
	Reinstall	Ea.		157.86		157.86	
	Clean	Ea.	.81	50.50		51.31	
	Minimum Charge	Job		300		300	
35" x 60"							
	Demolish	Ea.		226		226	Includes material and labor to install a handicap fiberglass shower stall with door & seat, mixing valve and shower head and drain fitting.
	Install	Ea.	1075	271		1346	
	Demolish and Install	Ea.	1075	497		1572	
	Reinstall	Ea.		217.06		217.06	
	Clean	Ea.	.81	50.50		51.31	
	Minimum Charge	Job		300		300	
Accessories							
Single Door							
	Demolish	Ea.		28		28	Includes material and labor to install a shower door.
	Install	Ea.	197	65.50		262.50	
	Demolish and Install	Ea.	197	93.50		290.50	
	Reinstall	Ea.		52.41		52.41	
	Clean	Ea.	1.36	16.85		18.21	
	Minimum Charge	Job		300		300	
Shower Head							
	Demolish	Ea.		7.55		7.55	Includes material and labor to install a water saving shower head.
	Install	Ea.	35	25		60	
	Demolish and Install	Ea.	35	32.55		67.55	
	Reinstall	Ea.		20.09		20.09	
	Clean	Ea.	.01	5.05		5.06	
	Minimum Charge	Job		300		300	

Finish Mechanical

Shower		Unit	Material	Labor	Equip.	Total	Specification
Faucet Set							
	Demolish	Ea.		37.50		37.50	Includes material and labor to install a combination spout / diverter for a bathtub.
	Install	Ea.	114	75.50		189.50	
	Demolish and Install	Ea.	114	113		227	
	Reinstall	Ea.		60.28		60.28	
	Clean	Ea.	.13	12.65		12.78	
	Minimum Charge	Job		300		300	
Shower Pan							
	Demolish	Ea.		33.50		33.50	Includes material and labor to install the base portion of a fiberglass shower unit.
	Install	Ea.	172	75.50		247.50	
	Demolish and Install	Ea.	172	109		281	
	Reinstall	Ea.		60.28		60.28	
	Clean	Ea.	.65	33.50		34.15	
	Minimum Charge	Job		300		300	
Rough-in							
	Install	Ea.	455	530		985	Includes labor and materials to install copper supply pipe with valves and drain, waste and vent pipe with all couplings, hangers and fasteners necessary.



Ductwork		Unit	Material	Labor	Equip.	Total	Specification
Return Grill							
Under 10" Wide							
	Demolish	Ea.		13.10		13.10	Includes material and labor to install a 10" x 10" air return register.
	Install	Ea.	42	33		75	
	Demolish and Install	Ea.	42	46.10		88.10	
	Reinstall	Ea.		26.20		26.20	
	Clean	Ea.	.17	11.25		11.42	
	Minimum Charge	Job		295		295	
12" to 20" Wide							
	Demolish	Ea.		13.10		13.10	Includes material and labor to install a 16" x 16" air return register.
	Install	Ea.	108	34.50		142.50	
	Demolish and Install	Ea.	108	47.60		155.60	
	Reinstall	Ea.		27.75		27.75	
	Clean	Ea.	.17	11.25		11.42	
	Minimum Charge	Job		295		295	
Over 20" Wide							
	Demolish	Ea.		19.85		19.85	Includes material and labor to install a 24" x 24" air return register.
	Install	Ea.	89	53.50		142.50	
	Demolish and Install	Ea.	89	73.35		162.35	
	Reinstall	Ea.		42.88		42.88	
	Clean	Ea.	.17	12.65		12.82	
	Minimum Charge	Job		295		295	
Supply Grill							
Baseboard Type							
	Demolish	Ea.		9.35		9.35	Includes material and labor to install a 14" x 6" baseboard air supply register.
	Install	Ea.	29	29.50		58.50	
	Demolish and Install	Ea.	29	38.85		67.85	
	Reinstall	Ea.		23.58		23.58	
	Clean	Ea.	.17	11.25		11.42	
	Minimum Charge	Job		295		295	

Finish Mechanical

Ductwork		Unit	Material	Labor	Equip.	Total	Specification
10" Wide							
	Demolish	Ea.		10.90		10.90	Includes material and labor to install a 10" x 6" air supply register.
	Install	Ea.	44	29.50		73.50	
	Demolish and Install	Ea.	44	40.40		84.40	
	Reinstall	Ea.		23.58		23.58	
	Clean	Ea.	.17	11.25		11.42	
	Minimum Charge	Job		295		295	
12" to 15" Wide							
	Demolish	Ea.		10.90		10.90	Includes material and labor to install a 14" x 8" air supply register.
	Install	Ea.	43	34.50		77.50	
	Demolish and Install	Ea.	43	45.40		88.40	
	Reinstall	Ea.		27.75		27.75	
	Clean	Ea.	.17	11.25		11.42	
	Minimum Charge	Job		295		295	
18" to 24" Wide							
	Demolish	Ea.		13.10		13.10	Includes material and labor to install a 24" x 8" air supply register.
	Install	Ea.	84.50	45.50		130	
	Demolish and Install	Ea.	84.50	58.60		143.10	
	Reinstall	Ea.		36.28		36.28	
	Clean	Ea.	.17	12.65		12.82	
	Minimum Charge	Job		295		295	
30" to 36" Wide							
	Demolish	Ea.		16.40		16.40	Includes material and labor to install a 30" x 8" air supply register.
	Install	Ea.	111	42		153	
	Demolish and Install	Ea.	111	58.40		169.40	
	Reinstall	Ea.		33.69		33.69	
	Clean	Ea.	.17	25.50		25.67	
	Minimum Charge	Job		295		295	
Diffuser							
12" x 12"							
	Demolish	Ea.		13.10		13.10	Includes material and labor to install a 12" x 12" aluminum diffuser.
	Install	Ea.	147	49		196	
	Demolish and Install	Ea.	147	62.10		209.10	
	Reinstall	Ea.		39.31		39.31	
	Clean	Ea.	.17	11.25		11.42	
	Minimum Charge	Job		295		295	
14" x 14"							
	Demolish	Ea.		13.10		13.10	Includes material and labor to install a 14" x 14" aluminum diffuser.
	Install	Ea.	233	49		282	
	Demolish and Install	Ea.	233	62.10		295.10	
	Reinstall	Ea.		39.31		39.31	
	Clean	Ea.	.17	12.65		12.82	
	Minimum Charge	Job		295		295	
18" x 18"							
	Demolish	Ea.		19.85		19.85	Includes material and labor to install a 18" x 18" aluminum diffuser.
	Install	Ea.	227	65.50		292.50	
	Demolish and Install	Ea.	227	85.35		312.35	
	Reinstall	Ea.		52.41		52.41	
	Clean	Ea.	.17	16.85		17.02	
	Minimum Charge	Job		295		295	
12" Round							
	Demolish	Ea.		18.20		18.20	Includes material and labor to install a 12" diameter aluminum diffuser with a butterfly damper.
	Install	Ea.	56.50	49		105.50	
	Demolish and Install	Ea.	56.50	67.20		123.70	
	Reinstall	Ea.		39.31		39.31	
	Clean	Ea.	.17	11.25		11.42	
	Minimum Charge	Job		295		295	

Finish Mechanical

Ductwork		Unit	Material	Labor	Equip.	Total	Specification
14" to 20" Round							
	Demolish	Ea.		24.50		24.50	Includes material and labor to install a 20" diameter aluminum diffuser with a butterfly damper.
	Install	Ea.	256	65.50		321.50	
	Demolish and Install	Ea.	256	90		346	
	Reinstall	Ea.		52.41		52.41	
	Clean	Ea.	.17	12.65		12.82	
	Minimum Charge	Job		295		295	
Flush-out / Sanitize							
	Install	L.F.	.65	5.05		5.70	Includes labor and material costs to clean ductwork or flue.
	Minimum Charge	Job		295		295	

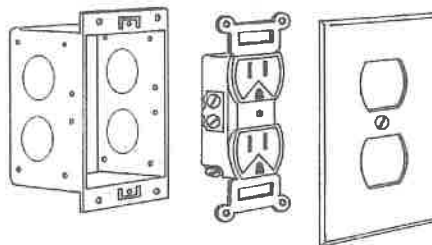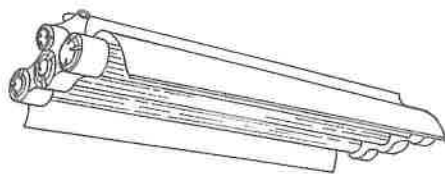

Lighting Fixture

Duplex Receptacle

Electrical Per S.F.	Unit	Material	Labor	Equip.	Total	Specification
Residential						
Light Fixtures						
Install	S.F.	.28	.32		.60	Includes labor and material to replace house light fixtures. Apply S.F. cost to floor area including garages but not basements.

Circuits	Unit	Material	Labor	Equip.	Total	Specification
120V						
Outlet with Wiring						
Demolish	Ea.		36		36	Includes material and labor to install general purpose outlet with cover, up to 20 feet of #12/2 wire.
Install	Ea.	12	44.50		56.50	
Demolish and Install	Ea.	12	80.50		92.50	
Reinstall	Ea.		35.47		35.47	
Clean	Ea.		2.53		2.53	
Minimum Charge	Job		325		325	
GFCI Outlet w / Wiring						
Demolish	Ea.		36		36	Cost includes material and labor to install 120V GFCI receptacle and wall plate, with up to 20 feet of #12/2 wire.
Install	Ea.	33.50	52.50		86	
Demolish and Install	Ea.	33.50	88.50		122	
Reinstall	Ea.		41.93		41.93	
Clean	Ea.		2.53		2.53	
Minimum Charge	Job		325		325	
Exterior Outlet w / Wiring						
Demolish	Ea.		36		36	Cost includes material and labor to install 110V waterproof external receptacle and cover plate with up to 20' of #12/2 wire.
Install	Ea.	44	54		98	
Demolish and Install	Ea.	44	90		134	
Reinstall	Ea.		43.01		43.01	
Clean	Ea.		2.53		2.53	
Minimum Charge	Job		325		325	
240V Outlet w / Wiring						
Demolish	Ea.		36		36	Cost includes material and labor to install 240V receptacle and cover plate with up to 20' of #12/2 wire.
Install	Ea.	87	101		188	
Demolish and Install	Ea.	87	137		224	
Reinstall	Ea.		80.52		80.52	
Clean	Ea.		2.53		2.53	
Minimum Charge	Job		325		325	

Finish Electrical

Circuits		Unit	Material	Labor	Equip.	Total	Specification
TV / Cable Jack w / Wiring							
	Demolish	Ea.		36		36	Includes material and labor to install TV/cable outlet box and cover plate including 20' of wiring.
	Install	Ea.	20.50	40.50		61	
	Demolish and Install	Ea.	20.50	76.50		97	
	Reinstall	Ea.		32.26		32.26	
	Clean	Ea.		2.53		2.53	
	Minimum Charge	Job		325		325	
Phone Jack with Wiring							
	Demolish	Ea.		36		36	Includes material and labor to install phone jack and cover plate including up to 20' of telephone cable.
	Install	Ea.	12.25	25		37.25	
	Demolish and Install	Ea.	12.25	61		73.25	
	Reinstall	Ea.		19.85		19.85	
	Clean	Ea.		1.58		1.58	
	Minimum Charge	Job		325		325	

Light Switch		Unit	Material	Labor	Equip.	Total	Specification
Single Switch							
	Demolish	Ea.		7.15		7.15	Includes material and labor to install single switch and wall plate. Wiring is not included.
	Install	Ea.	4.09	30.50		34.59	
	Demolish and Install	Ea.	4.09	37.65		41.74	
	Reinstall	Ea.		24.58		24.58	
	Clean	Ea.		2.53		2.53	
	Minimum Charge	Job		325		325	
Plate							
	Demolish	Ea.		3.58		3.58	Includes material and labor to install a one gang brown wall switch plate.
	Install	Ea.	.44	8.05		8.49	
	Demolish and Install	Ea.	.44	11.63		12.07	
	Reinstall	Ea.		6.45		6.45	
	Clean	Ea.	.07	.51		.58	
	Minimum Charge	Job		325		325	
Double Switch							
	Demolish	Ea.		14.35		14.35	Includes material and labor to install double switch and wall plate. Wiring is not included.
	Install	Ea.	5.85	46		51.85	
	Demolish and Install	Ea.	5.85	60.35		66.20	
	Reinstall	Ea.		36.87		36.87	
	Clean	Ea.	.07	8.10		8.17	
	Minimum Charge	Job		325		325	
Plate							
	Demolish	Ea.		3.58		3.58	Includes material and labor to install a two gang brown wall switch plate.
	Install	Ea.	.89	12.15		13.04	
	Demolish and Install	Ea.	.89	15.73		16.62	
	Reinstall	Ea.		9.74		9.74	
	Clean	Ea.	.07	.51		.58	
	Minimum Charge	Job		325		325	
Triple Switch							
	Demolish	Ea.		21.50		21.50	Includes material and labor to install triple switch and wall plate. Wiring is not included.
	Install	Ea.	17.10	54		71.10	
	Demolish and Install	Ea.	17.10	75.50		92.60	
	Reinstall	Ea.		43.01		43.01	
	Clean	Ea.	.07	12.15		12.22	
	Minimum Charge	Job		325		325	

Finish Electrical

Light Switch		Unit	Material	Labor	Equip.	Total	Specification
Plate	Demolish	Ea.		3.58		3.58	Includes material and labor to install a three gang brown wall switch plate.
	Install	Ea.	1.38	20		21.38	
	Demolish and Install	Ea.	1.38	23.58		24.96	
	Reinstall	Ea.		16.13		16.13	
	Clean	Ea.	.07	.51		.58	
	Minimum Charge	Job		325		325	
Dimmer Switch							
Plate	Demolish	Ea.		7.15		7.15	Includes material and labor to install dimmer switch. Wiring is not included.
	Install	Ea.	40	38		78	
	Demolish and Install	Ea.	40	45.15		85.15	
	Reinstall	Ea.		30.36		30.36	
	Clean	Ea.		2.53		2.53	
	Minimum Charge	Job		325		325	
Plate	Demolish	Ea.		3.58		3.58	Includes material and labor to install a one gang brown wall switch plate.
	Install	Ea.	.44	8.05		8.49	
	Demolish and Install	Ea.	.44	11.63		12.07	
	Reinstall	Ea.		6.45		6.45	
	Clean	Ea.	.07	.51		.58	
	Minimum Charge	Job		325		325	
With Wiring							
Single	Demolish	Ea.		36		36	Includes material and labor to install single switch and plate including up to 20' of romex cable.
	Install	Ea.	11.15	37.50		48.65	
	Demolish and Install	Ea.	11.15	73.50		84.65	
	Reinstall	Ea.		30.18		30.18	
	Clean	Ea.		2.53		2.53	
	Minimum Charge	Job		325		325	
Double	Demolish	Ea.		36		36	Includes material and labor to install double switch and plate including up to 20' of romex cable.
	Install	Ea.	31	64.50		95.50	
	Demolish and Install	Ea.	31	100.50		131.50	
	Reinstall	Ea.		51.62		51.62	
	Clean	Ea.	.07	8.10		8.17	
	Minimum Charge	Job		325		325	
Triple	Demolish	Ea.		54		54	Includes material and labor to install triple switch and plate including up to 20' of romex cable.
	Install	Ea.	25.50	72.50		98	
	Demolish and Install	Ea.	25.50	126.50		152	
	Reinstall	Ea.		58.06		58.06	
	Clean	Ea.	.07	12.15		12.22	
	Minimum Charge	Job		325		325	
Dimmer							
Plate	Demolish	Ea.		36		36	Includes material and labor to install dimmer switch and cover plate including up to 20' of romex cable.
	Install	Ea.	47.50	44.50		92	
	Demolish and Install	Ea.	47.50	80.50		128	
	Reinstall	Ea.		35.47		35.47	
	Clean	Ea.		2.53		2.53	
	Minimum Charge	Job		325		325	

Finish Electrical

Cover for Outlet / Switch		Unit	Material	Labor	Equip.	Total	Specification
High Grade							
	Demolish	Ea.		3.58		3.58	Includes material and labor to install wall plate, stainless steel, 1 gang.
	Install	Ea.	2.30	8.05		10.35	
	Demolish and Install	Ea.	2.30	11.63		13.93	
	Reinstall	Ea.		6.45		6.45	
	Clean	Ea.	.07	.51		.58	
	Minimum Charge	Job		325		325	
Deluxe Grade							
	Demolish	Ea.		3.58		3.58	Includes material and labor to install wall plate, brushed brass, 1 gang.
	Install	Ea.	8.15	8.05		16.20	
	Demolish and Install	Ea.	8.15	11.63		19.78	
	Reinstall	Ea.		6.45		6.45	
	Clean	Ea.	.07	.51		.58	
	Minimum Charge	Job		325		325	
Residential Light Fixture		Unit	Material	Labor	Equip.	Total	Specification
Ceiling							
Good Quality							
	Demolish	Ea.		14.95		14.95	Includes material and labor to install standard quality incandescent ceiling light fixture. Wiring is not included.
	Install	Ea.	28.50	16.15		44.65	
	Demolish and Install	Ea.	28.50	31.10		59.60	
	Reinstall	Ea.		12.90		12.90	
	Clean	Ea.	.08	33.50		33.58	
	Minimum Charge	Job		325		325	
Better Quality							
	Demolish	Ea.		14.95		14.95	Includes material and labor to install custom quality incandescent ceiling light fixture. Wiring is not included.
	Install	Ea.	100	34		134	
	Demolish and Install	Ea.	100	48.95		148.95	
	Reinstall	Ea.		27.17		27.17	
	Clean	Ea.	.08	33.50		33.58	
	Minimum Charge	Job		325		325	
Premium Quality							
	Demolish	Ea.		14.95		14.95	Includes material and labor to install deluxe quality incandescent ceiling light fixture. Wiring is not included.
	Install	Ea.	450	34		484	
	Demolish and Install	Ea.	450	48.95		498.95	
	Reinstall	Ea.		27.17		27.17	
	Clean	Ea.	.08	33.50		33.58	
	Minimum Charge	Job		325		325	
Recessed Ceiling							
	Demolish	Ea.		30		30	Includes material and labor to install standard quality recessed eyeball spotlight with housing. Wiring is not included.
	Install	Ea.	64.50	21.50		86	
	Demolish and Install	Ea.	64.50	51.50		116	
	Reinstall	Ea.		17.21		17.21	
	Clean	Ea.	.03	4.22		4.25	
	Minimum Charge	Job		325		325	
Recessed Eyeball							
	Demolish	Ea.		30		30	Includes material and labor to install custom quality recessed eyeball spotlight with housing. Wiring is not included.
	Install	Ea.	47.50	23		70.50	
	Demolish and Install	Ea.	47.50	53		100.50	
	Reinstall	Ea.		18.43		18.43	
	Clean	Ea.	.03	4.22		4.25	
	Minimum Charge	Job		325		325	

Finish Electrical

Residential Light Fixture		Unit	Material	Labor	Equip.	Total	Specification
Recessed Shower Type							
	Demolish	Ea.		30		30	Includes material and labor to install deluxe quality recessed eyeball spotlight with housing. Wiring is not included.
	Install	Ea.	99.50	21.50		121	
	Demolish and Install	Ea.	99.50	51.50		151	
	Reinstall	Ea.		17.21		17.21	
	Clean	Ea.	.03	4.22		4.25	
	Minimum Charge	Job		325		325	
Run Wiring							
	Install	Ea.	22	26		48	Includes labor and material to install an electric fixture utility box with non-metallic cable.
	Minimum Charge	Job		325		325	
Fluorescent							
Good Quality							
	Demolish	Ea.		32.50		32.50	Includes material and labor to install standard quality 12" wide by 48" long decorative surface mounted fluorescent fixture w/acrylic diffuser.
	Install	Ea.	123	92		215	
	Demolish and Install	Ea.	123	124.50		247.50	
	Reinstall	Ea.		73.74		73.74	
	Clean	Ea.	.03	4.22		4.25	
	Minimum Charge	Job		325		325	
Better Quality							
	Demolish	Ea.		32.50		32.50	Includes material and labor to install an interior fluorescent lighting fixture.
	Install	Ea.	234	104		338	
	Demolish and Install	Ea.	234	136.50		370.50	
	Reinstall	Ea.		83.25		83.25	
	Clean	Ea.	.03	4.22		4.25	
	Minimum Charge	Job		325		325	
Premium Quality							
	Demolish	Ea.		32.50		32.50	Includes material and labor to install deluxe quality 24" wide by 48" long decorative surface mounted fluorescent fixture w/acrylic diffuser.
	Install	Ea.	175	122		297	
	Demolish and Install	Ea.	175	154.50		329.50	
	Reinstall	Ea.		97.39		97.39	
	Clean	Ea.	.03	4.22		4.25	
	Minimum Charge	Job		325		325	
Run Wiring							
	Install	Ea.	22	26		48	Includes labor and material to install an electric fixture utility box with non-metallic cable.
	Minimum Charge	Job		325		325	
Exterior							
Good Quality							
	Demolish	Ea.		28.50		28.50	Includes material and labor to install standard quality incandescent outdoor light fixture. Wiring is not included.
	Install	Ea.	80.50	40.50		121	
	Demolish and Install	Ea.	80.50	69		149.50	
	Reinstall	Ea.		32.26		32.26	
	Clean	Ea.	.17	16.85		17.02	
	Minimum Charge	Job		325		325	
Better Quality							
	Demolish	Ea.		28.50		28.50	Includes material and labor to install custom quality incandescent outdoor light fixture. Wiring is not included.
	Install	Ea.	131	40.50		171.50	
	Demolish and Install	Ea.	131	69		200	
	Reinstall	Ea.		32.26		32.26	
	Clean	Ea.	.17	16.85		17.02	
	Minimum Charge	Job		325		325	
Premium Quality							
	Demolish	Ea.		28.50		28.50	Includes material and labor to install deluxe quality incandescent outdoor light fixture. Wiring is not included.
	Install	Ea.	370	161		531	
	Demolish and Install	Ea.	370	189.50		559.50	
	Reinstall	Ea.		129.04		129.04	
	Clean	Ea.	.17	16.85		17.02	
	Minimum Charge	Job		325		325	

Finish Electrical

Residential Light Fixture		Unit	Material	Labor	Equip.	Total	Specification
Outdoor w / Pole							
	Demolish	Ea.		28.50		28.50	Includes material and labor to install post lantern type incandescent outdoor light fixture. Wiring is not included.
	Install	Ea.	415	161		576	
	Demolish and Install	Ea.	415	189.50		604.50	
	Reinstall	Ea.		129.04		129.04	
	Clean	Ea.	.17	16.85		17.02	
	Minimum Charge	Job		325		325	
Run Wiring							
	Install	Ea.	22	26		48	Includes labor and material to install an electric fixture utility box with non-metallic cable.
	Minimum Charge	Job		325		325	
Track Lighting							
	Demolish	L.F.		9.95		9.95	Includes material and labor to install track lighting.
	Install	L.F.	36.50	27		63.50	
	Demolish and Install	L.F.	36.50	36.95		73.45	
	Reinstall	L.F.		21.51		21.51	
	Clean	L.F.	.17	8.10		8.27	
	Minimum Charge	Job		325		325	

Commercial Light Fixture		Unit	Material	Labor	Equip.	Total	Specification
Fluorescent							
2 Bulb, 2'							
	Demolish	Ea.		28.50		28.50	Includes material and labor to install a 2' long surface mounted fluorescent light fixture with two 40 watt bulbs.
	Install	Ea.	40	80.50		120.50	
	Demolish and Install	Ea.	40	109		149	
	Reinstall	Ea.		64.52		64.52	
	Clean	Ea.	.81	29		29.81	
	Minimum Charge	Job		325		325	
2 Bulb, 4'							
	Demolish	Ea.		28.50		28.50	Includes material and labor to install a 4' long surface mounted fluorescent light fixture with two 40 watt bulbs.
	Install	Ea.	162	92		254	
	Demolish and Install	Ea.	162	120.50		282.50	
	Reinstall	Ea.		73.74		73.74	
	Clean	Ea.	.81	29		29.81	
	Minimum Charge	Job		325		325	
3 Bulb, 4'							
	Demolish	Ea.		28.50		28.50	Includes material and labor to install a 4' long pendant mounted fluorescent light fixture with three 34 watt bulbs.
	Install	Ea.	116	92		208	
	Demolish and Install	Ea.	116	120.50		236.50	
	Reinstall	Ea.		73.74		73.74	
	Clean	Ea.	.81	29		29.81	
	Minimum Charge	Job		325		325	
4 Bulb, 4'							
	Demolish	Ea.		28.50		28.50	Includes material and labor to install a 4' long pendant mounted fluorescent light fixture with four 34 watt bulbs.
	Install	Ea.	104	99.50		203.50	
	Demolish and Install	Ea.	104	128		232	
	Reinstall	Ea.		79.41		79.41	
	Clean	Ea.	.81	29		29.81	
	Minimum Charge	Job		325		325	
2 Bulb, 8'							
	Demolish	Ea.		36		36	Includes material and labor to install an 8' long surface mounted fluorescent light fixture with two 110 watt bulbs.
	Install	Ea.	130	122		252	
	Demolish and Install	Ea.	130	158		288	
	Reinstall	Ea.		97.39		97.39	
	Clean	Ea.	.81	29		29.81	
	Minimum Charge	Job		325		325	

Finish Electrical

Commercial Light Fixture		Unit	Material	Labor	Equip.	Total	Specification
Run Wiring	Install	Ea.	22	26		48	Includes labor and material to install an electric fixture utility box with non-metallic cable.
	Minimum Charge	Job		325		325	
Ceiling, Recessed Eyeball Type	Demolish	Ea.		30		30	Includes material and labor to install custom quality recessed eyeball spotlight with housing. Wiring is not included.
	Install	Ea.	47.50	23		70.50	
	Demolish and Install	Ea.	47.50	53		100.50	
	Reinstall	Ea.		18.43		18.43	
	Clean	Ea.	.03	4.22		4.25	
	Minimum Charge	Job		325		325	
Shower Type	Demolish	Ea.		30		30	Includes material and labor to install deluxe quality recessed eyeball spotlight with housing. Wiring is not included.
	Install	Ea.	99.50	21.50		121	
	Demolish and Install	Ea.	99.50	51.50		151	
	Reinstall	Ea.		17.21		17.21	
	Clean	Ea.	.03	4.22		4.25	
	Minimum Charge	Job		325		325	
Run Wiring	Install	Ea.	22	26		48	Includes labor and material to install an electric fixture utility box with non-metallic cable.
	Minimum Charge	Job		325		325	
Ceiling Grid Type 2 Tube	Demolish	Ea.		42		42	Cost includes material and labor to install 2 lamp fluorescent light fixture in 2' x 4' ceiling grid system including lens and tubes.
	Install	Ea.	106	122		228	
	Demolish and Install	Ea.	106	164		270	
	Reinstall	Ea.		97.39		97.39	
	Clean	Ea.	.81	29		29.81	
	Minimum Charge	Job		325		325	
4 Tube	Demolish	Ea.		48		48	Cost includes material and labor to install 4 lamp fluorescent light fixture in 2' x 4' ceiling grid system including lens and tubes.
	Install	Ea.	107	137		244	
	Demolish and Install	Ea.	107	185		292	
	Reinstall	Ea.		109.82		109.82	
	Clean	Ea.	.81	29		29.81	
	Minimum Charge	Job		325		325	
Acrylic Diffuser	Demolish	Ea.		7.45		7.45	Includes material and labor to install fluorescent light fixture w/acrylic diffuser.
	Install	Ea.	28	19.55		47.55	
	Demolish and Install	Ea.	28	27		55	
	Reinstall	Ea.		15.64		15.64	
	Clean	Ea.	.53	5.05		5.58	
	Minimum Charge	Job		325		325	
Louver Diffuser	Demolish	Ea.		8.95		8.95	Includes material and labor to install fluorescent light fixture w/louver diffuser.
	Install	Ea.	112	19.55		131.55	
	Demolish and Install	Ea.	112	28.50		140.50	
	Reinstall	Ea.		15.64		15.64	
	Clean	Ea.	.53	5.05		5.58	
	Minimum Charge	Job		325		325	
Run Wiring	Install	Ea.	22	26		48	Includes labor and material to install an electric fixture utility box with non-metallic cable.
	Minimum Charge	Job		325		325	

Finish Electrical

Commercial Light Fixture		Unit	Material	Labor	Equip.	Total	Specification
Track Lighting							
	Demolish	L.F.		9.95		9.95	Includes material and labor to install track lighting.
	Install	L.F.	36.50	27		63.50	
	Demolish and Install	L.F.	36.50	36.95		73.45	
	Reinstall	L.F.		21.51		21.51	
	Clean	L.F.	.17	8.10		8.27	
	Minimum Charge	Job		325		325	
Emergency							
	Demolish	Ea.		51		51	Includes material and labor to install battery-powered emergency lighting unit with two (2) lights, including wiring.
	Install	Ea.	168	161		329	
	Demolish and Install	Ea.	168	212		380	
	Reinstall	Ea.		129.04		129.04	
	Clean	Ea.	.41	29		29.41	
	Minimum Charge	Job		325		325	
Run Wiring							
	Install	Ea.	22	26		48	Includes labor and material to install an electric fixture utility box with non-metallic cable.
	Minimum Charge	Job		325		325	

Fan		Unit	Material	Labor	Equip.	Total	Specification
Ceiling Paddle							
Good Quality							
	Demolish	Ea.		40		40	Includes material and labor to install standard ceiling fan.
	Install	Ea.	139	64.50		203.50	
	Demolish and Install	Ea.	139	104.50		243.50	
	Reinstall	Ea.		51.62		51.62	
	Clean	Ea.	.33	25.50		25.83	
	Minimum Charge	Job		325		325	
Better Quality							
	Demolish	Ea.		40		40	Includes material and labor to install better ceiling fan.
	Install	Ea.	325	64.50		389.50	
	Demolish and Install	Ea.	325	104.50		429.50	
	Reinstall	Ea.		51.62		51.62	
	Clean	Ea.	.33	25.50		25.83	
	Minimum Charge	Job		325		325	
Premium Quality							
	Demolish	Ea.		40		40	Includes material and labor to install deluxe ceiling fan.
	Install	Ea.	289	80.50		369.50	
	Demolish and Install	Ea.	289	120.50		409.50	
	Reinstall	Ea.		64.52		64.52	
	Clean	Ea.	.33	25.50		25.83	
	Minimum Charge	Job		325		325	
Light Kit							
	Install	Ea.	55	80.50		135.50	Includes labor and material to install a ceiling fan light kit.
	Minimum Charge	Job		325		325	
Bathroom Exhaust							
Ceiling Mounted							
	Demolish	Ea.		30		30	Cost includes material and labor to install 60 CFM ceiling mounted bathroom exhaust fan, up to 10' of wiring with one wall switch.
	Install	Ea.	56.50	64.50		121	
	Demolish and Install	Ea.	56.50	94.50		151	
	Reinstall	Ea.		51.46		51.46	
	Clean	Ea.	.17	10.10		10.27	
	Minimum Charge	Job		325		325	

Finish Electrical

Fan		Unit	Material	Labor	Equip.	Total	Specification
Wall Mounted							
	Demolish	Ea.		30		30	Cost includes material and labor to install 110 CFM wall mounted bathroom exhaust fan, up to 10' of wiring with one wall switch.
	Install	Ea.	75.50	64.50		140	
	Demolish and Install	Ea.	75.50	94.50		170	
	Reinstall	Ea.		51.46		51.46	
	Clean	Ea.	.17	10.10		10.27	
	Minimum Charge	Job		325		325	
Lighted							
	Demolish	Ea.		30		30	Cost includes material and labor to install 50 CFM ceiling mounted lighted exhaust fan, up to 10' of wiring with one wall switch..
	Install	Ea.	95.50	64.50		160	
	Demolish and Install	Ea.	95.50	94.50		190	
	Reinstall	Ea.		51.46		51.46	
	Clean	Ea.	.17	10.10		10.27	
	Minimum Charge	Job		325		325	
Blower Heater w / Light							
	Demolish	Ea.		30		30	Includes material and labor to install ceiling blower type ventilator with switch, light and snap-on grill. Includes 1300 watt/120 volt heater.
	Install	Ea.	100	107		207	
	Demolish and Install	Ea.	100	137		237	
	Reinstall	Ea.		85.77		85.77	
	Clean	Ea.	.17	10.10		10.27	
	Minimum Charge	Job		325		325	
Fan Heater w / Light							
	Demolish	Ea.		30		30	Includes material and labor to install circular ceiling fan heater unit, 1500 watt, surface mounted.
	Install	Ea.	134	107		241	
	Demolish and Install	Ea.	134	137		271	
	Reinstall	Ea.		85.77		85.77	
	Clean	Ea.	.17	10.10		10.27	
	Minimum Charge	Job		325		325	
Whole House Exhaust 36" Ceiling Mounted							
	Install	Ea.	1575	161		1736	Includes material and labor to install a whole house exhaust fan.
	Clean	Ea.	.04	8.20		8.24	
	Minimum Charge	Job		325		325	
Kitchen Exhaust Standard Model							
	Install	Ea.	88	43		131	Includes labor and materials to install a bathroom or kitchen vent fan.
	Clean	Ea.	.04	8.20		8.24	
	Minimum Charge	Job		325		325	
Low Noise Model							
	Install	Ea.	141	43		184	Includes labor and materials to install a bathroom or kitchen vent fan, low noise model.
	Clean	Ea.	.04	8.20		8.24	
	Minimum Charge	Job		325		325	

Low Voltage Systems		Unit	Material	Labor	Equip.	Total	Specification
Smoke Detector Pre-wired							
	Demolish	Ea.		14.95		14.95	Includes material and labor to install AC type smoke detector including wiring.
	Install	Ea.	28	30.50		58.50	
	Demolish and Install	Ea.	28	45.45		73.45	
	Reinstall	Ea.		24.20		24.20	
	Clean	Ea.	.07	12.65		12.72	
	Minimum Charge	Job		325		325	




Finish Electrical

Low Voltage Systems		Unit	Material	Labor	Equip.	Total	Specification
Run Wiring							
	Install	Ea.	22	26		48	Includes labor and material to install an electric fixture utility box with non-metallic cable.
	Minimum Charge	Job		325		325	
Door Bell / Chimes							
Good Quality							
	Demolish	Ea.		45		45	Includes material and labor to install surface mounted 2 note door bell. Wiring is not included.
	Install	Ea.	69	161		230	
	Demolish and Install	Ea.	69	206		275	
	Reinstall	Ea.		129.04		129.04	
	Clean	Ea.	.17	12.65		12.82	
	Minimum Charge	Job		325		325	
Better Quality							
	Demolish	Ea.		45		45	Includes material and labor to install standard quality surface mounted 2 note door bell. Wiring is not included.
	Install	Ea.	122	161		283	
	Demolish and Install	Ea.	122	206		328	
	Reinstall	Ea.		129.04		129.04	
	Clean	Ea.	.17	12.65		12.82	
	Minimum Charge	Job		325		325	
Premium Quality							
	Demolish	Ea.		45		45	Includes material and labor to install deluxe quality surface mounted 2 note door bell. Wiring is not included.
	Install	Ea.	125	161		286	
	Demolish and Install	Ea.	125	206		331	
	Reinstall	Ea.		129.04		129.04	
	Clean	Ea.	.17	12.65		12.82	
	Minimum Charge	Job		325		325	
Run Wiring							
	Install	Ea.	22	26		48	Includes labor and material to install an electric fixture utility box with non-metallic cable.
	Minimum Charge	Job		325		325	
Intercom System							
Intercom (master)							
	Demolish	Ea.		119		119	Includes material and labor to install master intercom station with AM/FM music and room monitoring. Wiring is not included.
	Install	Ea.	950	325		1275	
	Demolish and Install	Ea.	950	444		1394	
	Reinstall	Ea.		258.08		258.08	
	Clean	Ea.	.17	33.50		33.67	
	Minimum Charge	Job		325		325	
Intercom (remote)							
	Demolish	Ea.		71.50		71.50	Includes material and labor to install remote station for master intercom system. Wiring is not included.
	Install	Ea.	86.50	80.50		167	
	Demolish and Install	Ea.	86.50	152		238.50	
	Reinstall	Ea.		64.52		64.52	
	Clean	Ea.	.17	12.65		12.82	
	Minimum Charge	Job		325		325	
Security System							
Alarm Panel							
	Demolish	Ea.		143		143	Includes material and labor to install a 6 zone burglar alarm panel.
	Install	Ea.	93.50	325		418.50	
	Demolish and Install	Ea.	93.50	468		561.50	
	Reinstall	Ea.		258.08		258.08	
	Clean	Ea.	.17	12.65		12.82	
	Minimum Charge	Job		325		325	

Finish Electrical

Low Voltage Systems		Unit	Material	Labor	Equip.	Total	Specification
Motion Detector							
	Demolish	Ea.		102		102	Includes material and labor to install an ultrasonic motion detector for a security system.
	Install	Ea.	196	281		477	
	Demolish and Install	Ea.	196	383		579	
	Reinstall	Ea.		224.42		224.42	
	Clean	Ea.	.17	12.65		12.82	
	Minimum Charge	Job		325		325	
Door Switch							
	Demolish	Ea.		45		45	Includes material and labor to install a door / window contact for a security system.
	Install	Ea.	69	122		191	
	Demolish and Install	Ea.	69	167		236	
	Reinstall	Ea.		97.39		97.39	
	Clean	Ea.	.17	4.05		4.22	
	Minimum Charge	Job		325		325	
Window Switch							
	Demolish	Ea.		45		45	Includes material and labor to install a door / window contact for a security system.
	Install	Ea.	69	122		191	
	Demolish and Install	Ea.	69	167		236	
	Reinstall	Ea.		97.39		97.39	
	Clean	Ea.	.17	4.05		4.22	
	Minimum Charge	Job		325		325	
Satellite System Dish							
	Demolish	Ea.		199		199	Includes material, labor and equipment to install 10' mesh dish.
	Install	Ea.	1800	540		2340	
	Demolish and Install	Ea.	1800	739		2539	
	Reinstall	Ea.		430.13		430.13	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		325		325	
Motor							
	Demolish	Ea.		99.50		99.50	Includes material and labor to install a television satellite dish motor unit.
	Install	Ea.	261	269		530	
	Demolish and Install	Ea.	261	368.50		629.50	
	Reinstall	Ea.		215.07		215.07	
	Clean	Ea.	.17	12.65		12.82	
	Minimum Charge	Job		325		325	
Television Antenna 40' Pole							
	Demolish	Ea.		112		112	Includes material and labor to install stand-alone 1"-2" metal pole, 10' long. Cost does not include antenna.
	Install	Ea.	24	202		226	
	Demolish and Install	Ea.	24	314		338	
	Reinstall	Ea.		161.30		161.30	
	Clean	Ea.	.65	50.50		51.15	
	Paint	Ea.	18.80	55		73.80	
	Minimum Charge	Job		325		325	
Rotor Unit							
	Demolish	Ea.		89.50		89.50	Includes material and labor to install a television antenna rotor.
	Install	Ea.	64.50	80.50		145	
	Demolish and Install	Ea.	64.50	170		234.50	
	Reinstall	Ea.		64.52		64.52	
	Clean	Ea.	.65	50.50		51.15	
	Minimum Charge	Job		325		325	
Single Booster							
	Demolish	Ea.		89.50		89.50	Includes material and labor to install standard grade VHF television signal booster unit and all hardware required for connection to TV cable.
	Install	Ea.	31.50	80.50		112	
	Demolish and Install	Ea.	31.50	170		201.50	
	Reinstall	Ea.		64.52		64.52	
	Clean	Ea.	.03	6.35		6.38	
	Minimum Charge	Job		325		325	

Improvements / Appliances / Treatments

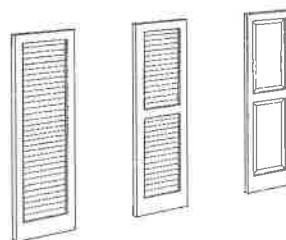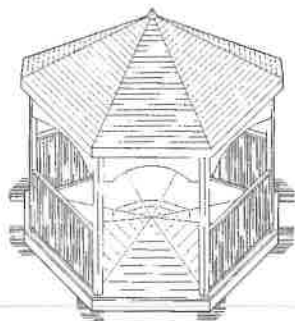

Gazebo

Gutter

Shutter

Window Treatment		Unit	Material	Labor	Equip.	Total	Specification
Drapery							
Good Grade							
	Install	L.F.	80	8.10		88.10	Includes material and labor to install good quality drapery.
	Reinstall	L.F.		6.48		6.48	
	Clean	L.F.	3.11	.20		3.31	
	Minimum Charge	Job		202		202	
Premium Grade							
	Install	L.F.	98.50	8.10		106.60	Includes material and labor to install premium quality drapery.
	Reinstall	L.F.		6.48		6.48	
	Clean	L.F.	3.11	.22		3.33	
	Minimum Charge	Job		202		202	
Lining							
	Install	L.F.	46	8.10		54.10	Includes material and labor to install drapery lining.
	Reinstall	L.F.		6.48		6.48	
	Clean	L.F.	2.05	.12		2.17	
	Minimum Charge	Job		202		202	
Valance Board							
	Demolish	L.F.		2.25		2.25	Includes material and labor to install a drapery valance board.
	Install	L.F.	14.35	16.20		30.55	
	Demolish and Install	L.F.	14.35	18.45		32.80	
	Reinstall	L.F.		12.95		12.95	
	Clean	L.F.	9.70	.40		10.10	
	Minimum Charge	Job		202		202	
Rod							
	Demolish	L.F.		5.60		5.60	Includes material and labor to install standard traverse drapery hardware.
	Install	L.F.	19.80	9.10		28.90	
	Demolish and Install	L.F.	19.80	14.70		34.50	
	Reinstall	L.F.		7.29		7.29	
	Clean	L.F.	.07	.41		.48	
	Paint	L.F.	.15	.85		1	
	Minimum Charge	Job		202		202	
Blinds							
Mini-type							
	Demolish	S.F.		1.17		1.17	Includes material and labor to install horizontal 1" slat blinds.
	Install	S.F.	9.30	.91		10.21	
	Demolish and Install	S.F.	9.30	2.08		11.38	
	Reinstall	S.F.		.73		.73	
	Clean	S.F.	5	.04		5.04	
	Minimum Charge	Job		202		202	

Improvements / Appliances / Treatments

Window Treatment		Unit	Material	Labor	Equip.	Total	Specification
Vertical Type							
	Demolish	S.F.		1.17		1.17	Includes material and labor to install vertical 3" - 5" cloth or PVC blinds.
	Install	S.F.	5.45	1.17		6.62	
	Demolish and Install	S.F.	5.45	2.34		7.79	
	Reinstall	S.F.		.93		.93	
	Clean	S.F.	2.13	.04		2.17	
	Minimum Charge	Job		202		202	
Vertical Type per L.F.							
	Demolish	L.F.		1.87		1.87	Includes material and labor to install vertical 3" - 5" cloth or PVC blinds x 72" long.
	Install	L.F.	32.50	5.40		37.90	
	Demolish and Install	L.F.	32.50	7.27		39.77	
	Reinstall	L.F.		4.32		4.32	
	Clean	L.F.	8.55	.28		8.83	
	Minimum Charge	Job		202		202	
Venetian Type							
	Demolish	S.F.		1.17		1.17	Includes material and labor to install horizontal 2" slat blinds.
	Install	S.F.	8.35	.91		9.26	
	Demolish and Install	S.F.	8.35	2.08		10.43	
	Reinstall	S.F.		.73		.73	
	Clean	S.F.	2.13	.04		2.17	
	Minimum Charge	Job		202		202	
Wood Shutter							
27" x 36", 4 Panel							
	Demolish	Ea.		37.50		37.50	Includes material and labor to install movable louver, up to 33" x 36", 4 panel shutter.
	Install	Pair	152	31.50		183.50	
	Demolish and Install	Pair	152	69		221	
	Reinstall	Pair		25.30		25.30	
	Clean	Ea.	.07	13.70		13.77	
	Paint	Ea.	3	31.50		34.50	
	Minimum Charge	Job		269		269	
33" x 36", 4 Panel							
	Demolish	Ea.		37.50		37.50	Includes material and labor to install movable louver, up to 33" x 36", 4 panel shutter.
	Install	Pair	152	31.50		183.50	
	Demolish and Install	Pair	152	69		221	
	Reinstall	Pair		25.30		25.30	
	Clean	Ea.	.07	13.70		13.77	
	Paint	Ea.	3.14	34		37.14	
	Minimum Charge	Job		269		269	
39" x 36", 4 Panel							
	Demolish	Ea.		37.50		37.50	Includes material and labor to install movable louver, up to 47" x 36", 4 panel shutter.
	Install	Pair	165	31.50		196.50	
	Demolish and Install	Pair	165	69		234	
	Reinstall	Pair		25.30		25.30	
	Clean	Ea.	.07	13.70		13.77	
	Paint	Ea.	3.14	34		37.14	
	Minimum Charge	Job		269		269	
47" x 36", 4 Panel							
	Demolish	Ea.		37.50		37.50	Includes material and labor to install movable louver, up to 47" x 36", 4 panel shutter.
	Install	Pair	165	31.50		196.50	
	Demolish and Install	Pair	165	69		234	
	Reinstall	Pair		25.30		25.30	
	Clean	Ea.	.07	13.70		13.77	
	Paint	Ea.	3.27	36.50		39.77	
	Minimum Charge	Job		269		269	

Improvements / Appliances / Treatments

Stairs		Unit	Material	Labor	Equip.	Total	Specification
Concrete Steps							
Precast							
	Demolish	Ea.		79	56	135	Includes material and labor to install precast concrete front entrance stairs, 4' wide, with 48" platform and 2 risers.
	Install	Flight	965	186	153	1304	
	Demolish and Install	Flight	965	265	209	1439	
	Clean	Ea.		5.60		5.60	
	Paint	Ea.	18.30	55		73.30	
	Minimum Charge	Job		490		490	
Metal							
Concrete Filled							
	Demolish	Ea.		22.50		22.50	Includes material and labor to install steel, cement filled metal pan stairs with picket rail.
	Install	Riser	780	81.50	6.40	867.90	
	Demolish and Install	Riser	780	104	6.40	890.40	
	Clean	Ea.	.10	3.48		3.58	
	Paint	Ea.	1.27	3.27		4.54	
	Minimum Charge	Job		300		300	
Landing							
	Demolish	S.F.		5.60		5.60	Includes material and labor to install pre-erected conventional steel pan landing.
	Install	S.F.	154	9.55	.75	164.30	
	Demolish and Install	S.F.	154	15.15	.75	169.90	
	Clean	S.F.	.10	.72		.82	
	Paint	S.F.	.43	.94		1.37	
	Minimum Charge	Job		300		300	
Railing							
	Demolish	L.F.		3.10		3.10	Includes material and labor to install primed steel pipe.
	Install	L.F.	22.50	13.85	1.09	37.44	
	Demolish and Install	L.F.	22.50	16.95	1.09	40.54	
	Clean	L.F.	.65	2.53		3.18	
	Paint	L.F.	1.80	7.35		9.15	
	Minimum Charge	Job		300		300	

Elevator		Unit	Material	Labor	Equip.	Total	Specification
2 Stop Residential							
	Install	Ea.	21600	8425		30025	Includes labor, material and equipment to install 2 stop elevator for residential use.
	Clean	Ea.	1.18	25.50		26.68	
	Minimum Charge	Job		840		840	
2 Stop Commercial							
	Install	Ea.	56000	16800		72800	Includes labor, material and equipment to install 2 stop elevator for apartment or commercial building with 2,000 lb/13 passenger capacity.
	Clean	Ea.	1.18	25.50		26.68	
	Minimum Charge	Job		840		840	
3 Stop Commercial							
	Install	Ea.	68000	25900		93900	Includes labor, material and equipment to install 3 stop elevator for apartment or commercial building with 2,000 lb/13 passenger capacity.
	Clean	Ea.	1.18	25.50		26.68	
	Minimum Charge	Job		840		840	
4 Stop Commercial							
	Install	Ea.	80500	35000		115500	Includes labor, material and equipment to install 4 stop elevator for apartment or commercial building with 2,000 lb/13 passenger capacity.
	Clean	Ea.	1.18	25.50		26.68	
	Minimum Charge	Job		840		840	

Improvements / Appliances / Treatments

Elevator		Unit	Material	Labor	Equip.	Total	Specification
5 Stop Commercial							
	Install	Ea.	92500	44300		136800	Includes labor, material and equipment to install 5 stop elevator for apartment or commercial building with 2,000 lb/13 passenger capacity.
	Clean	Ea.	1.18	25.50		26.68	
	Minimum Charge	Job		840		840	

Rangetop		Unit	Material	Labor	Equip.	Total	Specification
4-burner							
	Demolish	Ea.		41		41	Cost includes material and labor to install 4-burner electric surface unit.
	Install	Ea.	289	108		397	
	Demolish and Install	Ea.	289	149		438	
	Reinstall	Ea.		86.03		86.03	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	
6-burner							
	Demolish	Ea.		41		41	Includes material and labor to install a 6-burner cooktop unit.
	Install	Ea.	3850	129		3979	
	Demolish and Install	Ea.	3850	170		4020	
	Reinstall	Ea.		103.23		103.23	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	
Premium Brand w / Grill							
	Demolish	Ea.		41		41	Includes material and labor to install electric downdraft cooktop with grill.
	Install	Ea.	2475	129		2604	
	Demolish and Install	Ea.	2475	170		2645	
	Reinstall	Ea.		103.23		103.23	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	

Rangehood		Unit	Material	Labor	Equip.	Total	Specification
Vented							
30"							
	Demolish	Ea.		37.50		37.50	Includes material and labor to install a vented range hood.
	Install	Ea.	88.50	129		217.50	
	Demolish and Install	Ea.	88.50	166.50		255	
	Reinstall	Ea.		103.23		103.23	
	Clean	Ea.	.04	11.75		11.79	
	Minimum Charge	Job		101		101	
36"							
	Demolish	Ea.		37.50		37.50	Includes material and labor to install a vented range hood.
	Install	Ea.	274	129		403	
	Demolish and Install	Ea.	274	166.50		440.50	
	Reinstall	Ea.		103.23		103.23	
	Clean	Ea.	.04	11.75		11.79	
	Minimum Charge	Job		101		101	
42"							
	Demolish	Ea.		37.50		37.50	Includes material and labor to install a vented range hood.
	Install	Ea.	114	140		254	
	Demolish and Install	Ea.	114	177.50		291.50	
	Reinstall	Ea.		111.82		111.82	
	Clean	Ea.	.04	11.75		11.79	
	Minimum Charge	Job		101		101	

Improvements / Appliances / Treatments

Rangehood		Unit	Material	Labor	Equip.	Total	Specification
Ventless 30"	Demolish	Ea.		37.50		37.50	Includes material and labor to install a ventless range hood.
	Install	Ea.	101	80.50		181.50	
	Demolish and Install	Ea.	101	118		219	
	Reinstall	Ea.		64.52		64.52	
	Clean	Ea.	.04	11.75		11.79	
	Minimum Charge	Job		101		101	
36"	Demolish	Ea.		37.50		37.50	Includes material and labor to install a ventless range hood.
	Install	Ea.	285	129		414	
	Demolish and Install	Ea.	285	166.50		451.50	
	Reinstall	Ea.		103.23		103.23	
	Clean	Ea.	.04	11.75		11.79	
	Minimum Charge	Job		101		101	
42"	Demolish	Ea.		37.50		37.50	Includes material and labor to install a ventless range hood.
	Install	Ea.	196	108		304	
	Demolish and Install	Ea.	196	145.50		341.50	
	Reinstall	Ea.		86.03		86.03	
	Clean	Ea.	.04	11.75		11.79	
	Minimum Charge	Job		101		101	
Oven		Unit	Material	Labor	Equip.	Total	Specification
Free Standing	Demolish	Ea.		41		41	Cost includes material and labor to install 30" free standing electric range with self-cleaning oven.
	Install	Ea.	800	81		881	
	Demolish and Install	Ea.	800	122		922	
	Reinstall	Ea.		64.77		64.77	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	
Single Wall Oven	Demolish	Ea.		41		41	Includes material and labor to install a built-in oven.
	Install	Ea.	660	161		821	
	Demolish and Install	Ea.	660	202		862	
	Reinstall	Ea.		129.04		129.04	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	
Double Wall Oven	Demolish	Ea.		41		41	Includes material and labor to install a conventional double oven.
	Install	Ea.	2475	269		2744	
	Demolish and Install	Ea.	2475	310		2785	
	Reinstall	Ea.		215.04		215.04	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	
Drop-in Type w / Range	Demolish	Ea.		41		41	Includes material and labor to install a built-in cooking range with oven.
	Install	Ea.	985	108		1093	
	Demolish and Install	Ea.	985	149		1134	
	Reinstall	Ea.		86.03		86.03	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	

Improvements / Appliances / Treatments

Oven		Unit	Material	Labor	Equip.	Total	Specification
Hi/Lo w / Range, Microwave							
	Demolish	Ea.		41		41	Includes material and labor to install a double oven, one conventional, one microwave.
	Install	Ea.	3125	540		3665	
	Demolish and Install	Ea.	3125	581		3706	
	Reinstall	Ea.		430.08		430.08	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	
Hi/Lo w/ Range / Double Oven							
	Demolish	Ea.		41		41	Includes material and labor to install a conventional double oven.
	Install	Ea.	2475	269		2744	
	Demolish and Install	Ea.	2475	310		2785	
	Reinstall	Ea.		215.04		215.04	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	
Countertop Microwave							
	Demolish	Ea.		14.05		14.05	Includes material and labor to install a 1.0 cubic foot microwave oven.
	Install	Ea.	176	50.50		226.50	
	Demolish and Install	Ea.	176	64.55		240.55	
	Reinstall	Ea.		40.48		40.48	
	Clean	Ea.	.04	20.50		20.54	
	Minimum Charge	Job		101		101	
Cabinet / Wall Mounted Microwave							
	Demolish	Ea.		28		28	Includes material and labor to install a space saver microwave oven.
	Install	Ea.	2475	161		2636	
	Demolish and Install	Ea.	2475	189		2664	
	Reinstall	Ea.		129.04		129.04	
	Clean	Ea.	.04	20.50		20.54	
	Minimum Charge	Job		101		101	

Dryer		Unit	Material	Labor	Equip.	Total	Specification
Basic Grade							
	Demolish	Ea.		18.75		18.75	Includes material and labor to install electric or gas dryer. Vent kit not included.
	Install	Ea.	880	320		1200	
	Demolish and Install	Ea.	880	338.75		1218.75	
	Reinstall	Ea.		255.06		255.06	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	
Good Grade							
	Demolish	Ea.		18.75		18.75	Includes material and labor to install electric or gas dryer. Vent kit not included.
	Install	Ea.	1100	320		1420	
	Demolish and Install	Ea.	1100	338.75		1438.75	
	Reinstall	Ea.		255.06		255.06	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	
Premium Grade							
	Demolish	Ea.		18.75		18.75	Includes material and labor to install electric or gas dryer. Vent kit not included.
	Install	Ea.	1425	480		1905	
	Demolish and Install	Ea.	1425	498.75		1923.75	
	Reinstall	Ea.		382.59		382.59	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	

Improvements / Appliances / Treatments

Dryer		Unit	Material	Labor	Equip.	Total	Specification
Washer / Dryer Combination Unit							
	Demolish	Ea.		18.75		18.75	Includes material and labor to install electric washer/dryer combination unit, 27" wide, stackable or unitized.
	Install	Ea.	1750	81		1831	
	Demolish and Install	Ea.	1750	99.75		1849.75	
	Reinstall	Ea.		64.77		64.77	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	
Washer		Unit	Material	Labor	Equip.	Total	Specification
Basic Grade							
	Demolish	Ea.		18.75		18.75	Includes material and labor to install washing machine. New hoses not included.
	Install	Ea.	495	201		696	
	Demolish and Install	Ea.	495	219.75		714.75	
	Reinstall	Ea.		160.75		160.75	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	
Good Grade							
	Demolish	Ea.		18.75		18.75	Includes material and labor to install washing machine. New hoses not included.
	Install	Ea.	810	300		1110	
	Demolish and Install	Ea.	810	318.75		1128.75	
	Reinstall	Ea.		241.12		241.12	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	
Premium Grade							
	Demolish	Ea.		18.75		18.75	Includes material and labor to install washing machine with digital computer readouts and large capacity. New hoses not included.
	Install	Ea.	2400	605		3005	
	Demolish and Install	Ea.	2400	623.75		3023.75	
	Reinstall	Ea.		482.24		482.24	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	
Washer / Dryer Combination Unit							
	Demolish	Ea.		18.75		18.75	Includes material and labor to install electric washer/dryer combination unit, 27" wide, stackable or unitized.
	Install	Ea.	1750	81		1831	
	Demolish and Install	Ea.	1750	99.75		1849.75	
	Reinstall	Ea.		64.77		64.77	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	

Refrigerator		Unit	Material	Labor	Equip.	Total	Specification
12 Cubic Foot							
	Demolish	Ea.		56		56	Includes material and labor to install a refrigerator.
	Install	Ea.	595	81		676	
	Demolish and Install	Ea.	595	137		732	
	Reinstall	Ea.		64.77		64.77	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	
16 Cubic Foot							
	Demolish	Ea.		56		56	Includes material and labor to install a refrigerator.
	Install	Ea.	815	90		905	
	Demolish and Install	Ea.	815	146		961	
	Reinstall	Ea.		71.96		71.96	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	

Improvements / Appliances / Treatments

Refrigerator		Unit	Material	Labor	Equip.	Total	Specification
18 Cubic Foot							
	Demolish	Ea.		56		56	Includes material and labor to install a refrigerator.
	Install	Ea.	950	101		1051	
	Demolish and Install	Ea.	950	157		1107	
	Reinstall	Ea.		80.96		80.96	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	
21 Cubic Foot							
	Demolish	Ea.		56		56	Includes material and labor to install a refrigerator.
	Install	Ea.	1950	116		2066	
	Demolish and Install	Ea.	1950	172		2122	
	Reinstall	Ea.		92.53		92.53	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	
24 Cubic Foot							
	Demolish	Ea.		56		56	Includes material and labor to install a refrigerator.
	Install	Ea.	2575	116		2691	
	Demolish and Install	Ea.	2575	172		2747	
	Reinstall	Ea.		92.53		92.53	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	
27 Cubic Foot							
	Demolish	Ea.		56		56	Includes material and labor to install a refrigerator.
	Install	Ea.	2250	81		2331	
	Demolish and Install	Ea.	2250	137		2387	
	Reinstall	Ea.		64.77		64.77	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	
Ice Maker							
	Install	Ea.	120	75.50		195.50	Includes labor and material to install an automatic ice maker in a refrigerator.
	Minimum Charge	Job		101		101	

Freezer		Unit	Material	Labor	Equip.	Total	Specification
15 Cubic Foot							
	Demolish	Ea.		56		56	Cost includes material and labor to install 15 cubic foot freezer.
	Install	Ea.	920	81		1001	
	Demolish and Install	Ea.	920	137		1057	
	Reinstall	Ea.		64.77		64.77	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	
18 Cubic Foot							
	Demolish	Ea.		56		56	Cost includes material and labor to install 18 cubic foot freezer.
	Install	Ea.	1200	81		1281	
	Demolish and Install	Ea.	1200	137		1337	
	Reinstall	Ea.		64.77		64.77	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	
21 Cubic Foot							
	Demolish	Ea.		56		56	Includes material and labor to install a 15 to 23 cubic foot deep freezer.
	Install	Ea.	780	81		861	
	Demolish and Install	Ea.	780	137		917	
	Reinstall	Ea.		64.77		64.77	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	

Improvements / Appliances / Treatments

Freezer		Unit	Material	Labor	Equip.	Total	Specification
24 Cubic Foot							
	Demolish	Ea.		56		56	Includes material and labor to install a 24 cubic foot deep freezer.
	Install	Ea.	870	162		1032	
	Demolish and Install	Ea.	870	218		1088	
	Reinstall	Ea.		129.54		129.54	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	
Chest-type							
	Demolish	Ea.		56		56	Cost includes material and labor to install 15 cubic foot freezer.
	Install	Ea.	920	81		1001	
	Demolish and Install	Ea.	920	137		1057	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	
Dishwasher							
4 Cycle							
	Demolish	Ea.		45		45	Includes material and labor to install good grade automatic dishwasher.
	Install	Ea.	710	191		901	
	Demolish and Install	Ea.	710	236		946	
	Reinstall	Ea.		152.82		152.82	
	Clean	Ea.	.04	41		41.04	
	Minimum Charge	Job		101		101	
Garbage Disposal							
In Sink Unit							
	Demolish	Ea.		42		42	Cost includes material and labor to install 1/2 HP custom disposal unit.
	Install	Ea.	274	76.50		350.50	
	Demolish and Install	Ea.	274	118.50		392.50	
	Reinstall	Ea.		61.13		61.13	
	Clean	Ea.	.02	11.75		11.77	
	Minimum Charge	Job		101		101	
Trash Compactor							
4 to 1 Compaction							
	Demolish	Ea.		45		45	Includes material and labor to install a trash compactor.
	Install	Ea.	1700	108		1808	
	Demolish and Install	Ea.	1700	153		1853	
	Reinstall	Ea.		86.02		86.02	
	Clean	Ea.	.04	25.50		25.54	
	Minimum Charge	Job		101		101	
Kitchenette Unit							
Range, Refrigerator and Sink							
	Demolish	Ea.		179		179	Includes material and labor to install range/refrigerator/sink unit, 72" wide, base unit only.
	Install	Ea.	2725	635		3360	
	Demolish and Install	Ea.	2725	814		3539	
	Reinstall	Ea.		509.40		509.40	
	Clean	Ea.	.81	20.50		21.31	
	Minimum Charge	Job		101		101	

Improvements / Appliances / Treatments

Bath Accessories		Unit	Material	Labor	Equip.	Total	Specification
Towel Bar							
	Demolish	Ea.		9.35		9.35	Includes material and labor to install towel bar up to 24" long.
	Install	Ea.	16.55	22.50		39.05	
	Demolish and Install	Ea.	16.55	31.85		48.40	
	Reinstall	Ea.		17.92		17.92	
	Clean	Ea.		5.05		5.05	
	Minimum Charge	Job		269		269	
Toothbrush Holder							
	Demolish	Ea.		9.35		9.35	Includes material and labor to install a surface mounted tumbler and toothbrush holder.
	Install	Ea.	22.50	27		49.50	
	Demolish and Install	Ea.	22.50	36.35		58.85	
	Reinstall	Ea.		21.50		21.50	
	Clean	Ea.		5.05		5.05	
	Minimum Charge	Job		269		269	
Grab Rail							
	Demolish	Ea.		14.05		14.05	Includes material and labor to install a 24" long grab bar. Blocking is not included.
	Install	Ea.	44.50	23.50		68	
	Demolish and Install	Ea.	44.50	37.55		82.05	
	Reinstall	Ea.		18.70		18.70	
	Clean	Ea.	.33	8.45		8.78	
	Minimum Charge	Job		269		269	
Soap Dish							
	Demolish	Ea.		9.35		9.35	Includes material and labor to install a surface mounted soap dish.
	Install	Ea.	8.05	27		35.05	
	Demolish and Install	Ea.	8.05	36.35		44.40	
	Reinstall	Ea.		21.50		21.50	
	Clean	Ea.		5.05		5.05	
	Minimum Charge	Job		269		269	
Toilet Paper Roller							
	Demolish	Ea.		9.35		9.35	Includes material and labor to install a surface mounted toilet tissue dispenser.
	Install	Ea.	23.50	17.90		41.40	
	Demolish and Install	Ea.	23.50	27.25		50.75	
	Reinstall	Ea.		14.34		14.34	
	Clean	Ea.	.33	12.65		12.98	
	Minimum Charge	Job		269		269	
Dispenser Soap							
	Demolish	Ea.		12.50		12.50	Includes material and labor to install a surface mounted soap dispenser.
	Install	Ea.	44	27		71	
	Demolish and Install	Ea.	44	39.50		83.50	
	Reinstall	Ea.		21.50		21.50	
	Clean	Ea.	.33	12.65		12.98	
	Minimum Charge	Job		269		269	
Towel							
	Demolish	Ea.		14.05		14.05	Includes material and labor to install a surface mounted towel dispenser.
	Install	Ea.	82	33.50		115.50	
	Demolish and Install	Ea.	82	47.55		129.55	
	Reinstall	Ea.		26.88		26.88	
	Clean	Ea.	.33	16.85		17.18	
	Minimum Charge	Job		269		269	
Seat Cover							
	Demolish	Ea.		9.35		9.35	Includes material and labor to install a surface mounted toilet seat cover dispenser.
	Install	Ea.	59	36		95	
	Demolish and Install	Ea.	59	45.35		104.35	
	Reinstall	Ea.		28.67		28.67	
	Clean	Ea.	.33	12.65		12.98	
	Minimum Charge	Job		269		269	

Improvements / Appliances / Treatments

Bath Accessories		Unit	Material	Labor	Equip.	Total	Specification
Sanitary Napkin							
	Demolish	Ea.		23.50		23.50	Includes material and labor to install a surface mounted sanitary napkin dispenser.
	Install	Ea.	206	56.50		262.50	
	Demolish and Install	Ea.	206	80		286	
	Reinstall	Ea.		45.27		45.27	
	Clean	Ea.	.17	16.85		17.02	
	Minimum Charge	Job		269		269	
Partition							
Urinal							
	Demolish	Ea.		28		28	Includes material and labor to install a urinal screen.
	Install	Ea.	365	134		499	
	Demolish and Install	Ea.	365	162		527	
	Reinstall	Ea.		107.52		107.52	
	Clean	Ea.	.50	11.25		11.75	
	Minimum Charge	Job		269		269	
Toilet							
	Demolish	Ea.		83.50		83.50	Includes material and labor to install baked enamel standard size partition, floor or ceiling mounted with one wall and one door.
	Install	Ea.	1175	215		1390	
	Demolish and Install	Ea.	1175	298.50		1473.50	
	Reinstall	Ea.		172.03		172.03	
	Clean	Ea.	3.27	25.50		28.77	
	Minimum Charge	Job		269		269	
Handicap							
	Demolish	Ea.		83.50		83.50	Includes material and labor to install baked enamel handicap partition, floor or ceiling mounted with one wall and one door.
	Install	Ea.	1350	215		1565	
	Demolish and Install	Ea.	1350	298.50		1648.50	
	Reinstall	Ea.		172.03		172.03	
	Clean	Ea.	3.27	25.50		28.77	
	Minimum Charge	Job		269		269	

Fire Prevention / Protection		Unit	Material	Labor	Equip.	Total	Specification
Fire Extinguisher							
5# Carbon Dioxide							
	Install	Ea.	320			320	Includes labor and material to install one wall mounted 5 lb. carbon dioxide factory charged unit, complete with hose, horn and wall mounting bracket.
10# Carbon Dioxide							
	Install	Ea.	475			475	Includes labor and material to install one wall mounted 10 lb. carbon dioxide factory charged unit, complete with hose, horn and wall mounting bracket.
15# Carbon Dioxide							
	Install	Ea.	580			580	Includes labor and material to install one wall mounted 15 lb. carbon dioxide factory charged unit, complete with hose, horn and wall mounting bracket.

Improvements / Appliances / Treatments

Fire Prevention / Protection		Unit	Material	Labor	Equip.	Total	Specification
5# Dry Chemical	Install	Ea.	82			82	Includes labor and material to install one wall mounted 5 lb. dry chemical factory charged unit, complete with hose, horn and wall mounting bracket.
20# Dry Chemical	Install	Ea.	276			276	Includes labor and material to install one wall mounted 20 lb. dry chemical factory charged unit, complete with hose, horn and wall mounting bracket.

Gutters		Unit	Material	Labor	Equip.	Total	Specification
Galvanized							
	Demolish	L.F.		1.87		1.87	Cost includes material and labor to install 5" galvanized steel gutter with enamel finish, fittings, hangers, and corners.
	Install	L.F.	4.84	4.72		9.56	
	Demolish and Install	L.F.	4.84	6.59		11.43	
	Reinstall	L.F.		3.77		3.77	
	Clean	L.F.		.54		.54	
	Paint	L.F.	.51	1.36		1.87	
	Minimum Charge	Job		295		295	
Aluminum							
	Demolish	L.F.		1.87		1.87	
	Install	L.F.	3.03	4.72		7.75	
	Demolish and Install	L.F.	3.03	6.59		9.62	
	Reinstall	L.F.		3.77		3.77	
	Clean	L.F.		.54		.54	
	Paint	L.F.	.51	1.36		1.87	
	Minimum Charge	Job		295		295	
Copper							
	Demolish	L.F.		1.87		1.87	Cost includes material and labor to install 5" half-round copper gutter with fittings, hangers, and corners.
	Install	L.F.	11.60	4.72		16.32	
	Demolish and Install	L.F.	11.60	6.59		18.19	
	Reinstall	L.F.		3.77		3.77	
	Clean	L.F.		.54		.54	
	Minimum Charge	Job		295		295	
Plastic							
	Demolish	L.F.		1.87		1.87	Cost includes material and labor to install 4" white vinyl gutter fittings, hangers, and corners.
	Install	L.F.	2.82	4.67		7.49	
	Demolish and Install	L.F.	2.82	6.54		9.36	
	Reinstall	L.F.		3.74		3.74	
	Clean	L.F.		.54		.54	
	Paint	L.F.	.51	1.36		1.87	
	Minimum Charge	Job		295		295	

Downspouts		Unit	Material	Labor	Equip.	Total	Specification
Galvanized							
	Demolish	L.F.		1.29		1.29	Cost includes material and labor to install 4" diameter downspout with enamel finish.
	Install	L.F.	7.25	4.07		11.32	
	Demolish and Install	L.F.	7.25	5.36		12.61	
	Reinstall	L.F.		3.25		3.25	
	Clean	L.F.		.54		.54	
	Paint	L.F.	.51	1.36		1.87	
	Minimum Charge	Job		295		295	

Improvements / Appliances / Treatments

Downspouts		Unit	Material	Labor	Equip.	Total	Specification
Aluminum							
	Demolish	L.F.		1.29		1.29	Includes material and labor to install aluminum enameled downspout.
	Install	L.F.	4.73	4.21		8.94	
	Demolish and Install	L.F.	4.73	5.50		10.23	
	Reinstall	L.F.		3.37		3.37	
	Clean	L.F.		.54		.54	
	Paint	L.F.	.51	1.36		1.87	
	Minimum Charge	Job		295		295	
Copper							
	Demolish	L.F.		1.29		1.29	Includes material and labor to install round copper downspout.
	Install	L.F.	17.10	3.10		20.20	
	Demolish and Install	L.F.	17.10	4.39		21.49	
	Reinstall	L.F.		2.48		2.48	
	Clean	L.F.		.54		.54	
	Paint	L.F.	.51	1.36		1.87	
	Minimum Charge	Job		295		295	
Plastic							
	Demolish	L.F.		1.29		1.29	Cost includes material and labor to install 2" x 3" vinyl rectangular downspouts.
	Install	L.F.	3.83	2.81		6.64	
	Demolish and Install	L.F.	3.83	4.10		7.93	
	Reinstall	L.F.		2.25		2.25	
	Clean	L.F.		.54		.54	
	Paint	L.F.	.51	1.36		1.87	
	Minimum Charge	Job		295		295	

Shutters		Unit	Material	Labor	Equip.	Total	Specification
Exterior							
25" High							
	Demolish	Ea.		14.05		14.05	Includes material and labor to install pair of exterior shutters 25" x 16", unpainted, installed as fixed shutters on concrete or wood frame.
	Install	Pair	240	54		294	
	Demolish and Install	Pair	240	68.05		308.05	
	Reinstall	Pair		53.76		53.76	
	Clean	Ea.	.07	13.70		13.77	
	Paint	Ea.	3.98	23.50		27.48	
	Minimum Charge	Job		269		269	
39" High							
	Demolish	Ea.		14.05		14.05	Includes material and labor to install pair of shutters 39" x 16", unpainted, installed as fixed shutters on concrete or wood frame.
	Install	Pair	335	54		389	
	Demolish and Install	Pair	335	68.05		403.05	
	Reinstall	Pair		53.76		53.76	
	Clean	Ea.	.07	13.70		13.77	
	Paint	Ea.	6.20	32		38.20	
	Minimum Charge	Job		269		269	
51" High							
	Demolish	Ea.		14.05		14.05	Includes material and labor to install pair of shutters 51" x 16", unpainted, installed as fixed shutters on concrete or wood frame.
	Install	Pair	430	54		484	
	Demolish and Install	Pair	430	68.05		498.05	
	Reinstall	Pair		53.76		53.76	
	Clean	Ea.	.07	13.70		13.77	
	Paint	Ea.	8.05	33		41.05	
	Minimum Charge	Job		269		269	

Improvements / Appliances / Treatments

Shutters		Unit	Material	Labor	Equip.	Total	Specification
59" High							
	Demolish	Ea.		14.05		14.05	Includes material and labor to install pair of shutters 59" x 16", unpainted, installed as fixed shutters on concrete or wood frame.
	Install	Pair	585	54		639	
	Demolish and Install	Pair	585	68.05		653.05	
	Reinstall	Pair		53.76		53.76	
	Clean	Ea.	.07	13.70		13.77	
	Paint	Ea.	9.30	36.50		45.80	
	Minimum Charge	Job		269		269	
67" High							
	Demolish	Ea.		14.05		14.05	Includes material and labor to install pair of shutters 67" x 16", unpainted, installed as fixed shutters on concrete or wood frame.
	Install	Pair	620	59.50		679.50	
	Demolish and Install	Pair	620	73.55		693.55	
	Reinstall	Pair		59.73		59.73	
	Clean	Ea.	.07	13.70		13.77	
	Paint	Ea.	10.60	41		51.60	
	Minimum Charge	Job		269		269	
Interior Wood							
23" x 24", 2 Panel							
	Demolish	Ea.		14.05		14.05	Cost includes material and labor to install 23" x 24", 4 panel interior movable pine shutter, 1-1/4" louver, knobs and hooks and hinges.
	Install	Ea.	278	31.50		309.50	
	Demolish and Install	Ea.	278	45.55		323.55	
	Reinstall	Ea.		25.30		25.30	
	Clean	Ea.	.07	13.70		13.77	
	Paint	Ea.	3	31.50		34.50	
	Minimum Charge	Job		269		269	
27" x 24", 4 Panel							
	Demolish	Ea.		14.05		14.05	Cost includes material and labor to install 27" x 24", 4 panel interior movable pine shutter, 1-1/4" louver, knobs and hooks and hinges.
	Install	Ea.	284	31.50		315.50	
	Demolish and Install	Ea.	284	45.55		329.55	
	Reinstall	Ea.		25.30		25.30	
	Clean	Ea.	.07	13.70		13.77	
	Paint	Ea.	3	31.50		34.50	
	Minimum Charge	Job		269		269	
31" x 24", 4 Panel							
	Demolish	Ea.		14.05		14.05	Cost includes material and labor to install 31" x 24", 4 panel interior movable pine shutter, 1-1/4" louver, knobs and hooks and hinges.
	Install	Ea.	310	31.50		341.50	
	Demolish and Install	Ea.	310	45.55		355.55	
	Reinstall	Ea.		25.30		25.30	
	Clean	Ea.	.07	13.70		13.77	
	Paint	Ea.	3	31.50		34.50	
	Minimum Charge	Job		269		269	
35" x 24", 4 Panel							
	Demolish	Ea.		14.05		14.05	Cost includes material and labor to install 35" x 24", 4 panel interior movable pine shutter, 1-1/4" louver, knobs and hooks and hinges.
	Install	Ea.	335	31.50		366.50	
	Demolish and Install	Ea.	335	45.55		380.55	
	Reinstall	Ea.		25.30		25.30	
	Clean	Ea.	.07	13.70		13.77	
	Paint	Ea.	3	31.50		34.50	
	Minimum Charge	Job		269		269	
39" x 24", 4 Panel							
	Demolish	Ea.		14.05		14.05	Cost includes material and labor to install 39" x 24", 4 panel interior movable pine shutter, 1-1/4" louver, knobs and hooks and hinges.
	Install	Ea.	375	31.50		406.50	
	Demolish and Install	Ea.	375	45.55		420.55	
	Reinstall	Ea.		25.30		25.30	
	Clean	Ea.	.07	13.70		13.77	
	Paint	Ea.	3	31.50		34.50	
	Minimum Charge	Job		269		269	

Improvements / Appliances / Treatments

Shutters		Unit	Material	Labor	Equip.	Total	Specification
47" x 24", 4 Panel							
	Demolish	Ea.		14.05		14.05	Cost includes material and labor to install 47" x 24", 4 panel interior movable pine shutter, 1-1/4" louver, knobs and hooks and hinges.
	Install	Ea.	425	31.50		456.50	
	Demolish and Install	Ea.	425	45.55		470.55	
	Reinstall	Ea.		25.30		25.30	
	Clean	Ea.	.07	13.70		13.77	
	Paint	Ea.	3.14	34		37.14	
	Minimum Charge	Job		269		269	
Awning		Unit	Material	Labor	Equip.	Total	Specification
Standard Aluminum							
36" Wide x 30" Deep							
	Demolish	Ea.		14.05		14.05	Includes material and labor to install one aluminum awning with weather-resistant finish.
	Install	Ea.	330	45		375	
	Demolish and Install	Ea.	330	59.05		389.05	
	Reinstall	Ea.		35.84		35.84	
	Clean	Ea.		16.85		16.85	
	Minimum Charge	Job		269		269	
48" Wide x 30" Deep							
	Demolish	Ea.		14.05		14.05	Includes material and labor to install one aluminum awning with weather-resistant finish.
	Install	Ea.	335	54		389	
	Demolish and Install	Ea.	335	68.05		403.05	
	Reinstall	Ea.		43.01		43.01	
	Clean	Ea.		16.85		16.85	
	Minimum Charge	Job		269		269	
60" Wide x 30" Deep							
	Demolish	Ea.		28		28	Includes material and labor to install one aluminum awning with weather-resistant finish.
	Install	Ea.	385	59.50		444.50	
	Demolish and Install	Ea.	385	87.50		472.50	
	Reinstall	Ea.		47.79		47.79	
	Clean	Ea.		16.85		16.85	
	Minimum Charge	Job		269		269	
72" Wide x 30" Deep							
	Demolish	Ea.		28		28	Includes material and labor to install one aluminum awning with weather-resistant finish.
	Install	Ea.	405	67		472	
	Demolish and Install	Ea.	405	95		500	
	Reinstall	Ea.		53.76		53.76	
	Clean	Ea.		16.85		16.85	
	Minimum Charge	Job		269		269	
Roll-up Type							
	Demolish	S.F.		1.01		1.01	Includes material and labor to install an aluminum roll-up awning.
	Install	S.F.	32.50	5.40		37.90	
	Demolish and Install	S.F.	32.50	6.41		38.91	
	Reinstall	S.F.		4.30		4.30	
	Clean	S.F.	.03	.84		.87	
	Minimum Charge	Job		269		269	
Canvas							
30" Wide							
	Demolish	Ea.		8.45		8.45	Includes material and labor to install a canvas window awning.
	Install	Ea.	118	45		163	
	Demolish and Install	Ea.	118	53.45		171.45	
	Reinstall	Ea.		35.84		35.84	
	Clean	Ea.		5.05		5.05	
	Minimum Charge	Job		269		269	

Improvements / Appliances / Treatments

Awning		Unit	Material	Labor	Equip.	Total	Specification
36" Wide							
	Demolish	Ea.		8.45		8.45	Includes material and labor to install a canvas window awning.
	Install	Ea.	118	54		172	
	Demolish and Install	Ea.	118	62.45		180.45	
	Reinstall	Ea.		43.01		43.01	
	Clean	Ea.		5.55		5.55	
	Minimum Charge	Job		269		269	
42" Wide							
	Demolish	Ea.		8.45		8.45	Includes material and labor to install a canvas window awning.
	Install	Ea.	91.50	67		158.50	
	Demolish and Install	Ea.	91.50	75.45		166.95	
	Reinstall	Ea.		53.76		53.76	
	Clean	Ea.		6.60		6.60	
	Minimum Charge	Job		269		269	
48" Wide							
	Demolish	Ea.		8.45		8.45	Includes material and labor to install a canvas window awning.
	Install	Ea.	98.50	77		175.50	
	Demolish and Install	Ea.	98.50	85.45		183.95	
	Reinstall	Ea.		61.44		61.44	
	Clean	Ea.		7.65		7.65	
	Minimum Charge	Job		269		269	
Cloth Canopy Cover							
8' x 10'							
	Demolish	Ea.		465		465	Includes material and labor to install one 8' x 10' cloth canopy patio cover with front bar and tension support rafters and 9" valance.
	Install	Ea.	84.50	269		353.50	
	Demolish and Install	Ea.	84.50	734		818.50	
	Reinstall	Ea.		215.04		215.04	
	Clean	Ea.	2.62	67.50		70.12	
	Minimum Charge	Job		540		540	
8' x 15'							
	Demolish	Ea.		465		465	Includes material and labor to install one 8' x 15' cloth canopy patio cover with front bar and tension support rafters and 9" valance.
	Install	Ea.	189	269		458	
	Demolish and Install	Ea.	189	734		923	
	Reinstall	Ea.		215.04		215.04	
	Clean	Ea.	2.62	101		103.62	
	Minimum Charge	Job		540		540	

Vent		Unit	Material	Labor	Equip.	Total	Specification
Small Roof Turbine							
	Demolish	Ea.		14.05		14.05	Includes material and labor to install spinner ventilator, wind driven, galvanized, 4" neck diam, 180 CFM.
	Install	Ea.	120	53		173	
	Demolish and Install	Ea.	120	67.05		187.05	
	Reinstall	Ea.		42.46		42.46	
	Clean	Ea.		9		9	
	Minimum Charge	Job		300		300	
Large Roof Turbine							
	Demolish	Ea.		11.25		11.25	Includes material and labor to install spinner ventilator, wind driven, galvanized, 8" neck diam, 360 CFM.
	Install	Ea.	131	76		207	
	Demolish and Install	Ea.	131	87.25		218.25	
	Reinstall	Ea.		60.66		60.66	
	Clean	Ea.		10.10		10.10	
	Minimum Charge	Job		300		300	

Improvements / Appliances / Treatments

Vent		Unit	Material	Labor	Equip.	Total	Specification
Gable Louvered	Demolish	Ea.		28		28	Includes material and labor to install a vinyl gable end vent.
	Install	Ea.	69	17.90		86.90	
	Demolish and Install	Ea.	69	45.90		114.90	
	Reinstall	Ea.		14.34		14.34	
	Clean	Ea.		5.40		5.40	
	Paint	Ea.	2.51	6.80		9.31	
	Minimum Charge	Job		269		269	
Ridge Vent	Demolish	L.F.		1.45		1.45	Includes material and labor to install a mill finish aluminum ridge vent strip.
	Install	L.F.	4.64	3.80		8.44	
	Demolish and Install	L.F.	4.64	5.25		9.89	
	Minimum Charge	Job		269		269	
Foundation	Demolish	Ea.		10.35		10.35	Includes material and labor to install galvanized foundation block vent.
	Install	Ea.	135	17.75		152.75	
	Demolish and Install	Ea.	135	28.10		163.10	
	Reinstall	Ea.		14.20		14.20	
	Clean	Ea.	.17	10.10		10.27	
	Minimum Charge	Job		269		269	
Frieze	Demolish	L.F.		1		1	Includes material and labor to install pine frieze board.
	Install	L.F.	.95	2.15		3.10	
	Demolish and Install	L.F.	.95	3.15		4.10	
	Reinstall	L.F.		1.72		1.72	
	Clean	L.F.	.03	.34		.37	
	Minimum Charge	Job		269		269	
Water Heater Cap	Demolish	Ea.		21		21	Includes material and labor to install a galvanized steel water heater cap.
	Install	Ea.	72	73.50		145.50	
	Demolish and Install	Ea.	72	94.50		166.50	
	Reinstall	Ea.		58.96		58.96	
	Clean	Ea.	1.14	25.50		26.64	

Cupolas		Unit	Material	Labor	Equip.	Total	Specification
22" x 22"	Demolish	Ea.		266		266	Includes material and labor to install a cedar cupola with aluminum roof covering.
	Install	Ea.	480	134		614	
	Demolish and Install	Ea.	480	400		880	
	Reinstall	Ea.		107.52		107.52	
	Minimum Charge	Job		269		269	
29" x 29"	Demolish	Ea.		266		266	Includes material and labor to install a cedar cupola with aluminum roof covering.
	Install	Ea.	1350	134		1484	
	Demolish and Install	Ea.	1350	400		1750	
	Reinstall	Ea.		107.52		107.52	
	Minimum Charge	Job		269		269	
35" x 35"	Demolish	Ea.		266		266	Includes material and labor to install a cedar cupola with aluminum roof covering.
	Install	Ea.	1575	179		1754	
	Demolish and Install	Ea.	1575	445		2020	
	Reinstall	Ea.		143.36		143.36	
	Minimum Charge	Job		269		269	

Improvements / Appliances / Treatments

Cupolas		Unit	Material	Labor	Equip.	Total	Specification
47" x 47"							
	Demolish	Ea.		266		266	Includes material and labor to install a cedar cupola with aluminum roof covering.
	Install	Ea.	2575	269		2844	
	Demolish and Install	Ea.	2575	535		3110	
	Reinstall	Ea.		215.04		215.04	
	Minimum Charge	Job		269		269	
Weather Vane							
	Install	Ea.	257	67		324	Includes minimum labor and equipment to install residential type weathervane.
	Minimum Charge	Job		269		269	

Aluminum Carport		Unit	Material	Labor	Equip.	Total	Specification
20' x 20' Complete							
	Demolish	Ea.		281		281	Includes material, labor and equipment to install an aluminum carport. Foundations are not included.
	Install	Ea.	4225	870	305	5400	
	Demolish and Install	Ea.	4225	1151	305	5681	
	Reinstall	Ea.		694.56	244.80	939.36	
	Clean	Ea.	.17	101		101.17	
	Minimum Charge	Job		540		540	
24' x 24' Complete							
	Demolish	Ea.		281		281	Includes material, labor and equipment to install an aluminum carport. Foundations are not included.
	Install	Ea.	4225	1150	410	5785	
	Demolish and Install	Ea.	4225	1431	410	6066	
	Reinstall	Ea.		926.08	326.40	1252.48	
	Clean	Ea.	.17	202		202.17	
	Minimum Charge	Job		540		540	
Metal Support Posts							
	Demolish	Ea.		3.75		3.75	Includes material and labor to install metal support posts for a carport.
	Install	Ea.	605	67		672	
	Demolish and Install	Ea.	605	70.75		675.75	
	Reinstall	Ea.		53.76		53.76	
	Clean	Ea.	.17	4.22		4.39	
	Paint	Ea.	.45	8.80		9.25	
	Minimum Charge	Job		540		540	

Storage Shed		Unit	Material	Labor	Equip.	Total	Specification
Aluminum							
Pre-fab (8' x 10')							
	Demolish	Ea.		82		82	Includes material and labor to install an aluminum storage shed.
	Install	Ea.	405	795		1200	
	Demolish and Install	Ea.	405	877		1282	
	Clean	Ea.	1.09	50.50		51.59	
	Minimum Charge	Ea.		605		605	
Pre-fab (10' x 12')							
	Demolish	Ea.		155		155	Includes material and labor to install an aluminum storage shed.
	Install	Ea.	1600	795		2395	
	Demolish and Install	Ea.	1600	950		2550	
	Clean	Ea.	1.09	56		57.09	
	Minimum Charge	Ea.		605		605	

Improvements / Appliances / Treatments

Storage Shed		Unit	Material	Labor	Equip.	Total	Specification
Wood							
Pre-fab (8' x 10')							
	Demolish	Ea.		82		82	Includes material and labor to install a pre-fabricated wood storage shed.
	Install	Ea.	5500	795		6295	
	Demolish and Install	Ea.	5500	877		6377	
	Clean	Ea.	1.09	50.50		51.59	
	Minimum Charge	Ea.		605		605	
Pre-fab (10' x 12')							
	Demolish	Ea.		155		155	Includes material and labor to install a pre-fabricated wood storage shed.
	Install	Ea.	7475	795		8270	
	Demolish and Install	Ea.	7475	950		8425	
	Clean	Ea.	1.09	56		57.09	
	Minimum Charge	Ea.		605		605	

Gazebo		Unit	Material	Labor	Equip.	Total	Specification
Good Grade							
	Demolish	S.F.		4.50		4.50	Includes material and labor to install a gazebo.
	Install	S.F.	17.10	40.50		57.60	
	Demolish and Install	S.F.	17.10	45		62.10	
	Reinstall	S.F.		32.26		32.26	
	Clean	S.F.	.13	2.70		2.83	
	Minimum Charge	Job		269		269	
Custom Grade							
	Demolish	S.F.		4.50		4.50	Includes material and labor to install a gazebo.
	Install	S.F.	29.50	40.50		70	
	Demolish and Install	S.F.	29.50	45		74.50	
	Reinstall	S.F.		32.26		32.26	
	Clean	S.F.	.13	2.70		2.83	
	Minimum Charge	Job		269		269	
Bench Seating							
	Demolish	L.F.		7.50		7.50	Includes material and labor to install pressure treated bench seating.
	Install	L.F.	3.33	27		30.33	
	Demolish and Install	L.F.	3.33	34.50		37.83	
	Reinstall	L.F.		21.50		21.50	
	Clean	L.F.	.13	2.02		2.15	
	Paint	L.F.	1.30	3.53		4.83	
	Minimum Charge	Job		269		269	
Re-screen							
	Install	S.F.	5.50	2.15		7.65	Includes labor and material to re-screen wood frame.
	Minimum Charge	Job		269		269	

Pool		Unit	Material	Labor	Equip.	Total	Specification
Screen Enclosure							
Re-screen							
	Install	SF Wall	.06	6.05		6.11	Includes material and labor to install a screen enclosure for a pool.
	Minimum Charge	Job		269		269	
Screen Door							
	Demolish	Ea.		10.65		10.65	Includes material and labor to install wood screen door with aluminum cloth screen. Frame and hardware not included.
	Install	Ea.	770	89.50		859.50	
	Demolish and Install	Ea.	770	100.15		870.15	
	Reinstall	Ea.		71.68		71.68	
	Clean	Ea.	.12	16.40		16.52	
	Paint	Ea.	10.80	17.65		28.45	
	Minimum Charge	Job		269		269	

Improvements / Appliances / Treatments

Pool		Unit	Material	Labor	Equip.	Total	Specification
Heater / Motor	Demolish	Ea.		55.50		55.50	Includes material and labor to install swimming pool heater, not incl. base or pad, elec., 12 kW, 4,800 gal pool, incl. pump.
	Install	Ea.	4300	720		5020	
	Demolish and Install	Ea.	4300	775.50		5075.50	
	Reinstall	Ea.		575		575	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		320		320	
Filter System	Demolish	Ea.		90		90	Includes material, labor and equipment to install sand filter system tank including hook-up to existing equipment. Pump and motor not included.
	Install	Total	8475	480		8955	
	Demolish and Install	Total	8475	570		9045	
	Reinstall	Total		385.79		385.79	
	Minimum Charge	Job		300		300	
Pump / Motor	Demolish	Ea.		55.50		55.50	Includes material and labor to install a 22 GPM pump.
	Install	Ea.	845	121		966	
	Demolish and Install	Ea.	845	176.50		1021.50	
	Reinstall	Ea.		96.45		96.45	
	Clean	Ea.	3.27	50.50		53.77	
	Minimum Charge	Job		320		320	
Pump Water	Install	Day		570	120	690	Includes labor and equipment to pump water from a swimming pool.
	Minimum Charge	Job		266		266	
Replaster	Install	SF Surf	1.38	13.75		15.13	Includes labor and material to replaster gunite pool with a surface area of 500 to 600 S.F.
	Minimum Charge	Job		266		266	
Solar Panels	Demolish	S.F.		2.23		2.23	Includes material and labor to install solar panel.
	Install	S.F.	40	3.97		43.97	
	Demolish and Install	S.F.	40	6.20		46.20	
	Reinstall	S.F.		3.17		3.17	
	Minimum Charge	Ea.		605		605	



Construction Clean-up		Unit	Material	Labor	Equip.	Total	Specification
Final	Clean Minimum Charge	S.F. Job		.35 202		.35 202	Includes labor for final site/job clean-up including detail cleaning.

Location Factors - Residential

Costs shown in *Residential Costs with RSMeans Data* are based on national averages for materials and installation. To adjust these costs to a specific location, simply multiply the base cost by the factor for

that city. The data is arranged alphabetically by state and postal zip code numbers. For a city not listed, use the factor for a nearby city with similar economic characteristics.

STATE	CITY	Residential
ALABAMA		
350-352	Birmingham	.89
354	Tuscaloosa	.88
355	Jasper	.87
356	Decatur	.87
357-358	Huntsville	.88
359	Gadsden	.86
360-361	Montgomery	.89
362	Anniston	.85
363	Dothan	.89
364	Evergreen	.87
365-366	Mobile	.86
367	Selma	.86
368	Phenix City	.86
369	Butler	.85
ALASKA		
995-996	Anchorage	1.13
997	Fairbanks	1.14
998	Juneau	1.13
999	Ketchikan	1.19
ARIZONA		
850,853	Phoenix	.90
851,852	Mesa/Tempe	.90
855	Globe	.89
856-857	Tucson	.91
859	Show Low	.91
860	Flagstaff	.91
863	Prescott	.90
864	Kingman	.89
865	Chambers	.89
ARKANSAS		
716	Pine Bluff	.87
717	Camden	.84
718	Texarkana	.87
719	Hot Springs	.83
720-722	Little Rock	.86
723	West Memphis	.86
724	Jonesboro	.86
725	Batesville	.82
726	Harrison	.83
727	Fayetteville	.84
728	Russellville	.84
729	Fort Smith	.85
CALIFORNIA		
900-902	Los Angeles	1.16
903-905	Inglewood	1.15
906-908	Long Beach	1.15
910-912	Pasadena	1.14
913-916	Van Nuys	1.17
917-918	Alhambra	1.16
919-921	San Diego	1.13
922	Palm Springs	1.14
923-924	San Bernardino	1.15
925	Riverside	1.15
926-927	Santa Ana	1.16
928	Anaheim	1.15
930	Oxnard	1.15
931	Santa Barbara	1.15
932-933	Bakersfield	1.15
934	San Luis Obispo	1.16
935	Mojave	1.15
936-938	Fresno	1.21
939	Salinas	1.25
940-941	San Francisco	1.30
942,956-958	Sacramento	1.22
943	Palo Alto	1.28
944	San Mateo	1.29
945	Vallejo	1.26
946	Oakland	1.28
947	Berkeley	1.30
948	Richmond	1.27
949	San Rafael	1.30
950	Santa Cruz	1.24
951	San Jose	1.28
952	Stockton	1.21
953	Modesto	1.19

STATE	CITY	Residential
CALIFORNIA (CONT'D)		
954	Santa Rosa	1.27
955	Eureka	1.24
959	Marysville	1.21
960	Redding	1.22
961	Susanville	1.20
COLORADO		
800-802	Denver	.91
803	Boulder	.91
804	Golden	.90
805	Fort Collins	.91
806	Greeley	.91
807	Fort Morgan	.91
808-809	Colorado Springs	.90
810	Pueblo	.89
811	Alamosa	.88
812	Salida	.90
813	Durango	.89
814	Montrose	.88
815	Grand Junction	.91
816	Glenwood Springs	.90
CONNECTICUT		
060	New Britain	1.10
061	Hartford	1.10
062	Willimantic	1.09
063	New London	1.08
064	Meriden	1.09
065	New Haven	1.09
066	Bridgeport	1.10
067	Waterbury	1.09
068	Norwalk	1.09
069	Stamford	1.09
D.C.		
200-205	Washington	.94
DELAWARE		
197	Newark	1.03
198	Wilmington	1.04
199	Dover	1.04
FLORIDA		
320,322	Jacksonville	.89
321	Daytona Beach	.89
323	Tallahassee	.89
324	Panama City	.86
325	Pensacola	.87
326,344	Gainesville	.88
327-328,347	Orlando	.89
329	Melbourne	.89
330-332,340	Miami	.87
333	Fort Lauderdale	.86
334,349	West Palm Beach	.86
335-336,346	Tampa	.86
337	St. Petersburg	.86
338	Lakeland	.84
339,341	Fort Myers	.85
342	Sarasota	.87
GEORGIA		
300-303,399	Atlanta	.92
304	Statesboro	.88
305	Gainesville	.86
306	Athens	.88
307	Dalton	.89
308-309	Augusta	.90
310-312	Macon	.91
313-314	Savannah	.91
315	Waycross	.88
316	Valdosta	.91
317,398	Albany	.90
318-319	Columbus	.91
HAWAII		
967	Hilo	1.13
968	Honolulu	1.14

Location Factors - Residential

STATE	CITY	Residential
STATES & POSS.		
969	Guam	.92
IDAHO		
832	Pocatello	.94
833	Twin Falls	.93
834	Idaho Falls	.90
835	Lewiston	.96
836-837	Boise	.94
838	Coeur d'Alene	.94
ILLINOIS		
600-603	North Suburban	1.20
604	Joliet	1.21
605	South Suburban	1.20
606-608	Chicago	1.21
609	Kankakee	1.13
610-611	Rockford	1.12
612	Rock Island	1.00
613	La Salle	1.10
614	Galesburg	1.02
615-616	Peoria	1.04
617	Bloomington	1.04
618-619	Champaign	1.02
620-622	East St. Louis	1.02
623	Quincy	1.02
624	Effingham	1.04
625	Decatur	1.02
626-627	Springfield	1.03
628	Centralia	1.02
629	Carbondale	1.00
INDIANA		
460	Anderson	.93
461-462	Indianapolis	.93
463-464	Gary	1.02
465-466	South Bend	.91
467-468	Fort Wayne	.92
469	Kokomo	.90
470	Lawrenceburg	.90
471	New Albany	.89
472	Columbus	.92
473	Muncie	.93
474	Bloomington	.92
475	Washington	.92
476-477	Evansville	.91
478	Terre Haute	.91
479	Lafayette	.92
IOWA		
500-503,509	Des Moines	.94
504	Mason City	.89
505	Fort Dodge	.90
506-507	Waterloo	.89
508	Creston	.93
510-511	Sioux City	.91
512	Sibley	.82
513	Spencer	.83
514	Carroll	.93
515	Council Bluffs	.91
516	Shenandoah	.90
520	Dubuque	.92
521	Decorah	.90
522-524	Cedar Rapids	.94
525	Ottumwa	.96
526	Burlington	.96
527-528	Davenport	.98
KANSAS		
660-662	Kansas City	.96
664-666	Topeka	.87
667	Fort Scott	.89
668	Emporia	.85
669	Belleville	.82
670-672	Wichita	.82
673	Independence	.87
674	Salina	.83
675	Hutchinson	.82
676	Hays	.84
677	Colby	.86
678	Dodge City	.84
679	Liberal	.82
KENTUCKY		
400-402	Louisville	.92
403-405	Lexington	.92

STATE	CITY	Residential
KENTUCKY (CONT'D)		
406	Frankfort	.92
407-409	Corbin	.88
410	Covington	.88
411-412	Ashland	.91
413-414	Campton	.88
415-416	Pikeville	.91
417-418	Hazard	.88
420	Paducah	.91
421-422	Bowling Green	.91
423	Owensboro	.91
424	Henderson	.93
425-426	Somerset	.88
427	Elizabethtown	.88
LOUISIANA		
700-701	New Orleans	.86
703	Thibodaux	.85
704	Hammond	.84
705	Lafayette	.86
706	Lake Charles	.87
707-708	Baton Rouge	.87
710-711	Shreveport	.87
712	Monroe	.84
713-714	Alexandria	.84
MAINE		
039	Kittery	.94
040-041	Portland	.98
042	Lewiston	.96
043	Augusta	.95
044	Bangor	.94
045	Bath	.94
046	Machias	.94
047	Houlton	.95
048	Rockland	.94
049	Waterville	.96
MARYLAND		
206	Waldorf	.91
207-208	College Park	.91
209	Silver Spring	.90
210-212	Baltimore	.95
214	Annapolis	.94
215	Cumberland	.93
216	Easton	.90
217	Hagerstown	.96
218	Salisbury	.91
219	Elkton	.95
MASSACHUSETTS		
010-011	Springfield	1.06
012	Pittsfield	1.04
013	Greenfield	1.02
014	Fitchburg	1.08
015-016	Worcester	1.08
017	Frammingham	1.09
018	Lowell	1.10
019	Lawrence	1.11
020-022, 024	Boston	1.17
023	Brockton	1.09
025	Buzzards Bay	1.08
026	Hyannis	1.10
027	New Bedford	1.09
MICHIGAN		
480,483	Royal Oak	.94
481	Ann Arbor	.96
482	Detroit	1.00
484-485	Flint	.93
486	Saginaw	.91
487	Bay City	.91
488-489	Lansing	.93
490	Battle Creek	.90
491	Kalamazoo	.90
492	Jackson	.92
493,495	Grand Rapids	.91
494	Muskegon	.90
496	Traverse City	.89
497	Gaylord	.89
498-499	Iron Mountain	.90
MINNESOTA		
550-551	Saint Paul	1.09
553-555	Minneapolis	1.10
556-558	Duluth	1.04

Location Factors - Residential

STATE	CITY	Residential
MINNESOTA (CONT'd)		
559	Rochester	1.02
560	Mankato	1.03
561	Windom	.99
562	Willmar	1.01
563	St. Cloud	1.07
564	Brainerd	1.00
565	Detroit Lakes	1.00
566	Bemidji	.99
567	Thief River Falls	.99
MISSISSIPPI		
386	Clarksdale	.83
387	Greenville	.86
388	Tupelo	.84
389	Greenwood	.84
390-392	Jackson	.85
393	Meridian	.84
394	Laurel	.83
395	Biloxi	.84
396	McComb	.82
397	Columbus	.82
MISSOURI		
630-631	St. Louis	.99
633	Bowling Green	.96
634	Hannibal	.94
635	Kirksville	.91
636	Flat River	.95
637	Cape Girardeau	.92
638	Sikeston	.91
639	Poplar Bluff	.91
640-641	Kansas City	.98
644-645	St. Joseph	.96
646	Chillicothe	.93
647	Harrisonville	.96
648	Joplin	.91
650-651	Jefferson City	.91
652	Columbia	.92
653	Sedalia	.93
654-655	Rolla	.93
656-658	Springfield	.94
MONTANA		
590-591	Billings	.93
592	Wolf Point	.91
593	Miles City	.92
594	Great Falls	.92
595	Havre	.87
596	Helena	.90
597	Butte	.90
598	Missoula	.90
599	Kalispell	.90
NEBRASKA		
680-681	Omaha	.90
683-685	Lincoln	.91
686	Columbus	.90
687	Norfolk	.90
688	Grand Island	.91
689	Hastings	.90
690	McCook	.86
691	North Platte	.90
692	Valentine	.88
693	Alliance	.85
NEVADA		
889-891	Las Vegas	1.06
893	Ely	.96
894-895	Reno	.98
897	Carson City	.98
898	Elko	.95
NEW HAMPSHIRE		
030	Nashua	.99
031	Manchester	1.01
032-033	Concord	.99
034	Keene	.97
035	Littleton	.95
036	Charleston	.97
037	Claremont	.97
038	Portsmouth	.99

STATE	CITY	Residential
NEW JERSEY		
070-071	Newark	1.18
072	Elizabeth	1.18
073	Jersey City	1.17
074-075	Paterson	1.17
076	Hackensack	1.16
077	Long Branch	1.16
078	Dover	1.16
079	Summit	1.17
080,083	Vineland	1.16
081	Camden	1.18
082,084	Atlantic City	1.18
085-086	Trenton	1.17
087	Point Pleasant	1.16
088-089	New Brunswick	1.19
NEW MEXICO		
870-872	Albuquerque	.88
873	Gallup	.88
874	Farmington	.89
875	Santa Fe	.88
877	Las Vegas	.88
878	Socorro	.88
879	Truth/Consequences	.88
880	Las Cruces	.88
881	Clovis	.88
882	Roswell	.88
883	Carrizozo	.88
884	Tucumcari	.88
NEW YORK		
100-102	New York	1.28
103	Staten Island	1.26
104	Bronx	1.26
105	Mount Vernon	1.13
106	White Plains	1.17
107	Yonkers	1.17
108	New Rochelle	1.22
109	Suffern	1.19
110	Queens	1.28
111	Long Island City	1.30
112	Brooklyn	1.30
113	Flushing	1.29
114	Jamaica	1.29
115,117,118	Hicksville	1.20
116	Far Rockaway	1.29
119	Riverhead	1.21
120-122	Albany	1.04
123	Schenectady	1.05
124	Kingston	1.16
125-126	Poughkeepsie	1.21
127	Monticello	1.14
128	Glens Falls	1.02
129	Plattsburgh	1.00
130-132	Syracuse	1.01
133-135	Utica	1.00
136	Watertown	.99
137-139	Binghamton	.99
140-142	Buffalo	1.04
143	Niagara Falls	1.05
144-146	Rochester	1.01
147	Jamestown	.98
148-149	Elmira	.98
NORTH CAROLINA		
270,272-274	Greensboro	1.00
271	Winston-Salem	.99
275-276	Raleigh	.99
277	Durham	1.00
278	Rocky Mount	.98
279	Elizabeth City	.98
280	Gastonia	1.03
281-282	Charlotte	1.01
283	Fayetteville	.99
284	Wilmington	1.01
285	Kinston	.98
286	Hickory	.99
287-288	Asheville	1.01
289	Murphy	1.02
NORTH DAKOTA		
580-581	Fargo	.89
582	Grand Forks	.91
583	Devils Lake	.91
584	Jamestown	.89
585	Bismarck	.90

Location Factors - Residential

STATE	CITY	Residential
NORTH DAKOTA (CONT'D)		
586	Dickinson	.89
587	Minot	.90
588	Williston	.90
OHIO		
430-432	Columbus	.93
433	Marion	.91
434-436	Toledo	.95
437-438	Zanesville	.90
439	Steubenville	.92
440	Lorain	.92
441	Cleveland	.95
442-443	Akron	.93
444-445	Youngstown	.93
446-447	Canton	.92
448-449	Mansfield	.92
450	Hamilton	.91
451-452	Cincinnati	.89
453-454	Dayton	.92
455	Springfield	.91
456	Chillicothe	.94
457	Athens	.94
458	Lima	.92
OKLAHOMA		
730-731	Oklahoma City	.88
734	Ardmore	.85
735	Lawton	.86
736	Clinton	.85
737	Enid	.85
738	Woodward	.84
739	Guymon	.86
740-741	Tulsa	.88
743	Miami	.88
744	Muskogee	.86
745	McAlester	.87
746	Ponca City	.87
747	Durant	.88
748	Shawnee	.87
749	Poteau	.87
OREGON		
970-972	Portland	1.06
973	Salem	1.04
974	Eugene	1.04
975	Medford	1.03
976	Klamath Falls	1.03
977	Bend	1.05
978	Pendleton	1.03
979	Vale	1.00
PENNSYLVANIA		
150-152	Pittsburgh	1.01
153	Washington	.99
154	Uniontown	.98
155	Bedford	.97
156	Greensburg	.99
157	Indiana	.97
158	Dubois	.96
159	Johnstown	.97
160	Butler	.99
161	New Castle	.98
162	Kittanning	1.00
163	Oil City	.96
164-165	Erie	.98
166	Altoona	.98
167	Bradford	.95
168	State College	.97
169	Wellsboro	.96
170-171	Harrisburg	.99
172	Chambersburg	.98
173-174	York	.97
175-176	Lancaster	.98
177	Williamsport	.95
178	Sunbury	.97
179	Pottsville	.97
180	Lehigh Valley	1.03
181	Allentown	1.04
182	Hazleton	.98
183	Stroudsburg	.98
184-185	Scranton	.98
186-187	Wilkes-Barre	.96
188	Montrose	.99
189	Doylestown	1.11

STATE	CITY	Residential
PENNSYLVANIA (CONT'D)		
190-191	Philadelphia	1.16
193	Westchester	1.09
194	Norristown	1.09
195-196	Reading	.99
PUERTO RICO		
009	San Juan	.79
RHODE ISLAND		
028	Newport	1.07
029	Providence	1.07
SOUTH CAROLINA		
290-292	Columbia	1.02
293	Spartanburg	1.01
294	Charleston	1.02
295	Florence	1.01
296	Greenville	1.01
297	Rock Hill	.99
298	Aiken	1.02
299	Beaufort	1.01
SOUTH DAKOTA		
570-571	Sioux Falls	.92
572	Watertown	.89
573	Mitchell	.83
574	Aberdeen	.88
575	Pierre	.92
576	Mobridge	.83
577	Rapid City	.88
TENNESSEE		
370-372	Nashville	.90
373-374	Chattanooga	.87
375,380-381	Memphis	.89
376	Johnson City	.85
377-379	Knoxville	.87
382	McKenzie	.79
383	Jackson	.87
384	Columbia	.84
385	Cookeville	.79
TEXAS		
750	McKinney	.82
751	Waxahachie	.83
752-753	Dallas	.86
754	Greenville	.83
755	Texarkana	.84
756	Longview	.84
757	Tyler	.84
758	Palestine	.83
759	Lufkin	.82
760-761	Fort Worth	.84
762	Denton	.85
763	Wichita Falls	.86
764	Eastland	.85
765	Temple	.83
766-767	Waco	.85
768	Brownwood	.84
769	San Angelo	.83
770-772	Houston	.82
773	Huntsville	.82
774	Wharton	.82
775	Galveston	.80
776-777	Beaumont	.82
778	Bryan	.82
779	Victoria	.80
780	Laredo	.83
781-782	San Antonio	.84
783-784	Corpus Christi	.81
785	McAllen	.84
786-787	Austin	.83
788	Del Rio	.82
789	Giddings	.82
790-791	Amarillo	.85
792	Childress	.85
793-794	Lubbock	.85
795-796	Abilene	.83
797	Midland	.87
798-799,885	El Paso	.85
UTAH		
840-841	Salt Lake City	.91
842,844	Ogden	.91
843	Logan	.90

Location Factors - Residential

STATE	CITY	Residential
UTAH (CONT'D)		
845	Price	.91
846-847	Provo	.90
VERMONT		
050	White River Jct.	.97
051	Bellows Falls	1.02
052	Bennington	1.01
053	Brattleboro	1.02
054	Burlington	.95
056	Montpelier	1.01
057	Rutland	.94
058	St. Johnsbury	.99
059	Guildhall	.98
VIRGINIA		
220-221	Fairfax	1.03
222	Arlington	1.04
223	Alexandria	1.10
224-225	Fredericksburg	1.09
226	Winchester	1.07
227	Culpeper	1.06
228	Harrisonburg	1.01
229	Charlottesville	.98
230-232	Richmond	.99
233-235	Norfolk	.99
236	Newport News	.99
237	Portsmouth	.99
238	Petersburg	.99
239	Farmville	.98
240-241	Roanoke	1.00
242	Bristol	.97
243	Pulaski	.96
244	Staunton	.95
245	Lynchburg	.98
246	Grundy	.96
WASHINGTON		
980-981,987	Seattle	1.07
982	Everett	1.06
983-984	Tacoma	1.05
985	Olympia	1.05
986	Vancouver	1.05
988	Wenatchee	1.01
989	Yakima	1.03
990-992	Spokane	.96
993	Richland	.97
994	Clarkston	.94
WEST VIRGINIA		
247-248	Bluefield	.94
249	Lewisburg	.94
250-253	Charleston	.95
254	Martinsburg	.92
255-257	Huntington	.96
258-259	Beckley	.95
260	Wheeling	.95
261	Parkersburg	.93
262	Buckhannon	.94
263-264	Clarksburg	.93
265	Morgantown	.94
266	Gassaway	.94
267	Romney	.94
268	Petersburg	.95
WISCONSIN		
530,532	Milwaukee	1.03
531	Kenosha	1.04
534	Racine	1.04
535	Beloit	1.00
537	Madison	1.01
538	Lancaster	.98
539	Portage	.97
540	New Richmond	.99
541-543	Green Bay	.99
544	Wausau	.98
545	Rhineland	.97
546	La Crosse	.98
547	Eau Claire	.99
548	Superior	1.01
549	Oshkosh	.97
WYOMING		
820	Cheyenne	.89
821	Yellowstone Nat. Pk.	.86
822	Wheatland	.85

STATE	CITY	Residential
WYOMING (CONT'D)		
823	Rawlins	.86
824	Worland	.86
825	Riverton	.85
826	Casper	.87
827	Newcastle	.86
828	Sheridan	.89
829-831	Rock Springs	.89
CANADIAN FACTORS (reflect Canadian currency)		
ALBERTA		
	Calgary	1.07
	Edmonton	1.07
	Fort McMurray	1.06
	Lethbridge	1.03
	Lloydminster	.95
	Medicine Hat	.99
	Red Deer	.99
BRITISH COLUMBIA		
	Kamloops	.99
	Prince George	.98
	Vancouver	1.07
	Victoria	1.02
MANITOBA		
	Brandon	1.02
	Portage la Prairie	.94
	Winnipeg	.97
NEW BRUNSWICK		
	Bathurst	.91
	Dalhousie	.92
	Fredericton	.97
	Moncton	.93
	Newcastle	.90
	St. John	.99
NEWFOUNDLAND		
	Corner Brook	1.01
	St. Johns	1.04
NORTHWEST TERRITORIES		
	Yellowknife	1.07
NOVA SCOTIA		
	Bridgewater	.93
	Dartmouth	.98
	Halifax	1.00
	New Glasgow	.97
	Sydney	.96
	Truro	.93
	Yarmouth	.97
ONTARIO		
	Barrie	1.04
	Brantford	1.04
	Cornwall	.99
	Hamilton	1.05
	Kingston	.99
	Kitchener	1.05
	London	1.04
	North Bay	1.09
	Oshawa	1.07
	Ottawa	1.06
	Owen Sound	1.03
	Peterborough	1.02
	Sarnia	1.04
	Sault Ste. Marie	1.01
	St. Catharines	1.05
	Sudbury	1.01
	Thunder Bay	1.04
	Timmins	1.01
	Toronto	1.08
	Windsor	1.04
PRINCE EDWARD ISLAND		
	Charlottetown	.92
	Summerside	.91
QUEBEC		
	Cap-de-la-Madeleine	.99
	Charlesbourg	.99
	Chicoutimi	1.07
	Gatineau	.99
	Granby	1.04

Location Factors - Residential

STATE	CITY	Residential
QUEBEC (CONTD)	Hull	1.04
	Joliette	1.05
	Laval	.99
	Montreal	1.01
	Quebec City	1.02
	Rimouski	1.08
	Rouyn-Noranda	1.04
	Saint-Hyacinthe	1.04
	Sherbrooke	.99
	Sorel	1.05
	Saint-Jerome	1.04
	Trois-Rivieres	1.13
SASKATCHEWAN	Moose Jaw	.95
	Prince Albert	.95
	Regina	1.05
	Saskatoon	1.02
YUKON		
	Whitehorse	1.00

Abbreviations

A	Area
ASTM	American Society for Testing and Materials
B.F.	Board feet
Carp.	Carpenter
C.F.	Cubic feet
CWJ	Composite wood joist
C.Y.	Cubic yard
Ea.	Each
Equip.	Equipment
Exp.	Exposure
Ext.	Exterior
F	Fahrenheit
Ft.	Foot, feet
Gal.	Gallon
Hr.	Hour
in.	Inch, inches
Inst.	Installation
Int.	Interior
Lb.	Pound
L.F.	Linear feet
LVL	Laminated veneer lumber
Mat.	Material
Max.	Maximum
MBF	Thousand board feet
MBM	Thousand feet board measure
MSF	Thousand square feet
Min.	Minimum
O.C.	On center
O&P	Overhead and profit
OWJ	Open web wood joist
Oz.	Ounce
Pr.	Pair
Quan.	Quantity
S.F.	Square foot
Sq.	Square, 100 square feet
S.Y.	Square yard
V.L.F.	Vertical linear feet
'	Foot, feet
"	Inch, inches
o	Degrees

A

A/C junction box	163
junction box furnace unit	156
junction box heat pump	157
Accessories bathtub	256
fireplace	131
shower	257
wallboard	179
Accordion type bifold door	198
Acoustical ceiling	187
Acrylic impregnated parquet floor	242
Add for additional story	74
for steep pitch	74
Adhesive tile acoustical ceiling	189
Adobe paver	140
Air compressor	4
conditioning	159
handler	161
mover	11
purifier-per day	12
vent system negative	13
Airless sprayer	13
Allowance to repair	166
Aluminum awning standard	287
carport	290
downspouts	285
fascia	67
flashing	71
gutters	284
screen door	101
sheet	81
siding	133
sliding patio door	99
soffit	69
storage shed	290
valley flashing	72
window	106
Analysis asbestos	12
Anodized curtain wall	122
Antenna television	271
Architectural fees	1
shingles	73
Asbestos analysis	12
ceiling encapsulate	12
pipe insulation	12
removal	12
test	1
Asbestos-based plaster	12
siding	12
Asphalt paving	139
roofing	87
Average grade carpeting	247
room	6
Awning	287
sash aluminum window	110

B

Back bar	228
Backfill	17
trenching	17
Bannister stair	209
Bar back	228
joist	45
liquor	228
sink	253, 254
towel	282
Barge rafter fascia	68
Base cabinets	222
molding	201
pad chimney	129
Baseboard carpet	204
electric	158

hot water	153
Bath accessories	282
Bathroom dispenser	282
exhaust fan	268
partition	283
Bathtub	255
Batt unfaced	167, 169, 171
Bay aluminum window	111
Beam / girder	27
collar	52
hardware	44
Beams glue-laminated	42
Bench seating gazebo	291
seating porch	63
seating wood deck	57
Berber carpeting	247, 248
Bidet	251
Bifold door	196
Blinds treatment	273
Block bridge	31
fencing	140
Blown acoustical ceiling	190
insulation	169, 171
Board and batten siding	136
ledger	52
rigid	168, 170-172
Boards ledger	32, 49
Bobcat	4
Boiler	156
Bookcase built-in	229
custom	207
Border wallcovering	186
Bowstring truss	55
Box fire	130
Bracing let-in	36
Breast (face) brick fireplace	130
Brick paver deluxe	140
paver standard	140
structural	126
veneer	126
wall	14
Bridge block	31
Bucket concrete	5
Building concrete	9
demolition	9
masonry	9
steel	9
wood-framed	9
Built-in bookcase	229
desk	229
Built-up roofing	87
roofing components	88
Bullet resistant window	120
Butcher block countertop	230
Bypass sliding door	200

C

Cabinet garage base	229
hardwood base	226
hardwood tall	218
hardwood vanity	233
hardwood wall	215
island base	227
laminated base	222
laminated tall	218
laminated vanity	231
laminated wall	211
medicine	217
stain	221, 229
strip refinish	218, 221, 229, 234
unit heater	154
wall garage	218
wall mounted microwave	278
wood base	223, 224

wood tall	218
wood vanity	231, 232
wood wall	212, 214
Canopy cover cloth	288
Cant strips	85
Canvas awning	287
Cap chimney metal	129
vent	147
Carpenter	2
Carpet baseboard	204
cleaning	11
pad	249
pad per s.f.	248
stair	249
treatment	11
Carpeting	246, 247
average grade	247
berber	247, 248
economy grade	247
indoor-outdoor	246, 247
per s.f.	246
premium grade	247
wool	246, 248
Carport aluminum	290
Cased opening double	205
opening single	205
Casement bow wood window	117
wood window	116
Casing double window	206
single window	205
trim	91, 93, 96, 194, 198, 201
triple window	206
window	206
Cast iron bathtub	255
Caulk renail base molding	204
CDX plywood	45
Cedar column or post	57
fascia	67
railing and trim	60
shake	75
soffit	69
wood shingles	75
Ceiling acoustical	187
acoustical scrape	12
asbestos seal	13
clean	10
clean seal	237
earthquake strapping	49
framing	47
grid type lighting	267
insulation	170
lath	177
light fixture	264
paddle fan	268
paint	237
plaster	176
porch	63
prep	236
recessed lighting	267
sand	236
seal	236
texture	236
Ceramic tile countertop	230
tile cove base	204
tile flooring	243
wall tile	180
Chain link fencing	142
Chair rail molding	204
Chemical toilet	3
Cherry parquet floor	241
Chest-type freezer	281
Chimes door bell	270
Chimney	129
base pad	129
install	129
install from roof up	129

Circuits	261
Clay tile roofing	77
Clean ceiling	10
fixtures steam	11
seal ceiling	237
seal wall	236
wall	10, 235
wax floor	241
wax parquet	242
wax vinyl	245
Cleaning carpet	11
maintenance	128
Clean-up final	293
initial	8
progressive	8
Clear glass	120
plate glass	121
Clips hurricane	36, 49
Closet shelf and rod	207
shelving	207
Cloth canopy cover	288
Clothing rod	208
CMU reinforced	125
unreinforced	125
Coat seal	139
Collar beam	52
Column	29
concrete	29
or post cedar	57
or post redwood	58
or post treated	57
Commercial elevator	275
grade door	94
light fixture	266
metal door	104
trusses	55
Commode	251
Common brick fireplace	129
Compactor trash	281
Complete panel electrical	165
Components	96
built-up roofing	88
plumbing	147
Composite decking	61
Composition shingles	73
Compressor air	4
air conditioning	159
Concealed sprinkler system	163
Concrete bucket	5
building	9
column	29
footing	24
footing continuous	24
masonry wall	14
mixer	4
pad	163
paver natural	139
piles precast	20
pump	5
slab	14, 25
slab lightweight	25
slab reinforced	25
slab unreinforced	25
steps	275
tile roofing	80
Condensing unit air	
conditioning	160
Construction clean-up	8, 293
fees	1
permits	1
Container storage	3
Contents store	6
Continuous concrete footing	24
Cooler evaporative	161
Coping wall cap	72
Copper downspouts	285

flashing	72
gutters	284
roofing	84
Cork wall tile	181
Corner molding	205
Corrugated aluminum sheet	81
galvanized steel	83
Countertop	229
microwave	278
Course wearing	139
Cove molding	205
Cover and protect	6
for outlet / switch	264
outlet/switch	264
Cross bracing piles	21
Cross-bracing foundation post	23
Crown molding	205
CSPE type roofing	86
Cultured marble countertop	230
marble vanity top	234
Cupolas	289
Curtain wall anodized	122
wall system	122
Custom bookcase	207

D

Debris hauling	7
remove	10
Decking composite	61
fir	61
mahogany	62
PVC	62
treated	61
Decontamination unit	13
Dehumidifier	11
Deluxe brick paver	140
Demo haul exterior chimney	129
haul interior chimney	129
Deodorize disinfect	10
Designer floor mount toilet	251
wallcovering	186
Desk built-in	229
Detector smoke	269
Diffuser	259
Dimmer switch	263
Disappearing stair	208
Dish soap	282
Dishwasher	281
Disinfect deodorize	10
Dispenser bathroom	282
Disposal garbage	281
Dome skylight	123
Door accordion type bifold	198
aluminum screen	101
aluminum sliding patio	99
bell chimes	270
bifold louvered	197
bifold mirrored	197
bifold wood	196
commercial grade	94
entry	89
exterior	93
French style	90
full louver	199
half louver	199
hardware	96, 194
hardware metal	105
hollow core	193
insulated storm	102
jamb	90, 195, 198, 199, 201
metal garage	102
mirrored bypass sliding	200
roll up garage	103
rough-in	38

shave refit	101, 195, 198, 200, 201
sliding screen patio	101
solid core	95
stain bifold	198
stain bypass sliding	201
stain louver	200
steel	92
storm	102
vinyl sliding patio	100
wood bypass sliding	200
wood framed sliding patio	100
wood screen	101
Double cased opening	205
hung aluminum window	108
hung vinyl window	113
hung wood window	114
oven range	278
porcelain sink	252, 254
stainless steel sink	252, 254
switch	262
wall oven	277
Douglas fir soffit	70
Downspouts	284
Drain sink basket	255
Drapery treatment	273
Drip edge	72
Dryer	278
washer	279
Drywall	2
Ductwork	150, 258
Dump fees	7
truck	3
Dumpster load	7
rental	7

E

Earthquake strapping ceiling	49
strapping floor	33
strapping wall	36
Economy grade carpeting	247
Edge drip	72
Elastomeric roofing	85
Electric baseboard	158
forced air furnace unit	156
opener	104
water heater	148
Electrical per s.f.	165, 261
Electrician	2
Elevator	275
Emergency lighting	268
repairs roofing	87
service call	10
Encapsulate asbestos ceiling	12
Enclosure pool screen	291
End gable	54
wall	72
Engineered lumber joist	31
lumber truss / joist	55
Engineering fees	1
Entrance storefront	122
Entry door	89
EPDM type roofing	86
Epoxy inject	26
Equipment rental	3
Etched glass window	120
Evaporative cooler	161
Excavation	17
footing	17
Exhaust fan bathroom	268
fan kitchen	269
fan whole-house	269
Exposed sprinkler system	163
Exterior door	93
insulation	172

light fixture	265
OSB	46
sheathing	45
shutters	285
siding	133
trim	65, 66, 133
trim PVC	66
type door	89
vapor barrier	46, 172
Extinguisher fire	283
Extra large room	6
Extraction water	10

F

Faced batt foil	167, 169, 170
batt kraft	167, 168, 170
Fan	268
Fascia	67
aluminum	67
barge rafter	68
cedar	67
hem-fir	68
plywood	67
redwood	67
vinyl	67
Faucet sink	255
Fees architectural	1
dump	7
engineering	1
Felt underlay	34
Fencing	140
chain link	142
gate	144
picket	143
post	144
red cedar	143
redwood	143
shadowbox	143
temporary	3
wrought iron	144
Fiber cement siding	135
Fiberglass bathtub	255
ductwork	151
insulation	172
sheet	83
shingles	73
shower	257
Filter system pool	292
Final clean-up	293
Finish plywood	46
Finished wallboard	177
Fir decking	61
Fire box	130
extinguisher	283
prevention / protection	283
Fireblock	35
Fireplace	129
accessories	131
breast (face) brick	130
common brick	129
hearth	130
natural stone	130
prefabricated	130
Fixed skylight	123
Flashing aluminum	71
aluminum valley	72
copper	72
galvanized	71
Flat clay tile roofing	77
Flatbed truck	3
Flood clean-up	10
Floor acrylic impregnated	
parquet	242
asbestos seal	13

ceramic tile	243
cherry parquet	241
clean wax	241
earthquake strapping	33
framing system	29
gas-fired furnace unit	155
granite	244
insulation	167
maple	239
marble	243
mounted w/tank toilet	251
oak	239
oak parquet	241
pine	240
prefinished oak	240
protect/cover	6, 235, 236
refinish existing	240
sand finish new	240
sink	253, 254
slate	244
teak parquet	242
terrazzo	244
thick set paver	243
tile	243
underlayment	241
urethane coat	241
vapor barrier	168
vinyl sheet	245
walnut	240
walnut parquet	242
Fluorescent light fixture	265, 266
Fly rafter	53
Foam rubber pad	248, 249
Fog area thermal	11
Foil faced batt	167, 169, 170
wallcovering	186
Footing excavation	17
Forced air furnace unit electric	156
air furnace unit gas	155
Forklift	4
Foundation post	23
post cross-bracing	23
post wood	23
vent	289
Framing ceiling	47
roof	49
system floor	29
wall	34
Free standing oven	277
Freezer	280
chest-type	281
French style door	90
Frieze	289
Full louver door	199
Furnace unit	154
Furring	128
strips	179, 183, 190

G

Gable end	54
louvered vent	289
Galvanized downspouts	284
ductwork	150
flashing	71
gutters	284
steel	83
Garage base cabinet	229
cabinet wall	218
door	102
Garbage disposal	281
Gas forced air furnace unit	155
Gas-fired boiler	156
furnace unit floor	155
furnace unit wall	154

Gas-fired water heater	149
Gate fencing	144
Gazebo	291
General clean-up	10
laborer	2
Generator	5
Girder treated	58
Glass block wall tile	181
clear	120
curtain wall	122
shelving	207
window	119
window etched	120
window insulated	119
window obscure/Florentine	119
window stained	120
window tempered	120
window tinted	119
window wired	120
Glue-laminated beams	42
Grab rail	282
Grading	139
hand	139
machine	139
Granite floor	244
Grasscloth string wallcovering	186
Gravel stop	72
Grid acoustical ceiling t-bar	188
type lighting ceiling	267
Grill return	258
supply	259
GRM membrane roofing	85
Gunite	26
Gutters	284
Gypsum wallboard	177

H

Half louver door	199
Hand backfill	17
grading	139
Handler air	161
Handrail and baluster PVC	62
stair	209
Hard tile flooring	243
Hardboard wall paneling	182
Hardware aluminum window	113
beam	44
door	96, 194
metal door	105
truss	55
Hardwood base cabinet	226
oak	207
stair spiral	208
stair straight	208
tall cabinet	218
vanity cabinet	233
wall cabinet	215
Haul exterior chimney demo	129
interior chimney demo	129
Hauling debris	7
Headers wall	37
Hearth fireplace	130
Heat pump	157
Heater cabinet unit	154
cap water	289
space	6
Heater/motor pool	292
Heating	153, 154, 158
control	159
Hem-fir fascia	68
HEPA vacuum cleaner	13
Holder toothbrush	282
Hole in gyp. wallboard patch	179
Hollow core door	191

Hot water baseboard	153
water system solar	150
Hurricane clips	36, 49

I

Ice maker	280
Impregnated walk	88
Indoor-outdoor carpeting	246, 247
Industrial steel window	124
Initial clean-up	8
Inject epoxy	26
Install chimney	129
from roof up chimney	129
Institutional bathtub	256
Insulated glass window	119
storm door	102
Insulating wrap water heater	150
Insulation blown	169, 171
fiberglass	172
perlite	173
polystyrene	173
urethane	174
Intercom system	270
Interior ceiling plaster	176
wall plaster	175
wood shutters	286
Island base cabinet	227
I-type steel	28

J

Jack and relevel	7
relevel	7
roof	74
with wiring phone	262
Jackhammer	4
Jamb door	90, 195, 198, 199, 201
metal	105
Job permit	1
Joist bar	45
treated	59
Junction box A/C	163
box furnace unit A/C	156
box heat pump A/C	157
Jute carpet pad	249

K

Kitchen exhaust fan	269
Kitchenette unit	281
Kraft faced batt	167, 168, 170

L

Laborer general	2
Laminated base cabinet	222
countertop	229
safety window	119
tall cabinet	218
vanity cabinet	231
vanity top	234
wall cabinet	211
Large room	6
room extra	6
Lath ceiling	177
wall	176
Laundry sink	253
Lavatory sink vanity	253, 254
Ledger board	52
boards	32, 49
strips	32, 48
treated	59

Let-in bracing	36
Light fixture ceiling	264
fixture exterior	265
fixture fluorescent	265, 266
stand	13
switch	262
Lighting emergency	268
track	266, 268
Lightweight concrete slab	25
Liquor bar	228
Load dumpster	7
Lookout rafter	53
Louver door	199
Louvered door bifold	197
vent gable	289
Low voltage systems	269
Lumber joist engineered	31
stock	65, 66
truss / joist engineered	55

M

Machine backfill	17
grading	139
Mahogany decking	62
Main service	165
Maintenance cleaning	128
plumbing	147
Maker ice	280
Maple floor	239
Marble countertop cultured	230
floor	243
vanity top cultured	234
wall tile	181
window sill	206
Marlite	182
Mason	2
Masonite door pre-hung	192
Masonry building	9
pavers	139
wall	125
wall concrete	14
Masthead	166
Medicine cabinet	217
Metal cap chimney	129
door	92
flashing	71
garage door	102
jamb	105
joist	45
pipe piles	21
stairs	275
stud framing	44
support posts carport	290
Microwave cabinet wall	
mounted	278
countertop	278
range	278
Mildicide wall	11
Mirror wall	120
wall tile	181
Mirrored bypass sliding door	200
door bifold	197
Mission tile roofing	77
Mixer concrete	4
Modified bitumen roofing	87
Molding	183, 204
shingle	74
Motor pool pump	292
Move / reset contents	6
Mover air	11
Muck-out	10
Mural	185

N

Natural concrete paver	139
stone fireplace	130
Negative air vent system	13
Neoprene roofing	85

O

Oak base molding	202, 204
floor	239
hardwood	207
parquet floor	241
Obscure/Florentine glass wind.	119
Office trailer	3
Opener electric	104
Operable skylight	123
OSB exterior	46
roofing	56
Outlet/switch cover	264
Outriggers	53
Oven	277
cabinet tall	219
range	277

P

Pad concrete	163
foam rubber	248, 249
jute carpet	249
rebound carpet	249
urethane carpet	248, 249
waffle carpet	248, 249
Paddle fan ceiling	268
Paint / texture, ceilings	236
/ texture, walls	236
ceiling	237
preparation, ceilings	236
preparation, walls	235
scrape	26
wall	236
Painter	2
Panel acoustical ceiling tile	188
electrical complete	165
plywood	135
pool solar	292
Paper roller toilet	282
Parquet clean wax	242
Particle board shelving	207
board subflooring	34
Partition bathroom	283
Patch hole in gypsum	
wallboard	179
wall	184
Paver adobe	140
Pedestal sink	253, 254
Perlite insulation	173
Permit job	1
Phone jack with wiring	262
Picket fencing	143
Picture molding	205
wood window	118
Piles	19
cross bracing	21
metal pipe	21
steel H section	22
Pine base molding	201
floor	240
shelving	206
Pipe insulation asbestos	12
Plank board subflooring	34
roofing	56
Plaster asbestos-based	12
interior ceiling	176

interior wall	175
repairs	176, 177
thin coat ceiling	177
thin coat wall	175
Plastic downspouts	285
gutters	284
Plate glass clear	121
glass polished	121
sill	33
wall	37
Plumber	2
Plumbing	147, 148
Plywood cdx	45
fascia	67
finish	46
panel	135
roofing	56
sheathing	46
shelving	207
soffit	69
subflooring	33
wall paneling	182
Pole power	3
Polished plate glass	121
Polystyrene insulation	173
Polyvinyl chloride (PVC) roofing	85
Pool	291
Porcelain sink double	252, 254
sink single	252, 253
Porch	63
ceiling	63
privacy wall	63
re-screen	63
stair	63
Post fencing	144
sleeve PVC	62
Power pole	3
Precast concrete piles	20
Prefabricated fireplace	130
Prefinished base molding	203
oak floor	240
Pre-hung masonite door	192
steel door	104
steel-clad door	91
wood door	191, 195
Premium grade carpeting	247
Prep ceiling	236
for flooring	34
wall	235
Pressure wash sewage	11
Privacy wall porch	63
wall wood deck	57
Progressive clean-up	8
Protect/cover floor	6, 235, 236
wall	6, 235, 236
Pump concrete	5
heat	157
motor pool	292
pool water	292
sump	148
Purifier-per day air	12
Purlins	52
PVC decking	62
exterior trim	66
handrail and baluster	62
post sleeve	62

Q

Quarry tile base molding	204
tile countertop	230
Quarter round molding	204

R

Radiant wall type	159
Rafter	50
fly	53
lookout	53
Rail grab	282
Railing and trim cedar	60
and trim redwood	60
and trim treated	60
temporary	3
Range double oven	278
microwave	278
oven	277
Rangehood	276
Rangetop	276
Rebound carpet pad	249
Recessed lighting ceiling	267
Red cedar fencing	143
Redwood column or post	58
fascia	67
fencing	143
railing and trim	60
soffit	69
Refinish existing floor	240
Refrigerator	279
Re-grout tile floor	243, 244
wall tile	180, 181
Reinforced CMU	125
concrete slab	25
Relevel jack	7
Removal tree	15
Remove debris	10
Repairs plaster	176, 177
Replace slate tiles	76
Replaster pool	292
Re-screen gazebo	291
porch	63
Residential electrical	165, 261
elevator	275
light fixture	264
metal door	91
trusses	54
Return grill	258
Ribbed aluminum sheet	82
galvanized steel	84
Ridge vent	74, 289
Ridgeboard	51
Rigid board	168, 170-172
Rod clothing	208
Roll up garage door	103
Rolled roofing	73
Roof framing	49
insulation board	172
jack	74
sheathing	56
shingles	73
Roofing	2
Roofing asphalt	87
clay tile	77
copper	84
CSPE type	86
emergency repairs	87
EPDM type	86
GRM membrane	85
modified bitumen	87
neoprene	85
OSB	56
plank	56
plywood	56
polyvinyl chloride (PVC)	85
rolled	73
skip-type	56
stainless steel	84

tile	76
Room average	6
demolition	13
large	6
small	6
Rough frame stair	47
Rough-in bathtub	257
commode	252
door	38
opening	38, 40
shower	258
sink	253
sink only	254
window	40
Run wiring	268

S

Safety window laminated	119
Sand ceiling	236
finish new floor	240
wall	235
Sandblaster	5
Sanitize flush-out ductwork	260
Satellite system	271
Scaffolding	7
Scrape ceiling acoustical	12
paint	26
Screen door	101
enclosure pool	291
window	118
Seal ceiling	236
ceiling asbestos	13
coat	139
floor asbestos	13
wall	235
wall asbestos	13
Seat toilet	252
Seating gazebo bench	291
porch bench	63
wood deck bench	57
Security system	270
Selective demolition	14
Self-contained air conditioning	159
Service call emergency	10
water	3
Shadowbox fencing	143
Shake cedar	75
Shave refit door	101, 195, 198, 200, 201
Shed aluminum storage	290
wood storage	291
Sheet fiberglass	83
vinyl	245
vinyl per s.f.	245
Shelf and rod closet	207
Shelving	206
Shim support piers	6
Shingle molding	74
siding wood	136
Shingles architectural	73
fiberglass	73
Shoe base molding	203
molding	204
Shower	257
combination tub	256
Shutter wood	274
Shutters	285
Side wall	72
Siding aluminum	133
asbestos-based	12
board and batten	136
fiber cement	135

tongue and groove	135
vinyl	134
Sill marble window	206
plate	33
wood window	206
Single cased opening	205
hung window	106
porcelain sink	252, 253
stainless steel sink	252, 254
switch	262
wall oven	277
Sink (assembly)	252
faucet	255
only	253
Skip-type roofing	56
Skylight	123
Slab concrete	14
vapor barrier	26
Slabjacking	26
Slate floor	244
tile roofing	76
tiles replace	76
Sliding patio door	99
sash aluminum window	109
screen patio door	101
Slumpstone	127
veneer	130
Small room	6
Smoke detector	269
Soap dish	282
Soffit	69
aluminum	69
cedar	69
douglas fir	70
plywood	69
redwood	69
vinyl	69
Softener water	150
Solar hot water system	150
panel pool	292
Solid core door	93, 95, 195
surface countertop	230
surface vanity top	234
vinyl wallcovering	185
wood beam	27
Space heater	6
Spanish tile roofing	78
Spinner ventilator	288
Spiral hardwood stair	208
Sprayer airless	13
Springs garage door	104
Sprinkler system	163
Stain bifold door	198
bypass sliding door	201
cabinet	221, 229
louver door	200
Stained glass window	120
Stainless steel roofing	84
steel sink double	252, 254
steel sink single	252, 254
Stair assemblies	208
bannister	209
carpet	249
components	209, 249
handrail	209
porch	63
rough frame	47
wood deck	57
Stairs	47, 208, 275
metal	275
Stand light	13
Standard aluminum awning	287
brick paver	140
Standing seam	84

Stapled tile acoustical ceiling	189
Steam clean fixtures	11
Steel bathtub	255
building	9
door	92
door pre-hung	104
H section piles	22
I-type	28
window	124
window vented	124
Steel-clad door pre-hung	91
Stem wall	24
Steps concrete	275
Stock lumber	65, 66
Stop gravel	72
Storage container	3
shed	290
Store contents	6
Storefront entrance	122
system	120
Storm aluminum window	112
door	102
Straight hardwood stair	208
Strip refinish cabinet	218, 221, 229, 234
typical bathroom	13
typical kitchen	13
typical laundry	13
typical room	13
Strips cant	85
furring	179, 183, 190
ledger	32, 48
Structural brick	126
Stucco	128
siding synthetic	137
Stud framing metal	44
wall	36
Subflooring	33
particle board	34
plank board	34
plywood	33
Sump pump	148
Supply grill	259
Support piers shim	6
posts carport metal	290
wire	168
Switch dimmer	263
double	262
single	262
triple	262
Synthetic stucco siding	137
System intercom	270
satellite	271
security	270

T

Tall cabinets	218
T-bar grid acoustical ceiling	188
Teak parquet floor	242
Telephone	3
Television antenna	271
Tempered glass window	120
Temporary bracing	6
fencing	3
railing	3
utilities	3
Terrazzo floor	244
Test asbestos	1
Texture ceiling	236
wall	236
wallboard	179
Thermal fog area	11
Thermostat air conditioning	163
heat pump	157

heating control	159
Thick set paver floor	243
Thin coat ceiling plaster	177
coat wall plaster	175
Tile acoustical ceiling adhesive	189
acoustical ceiling stapled	189
floor	243
floor ceramic	243
floor re-grout	243, 244
panel acoustical ceiling	188
roofing	76
thick set wall	180
thin set wall	180
vinyl	245
Tinted glass window	119
Toilet chemical	3
designer floor mount	251
floor mounted w/tank	251
paper roller	282
seat	252
wall hung	251
Tongue and groove siding	135
Toothbrush holder	282
Towel bar	282
Track lighting	266, 268
Trade labor	2
Trailer office	3
Trash compactor	281
Treated column or post	57
decking	61
girder	58
joist	59
ledger	59
railing and trim	60
wood piles	19
Treatment blinds	273
carpet	11
drapery	273
Tree removal	15
Trenching backfill	17
Trim casing	91, 93, 96, 194, 198, 201
exterior	133
set aluminum window	113
set wood window	118
Triple switch	262
Truck dump	3
flatbed	3
Truss bowstring	55
hardware	55
w or fink	54
Tub shower combination	256
TV / cable jack w / wiring	262
Typical bathroom strip	13
kitchen strip	13
laundry strip	13
room strip	13

U

Underlay felt	34
Underlayment	73
floor	241
Unfaced batt	167, 169, 171
Unfinished wallboard	178
Unit decontamination	13
kitchenette	281
Unreinforced CMU	125
concrete slab	25
Untreated wood piles	19
Urethane carpet pad	248, 249
coat floor	241
insulation	174
Urinal	251
Utility cabinet tall	220

V

Vacuum cleaner HEPA	13
Vane weather	290
Vanity cabinet tops	234
cabinets	231
lavatory sink	253, 254
Vapor barrier exterior	46, 172
barrier floor	168
barrier slab	26
barrier wall	170
Veneer brick	126
slumpstone	130
Vent	288
cap	147
ridge	74, 289
Vented rangehood	276
Ventilator spinner	288
Ventless rangehood	277
Vinyl base molding	203
clean wax	245
fascia	67
sheet	245
sheet floor	245
siding	134
sliding patio door	100
soffit	69
tile	245
wallcovering solid	185
window	113
Vinyl-coated wallcovering	184, 185

W

W or fink truss	54
Waffle carpet pad	248, 249
Walk impregnated	88
Wall asbestos seal	13
brick	14
cabinets	211
cap coping	72
clean	10, 235
clean seal	236
earthquake strapping	36
end	72
framing	34
framing system	34
gas-fired furnace unit	154
headers	37
hung toilet	251
insulation	168
lath	176
mildicide	11
mirror	120
oven double	277
oven single	277
paint	236
paneling	182
patch	184
plaster	175
plate	37
prep	235
protect/cover	6, 235, 236
sand	235
seal	235
side	72
stem	24
stud	36
texture	236
tile	181
tile re-grout	180, 181
tile thick set	180
tile thin set	180
type radiant	159
vapor barrier	170

Wallboard accessories	179
finished	177
texture	179
unfinished	178
Wallcovering	184
border	186
Walnut floor	240
parquet floor	242
Wash sewage pressure	11
Washer	279
dryer	279
Water extraction	10
heater	148
heater cap	289
pump pool	292
service	3
softener	150
Wearing course	139
Weather vane	290
Welder	5
Wet fog / ulv area	11
Whirlpool bathtub	256
Whole-house exhaust fan	269
Window awning sash aluminum	110
bay aluminum	111
bullet resistant	120
casement bow wood	117
casement wood	116
casing	206
casing double	206
casing single	205
casing triple	206
double hung aluminum	108
double hung vinyl	113
double hung wood	114
glass	119
hardware aluminum	113
mounted air conditioning	162
picture wood	118
rough-in	40
screens	118
sill	206
single hung	106
sliding sash aluminum	109
steel	124
storm aluminum	112
treatment	273
trim set	205
trim set aluminum	113
trim set wood	118
vented steel	124
Wire support	168
Wired glass window	120
Wiring 120v	261
240v	261
run	268
Wood base cabinet	223, 224
beam solid	27
bypass sliding door	200
deck	57
deck stair	57
door bifold	196
door pre-hung	191, 195
foundation post	23
framed sliding patio door	100
parquet tile floor	241
piles treated	19
piles untreated	19
plank flooring	239
screen door	101
shingle siding	136
shingles	75
shingles cedar	75
shutter	274
shutters interior	286
storage shed	291

Index

tall cabinet	218
vanity cabinet	231, 232
wall cabinet	212, 214
window	114
window sill	206
Wood-framed building	9
Wool carpeting	246, 248
Wrap water heater insulating	150
Wrought iron fencing	144

